




asym_atl1

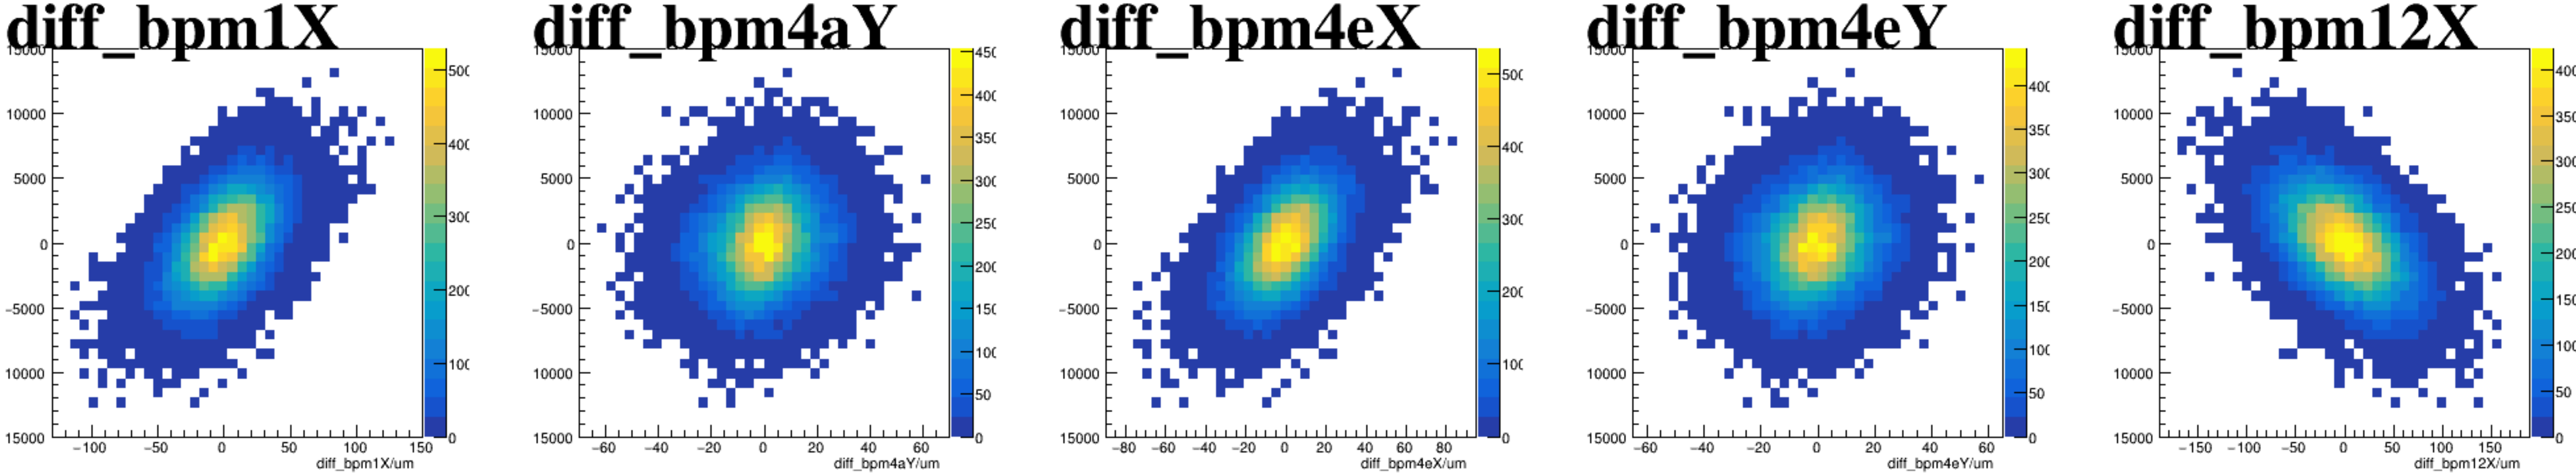


asym_atr1

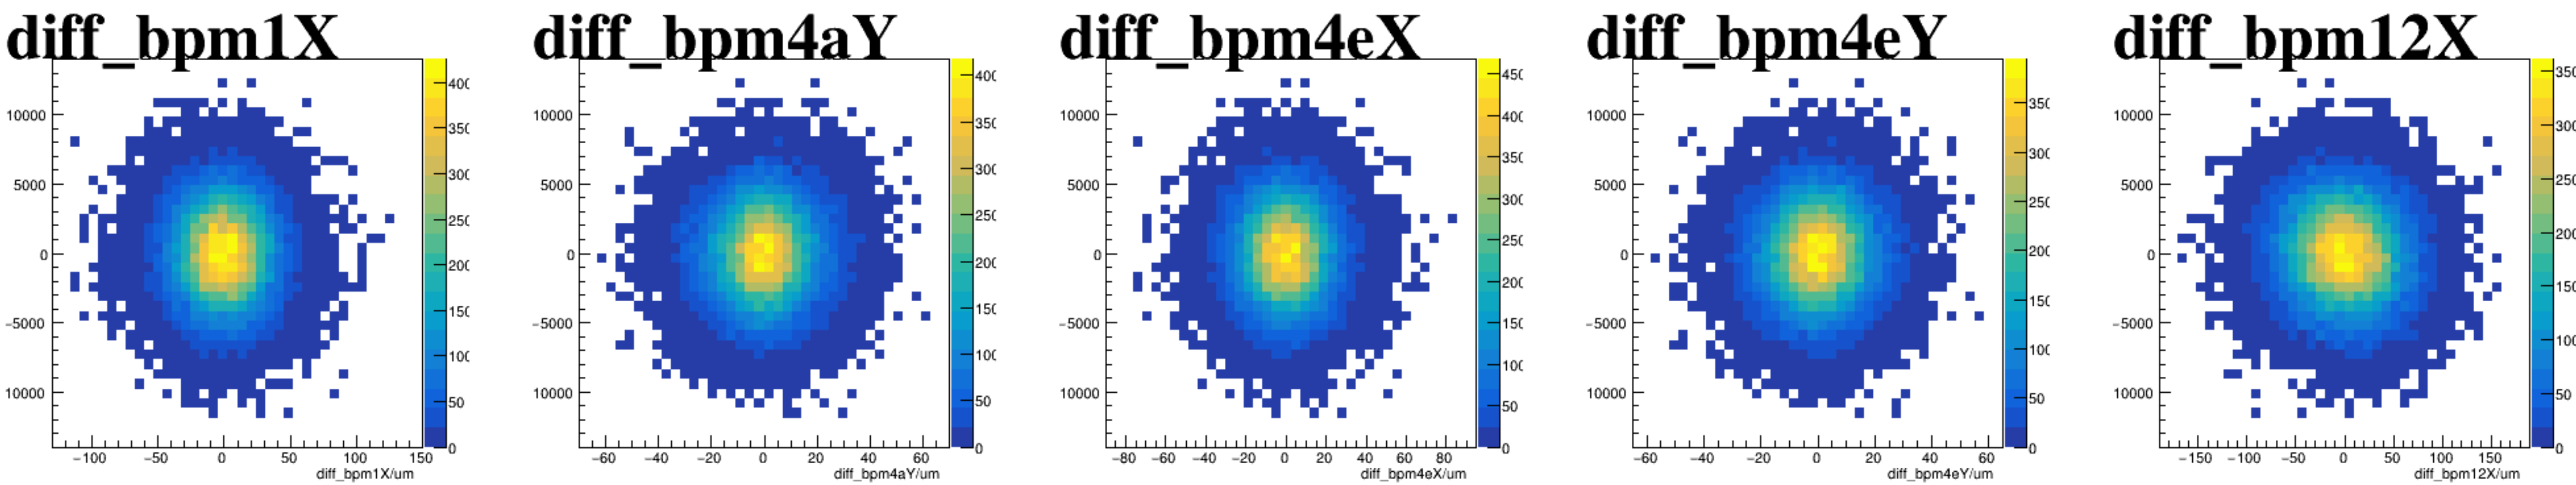


asym_atl2

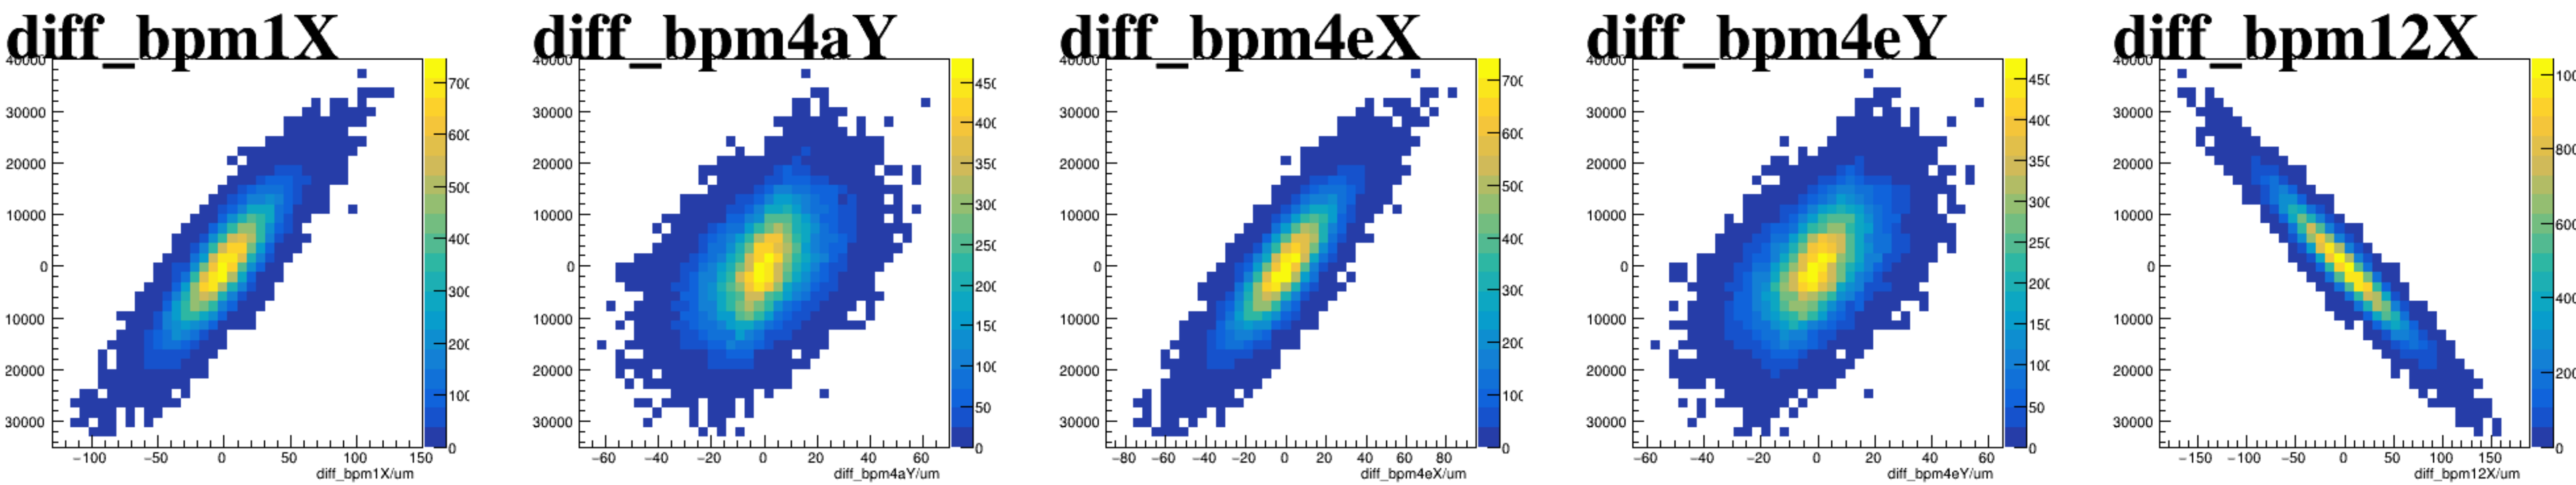


asym_atr2

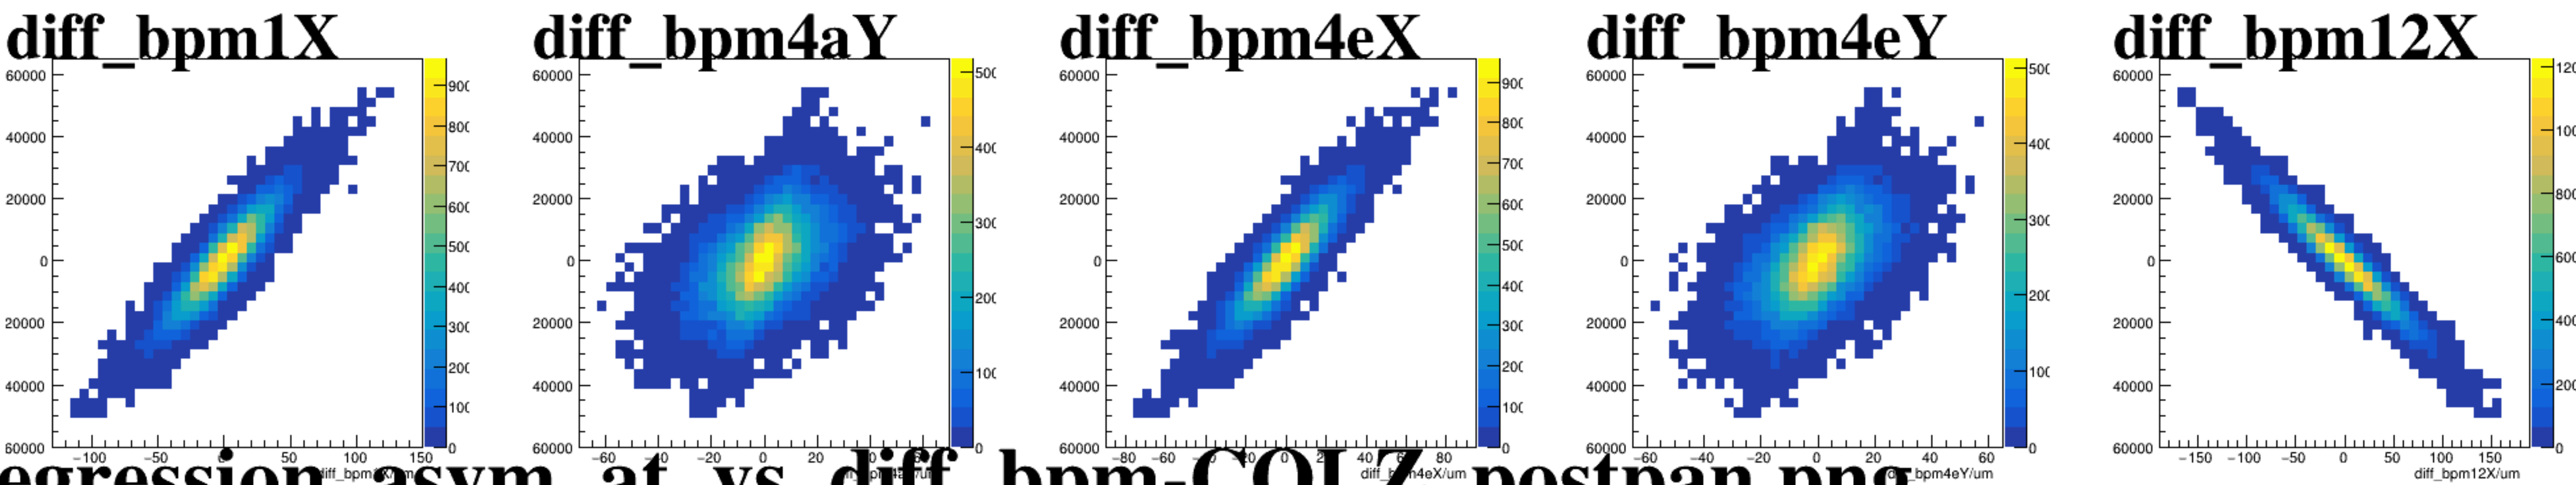


reg_asym_atl1

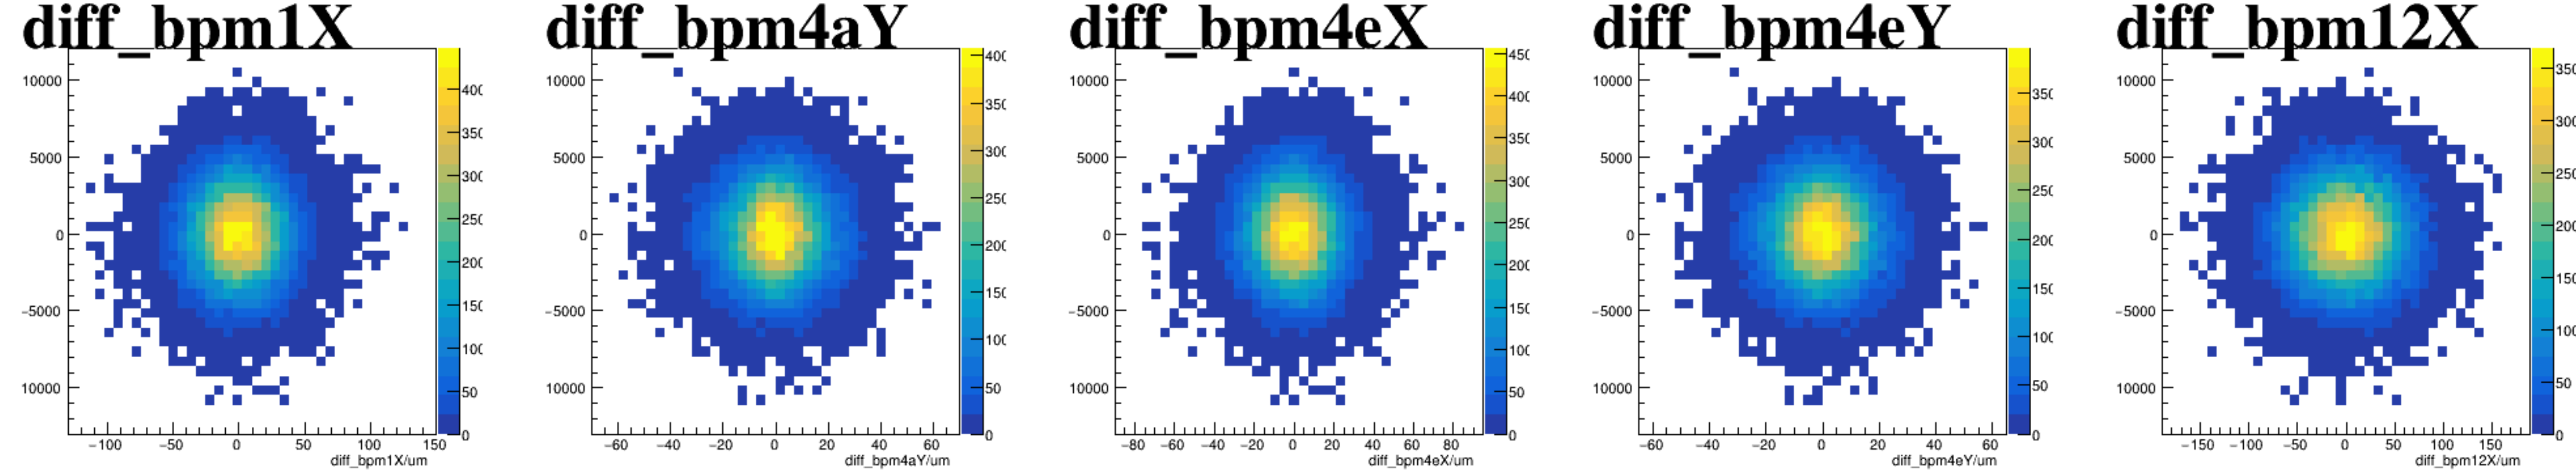


reg_asym_atr1

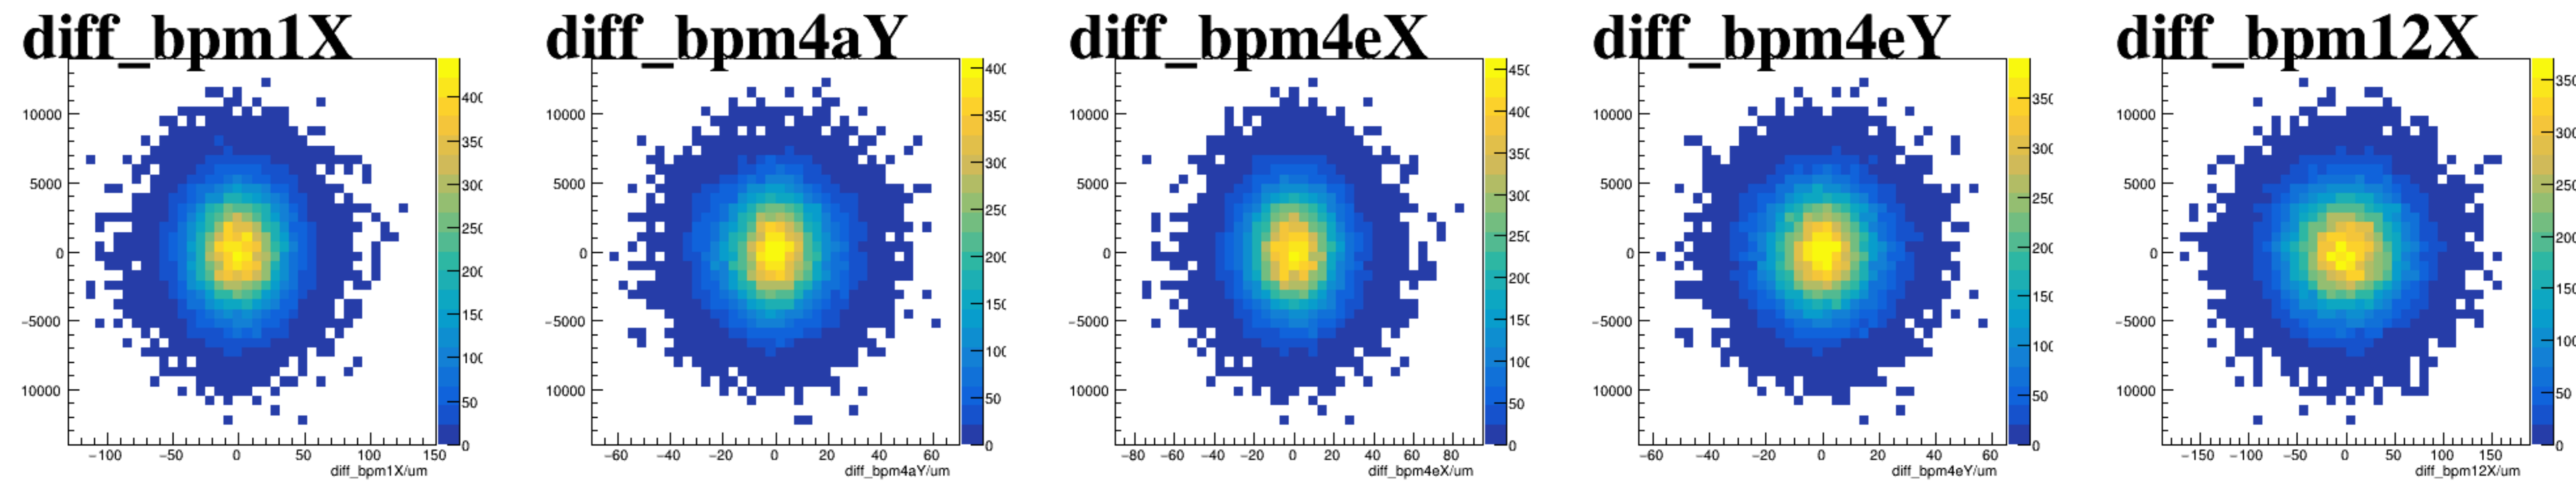






reg_asym_atl2

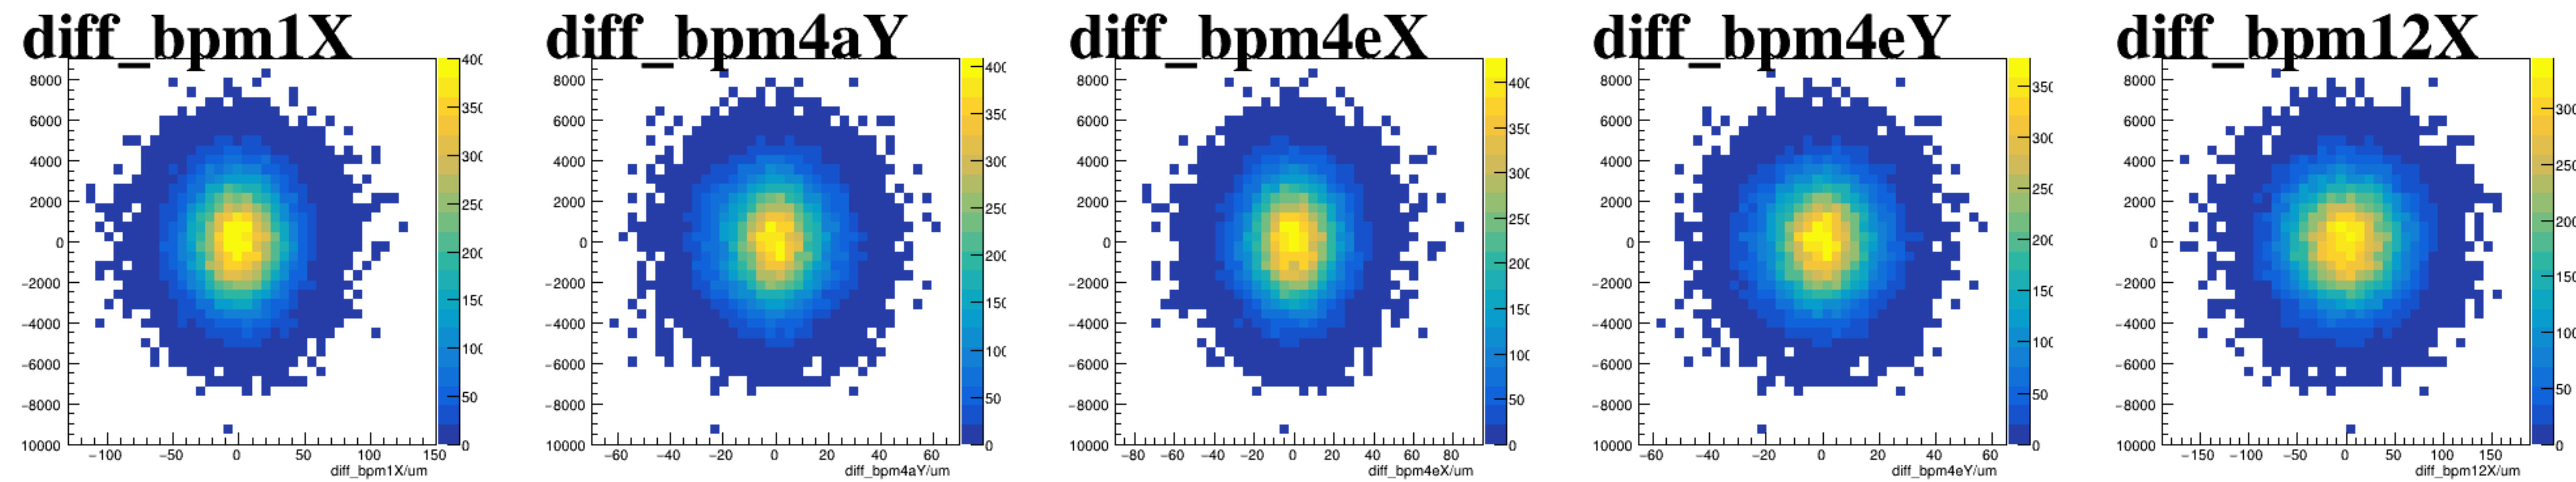






reg_asym_atr2

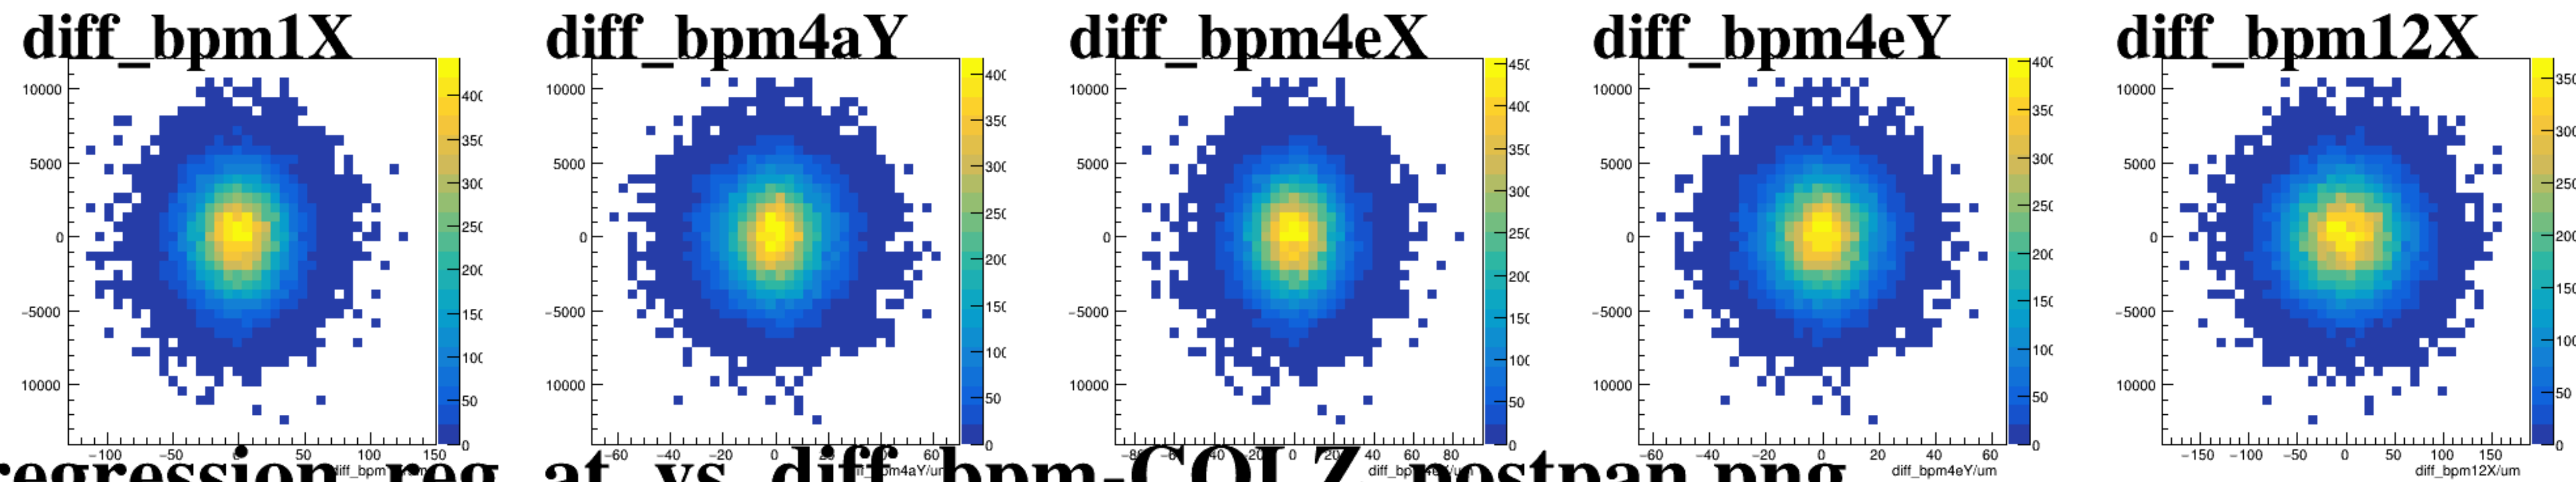






asym_atl1

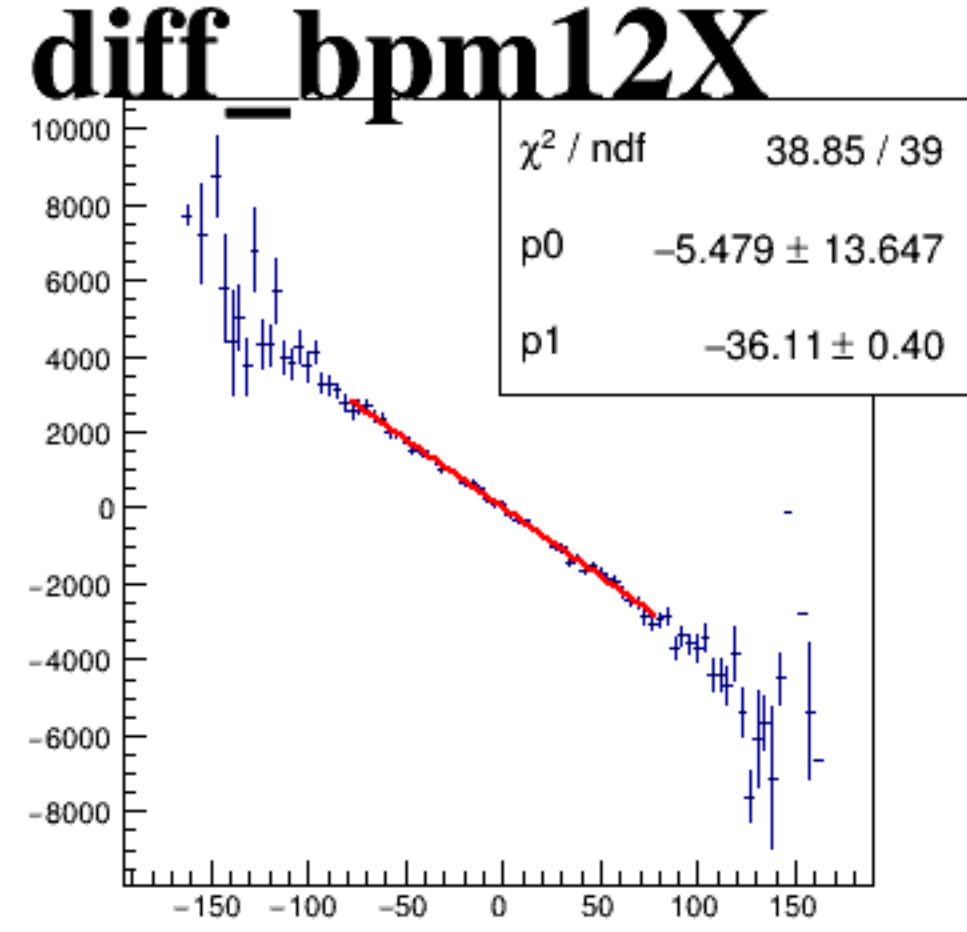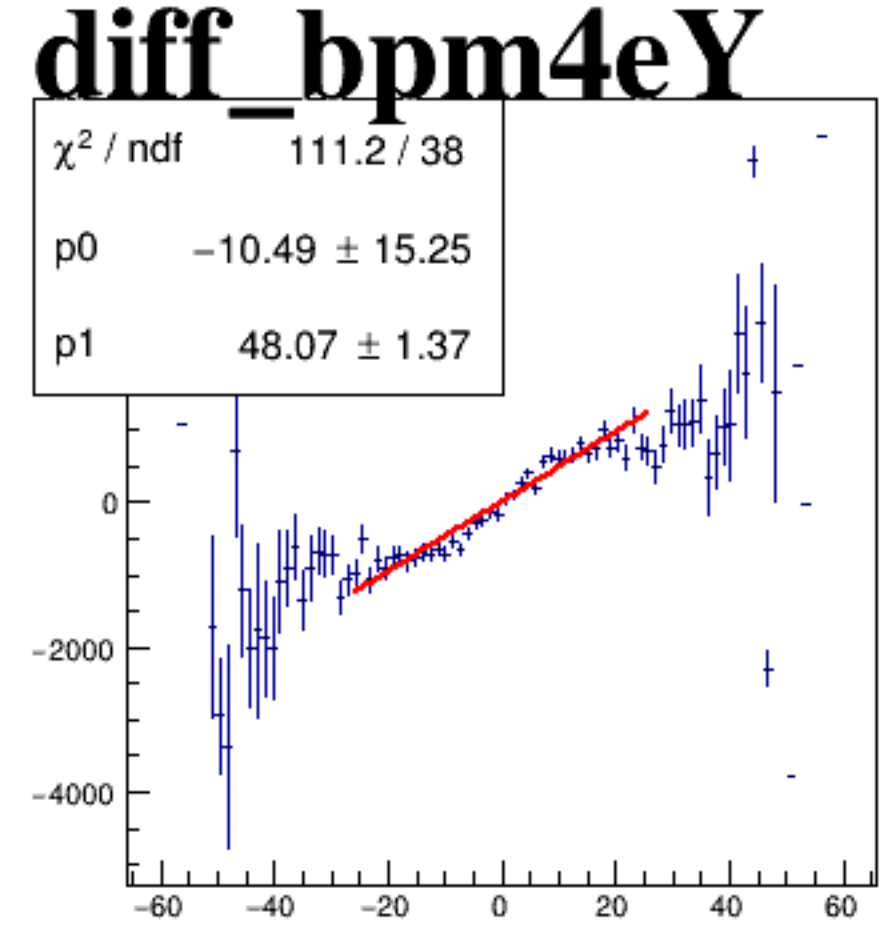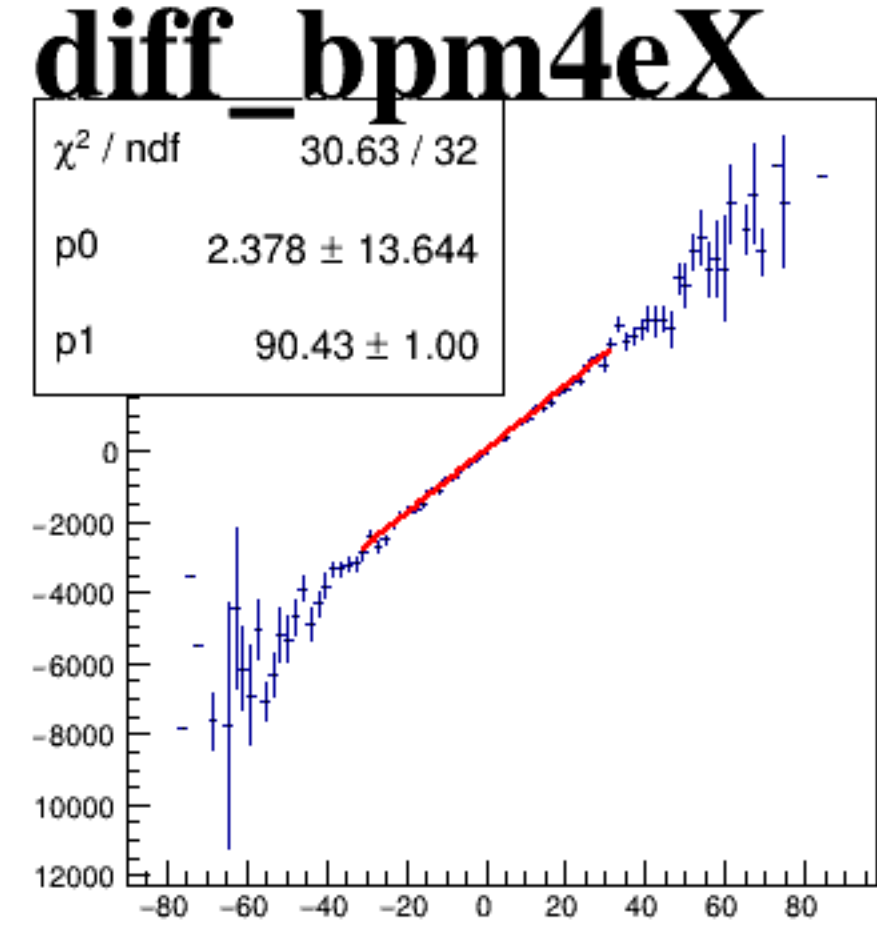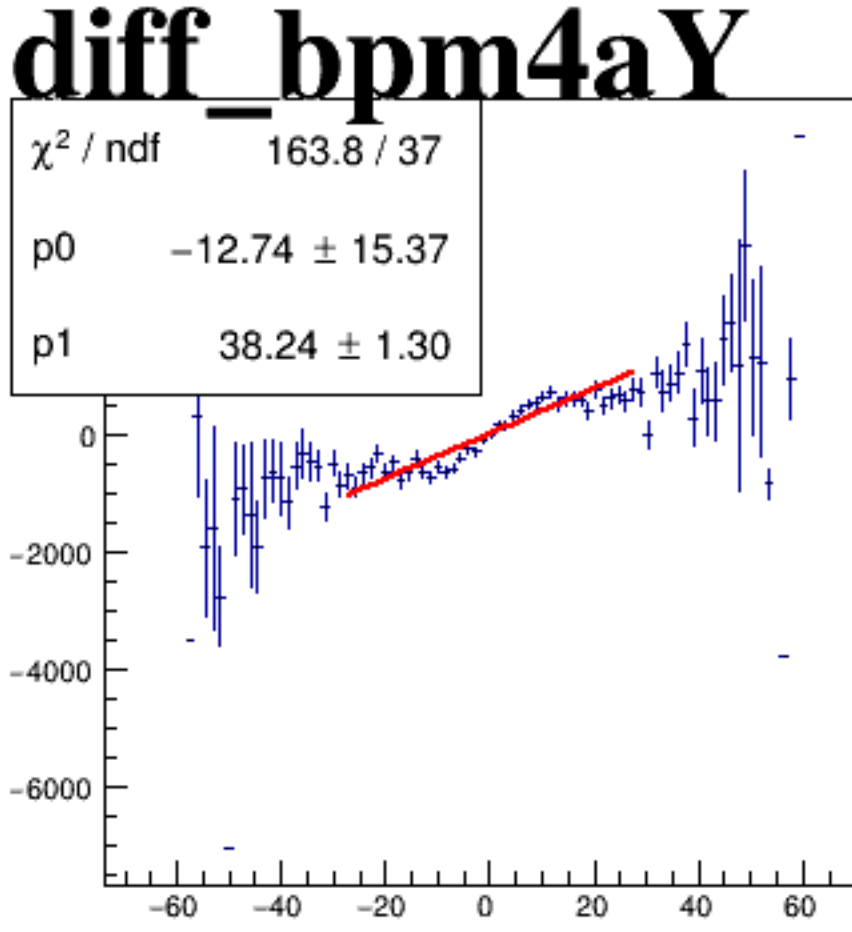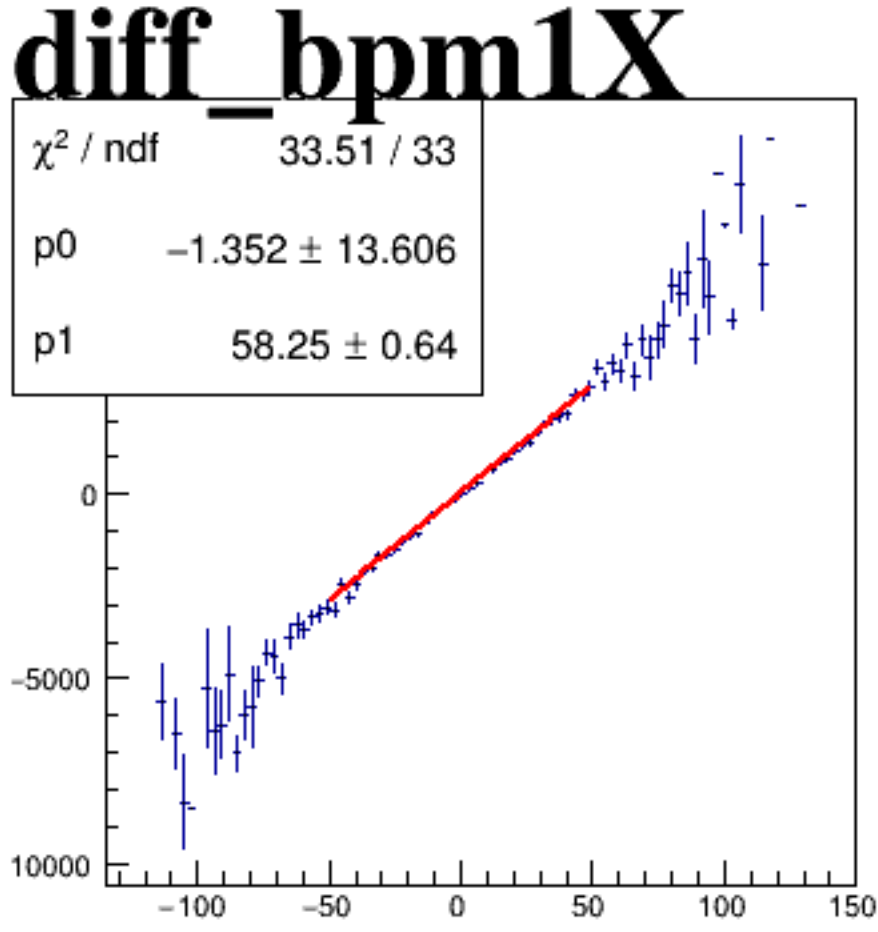






asym_atr1

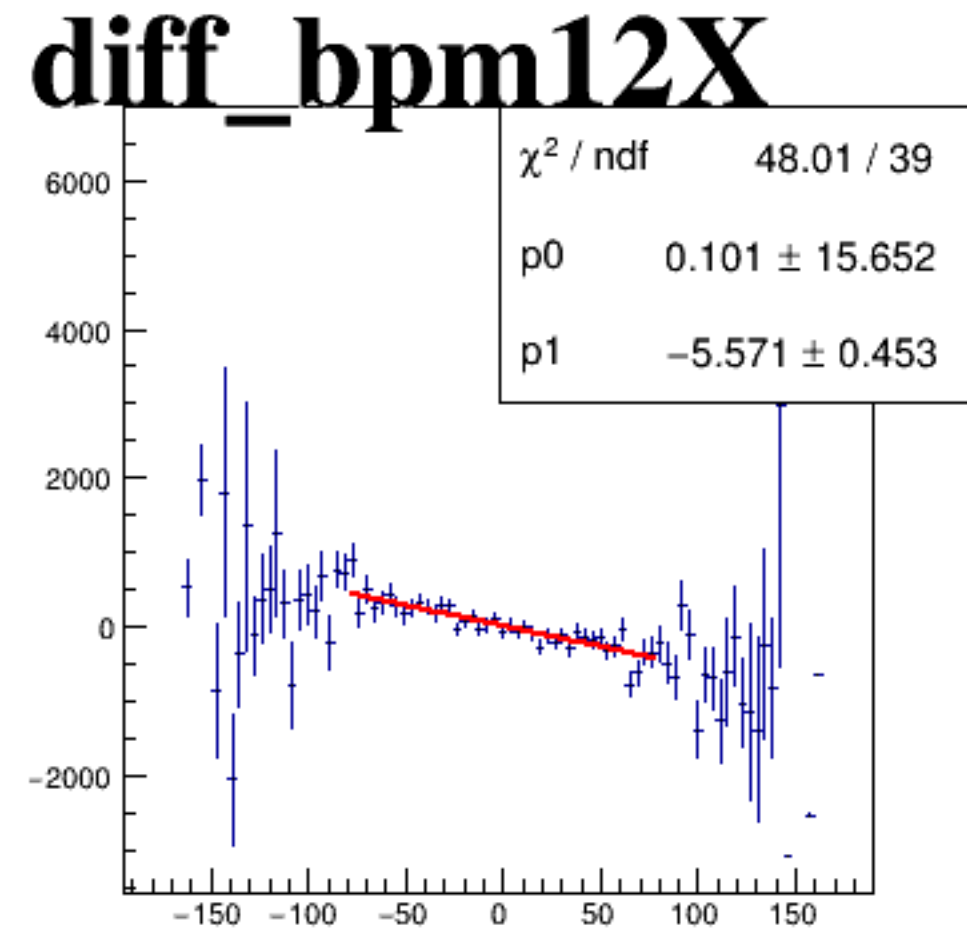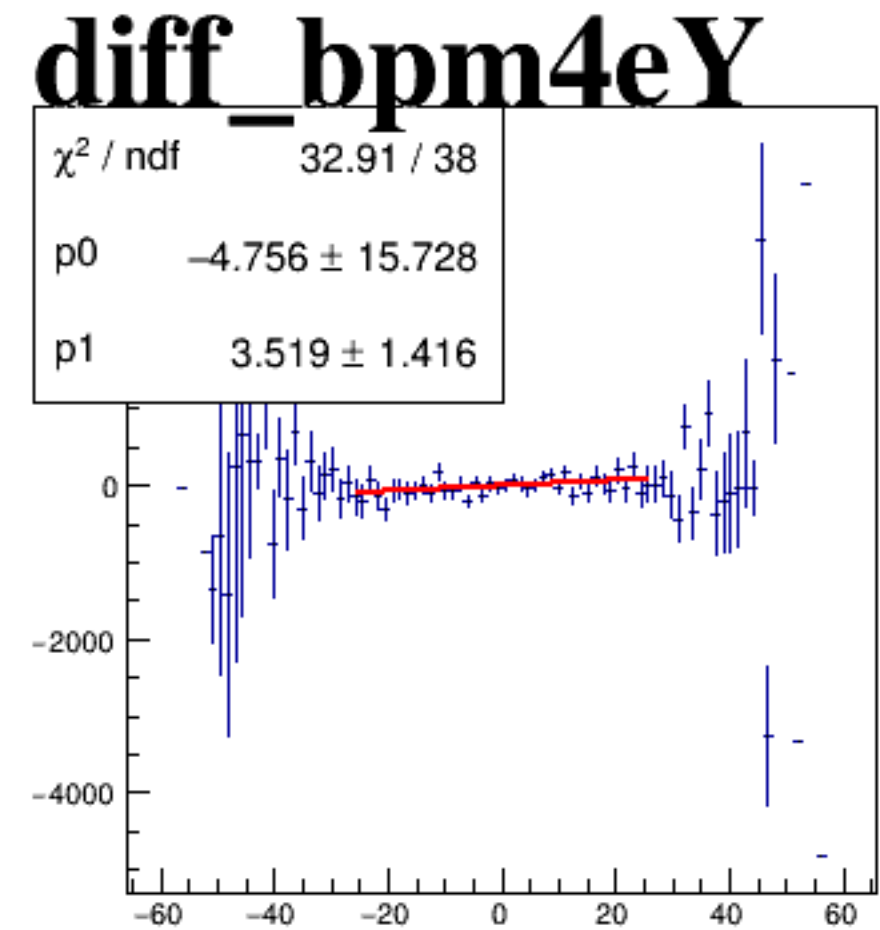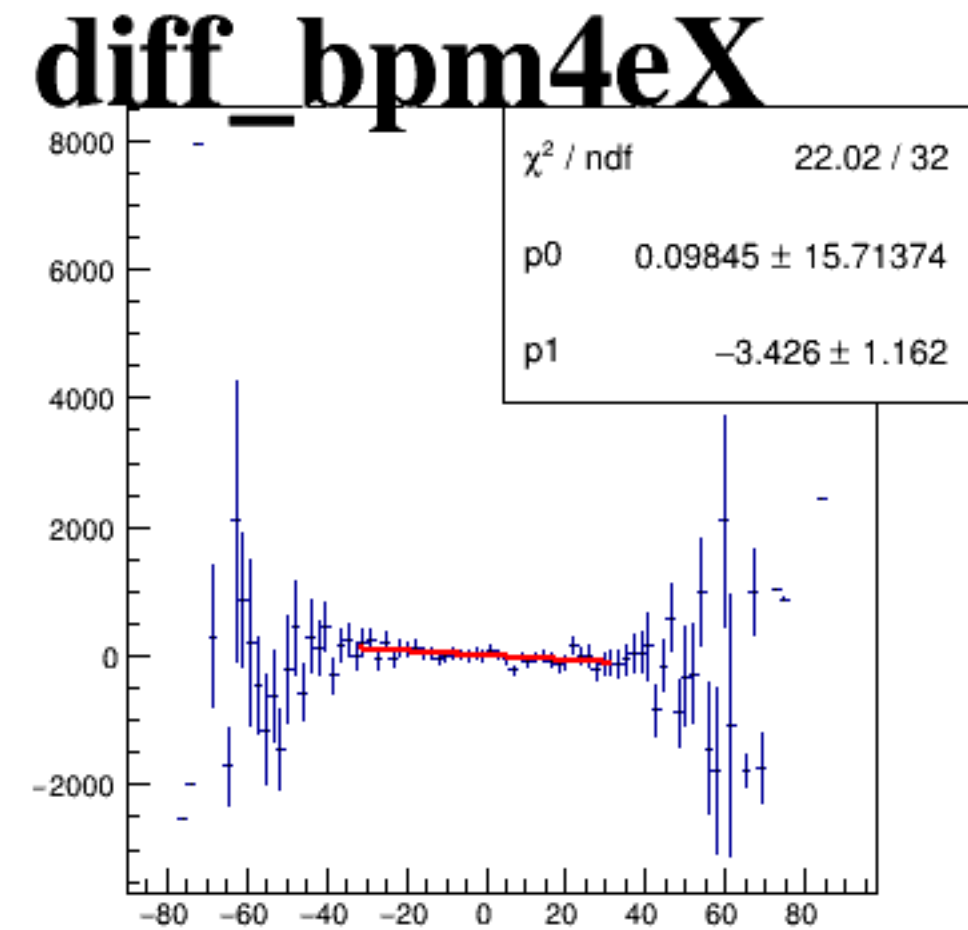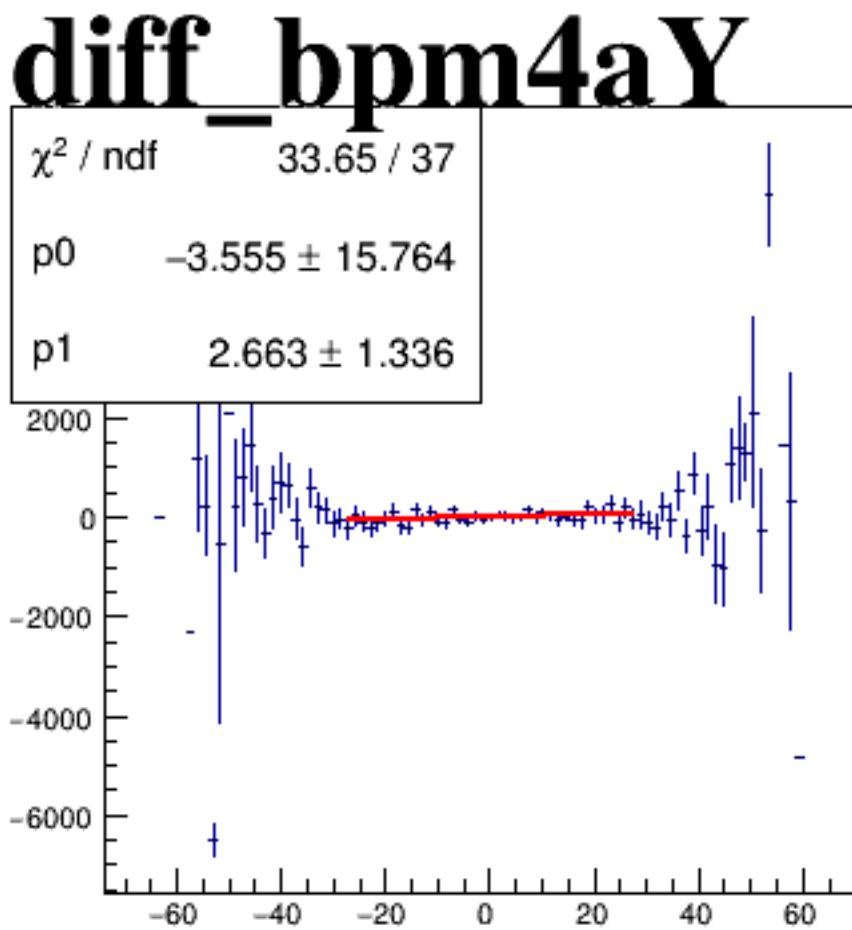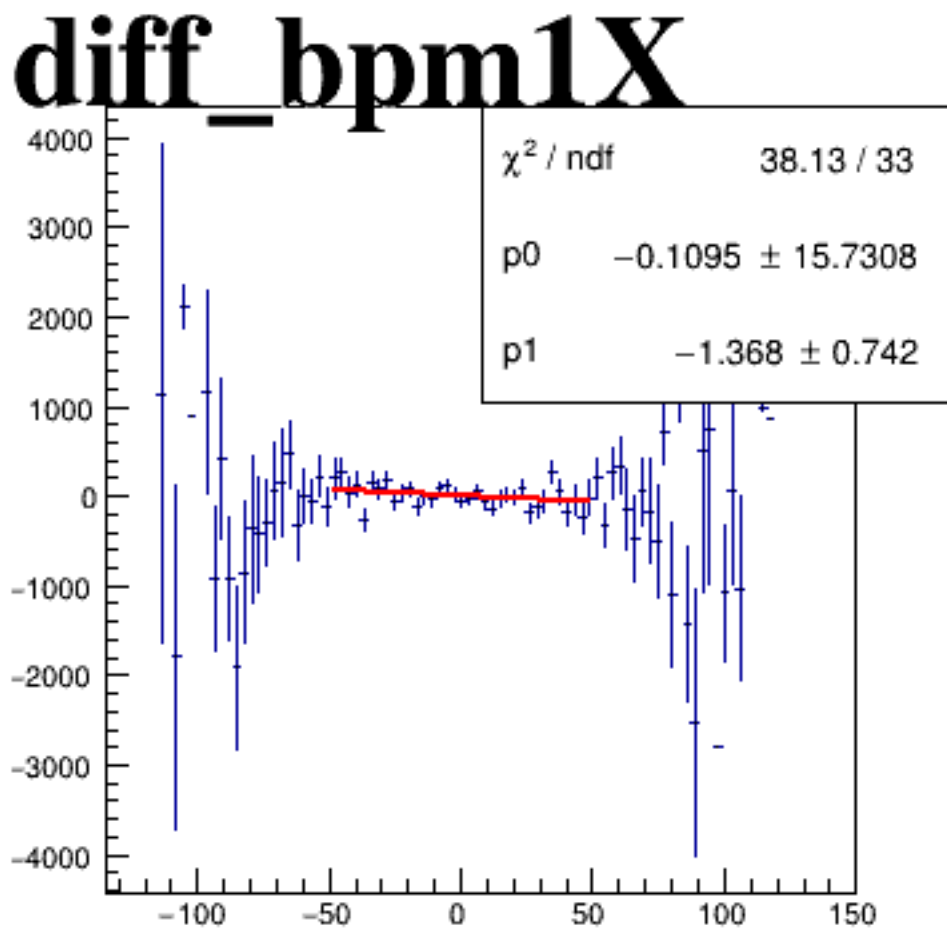






asym_atl2

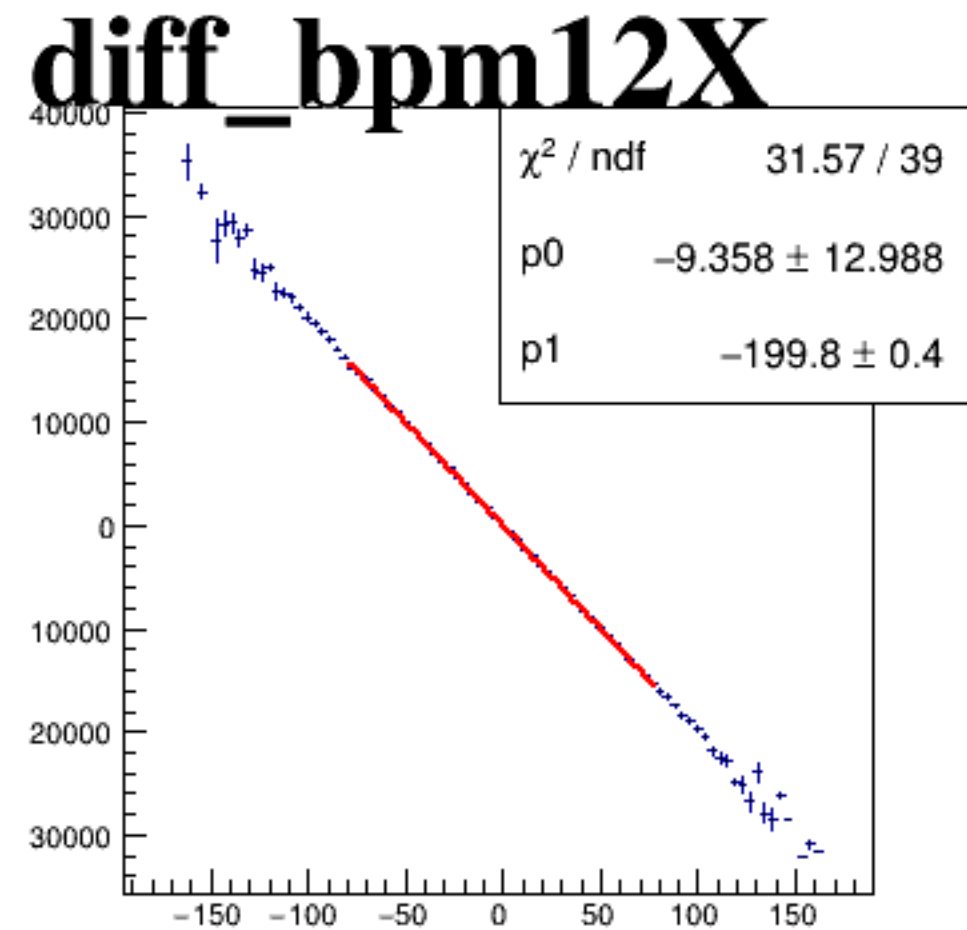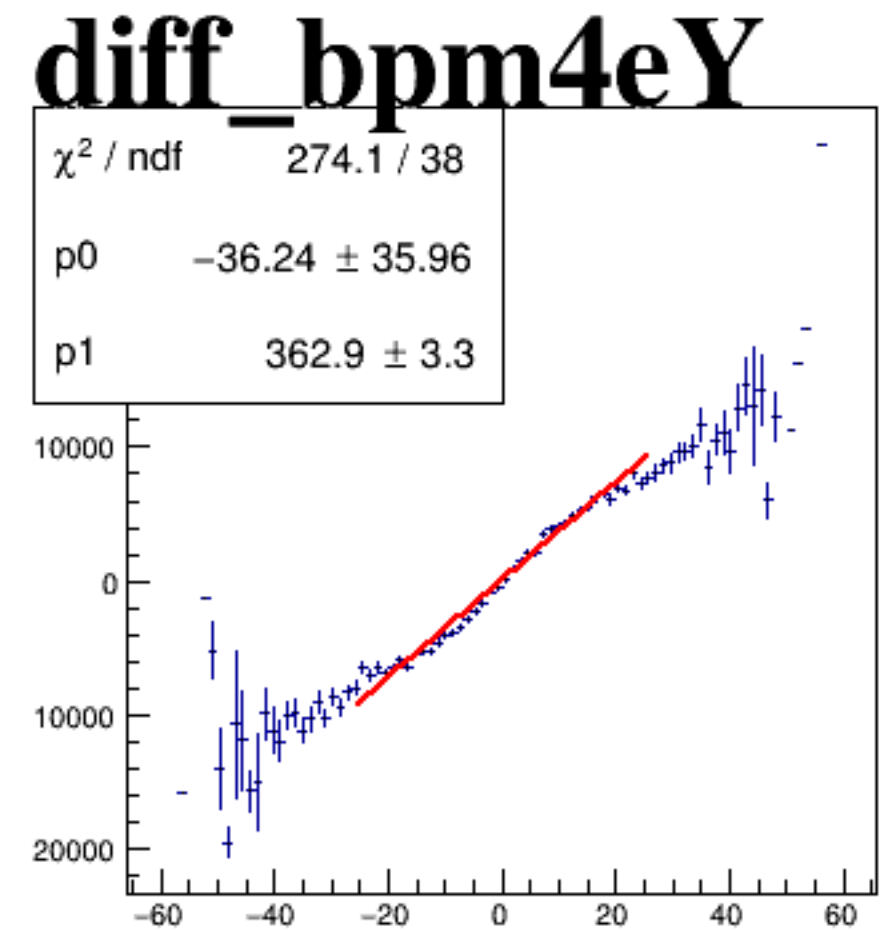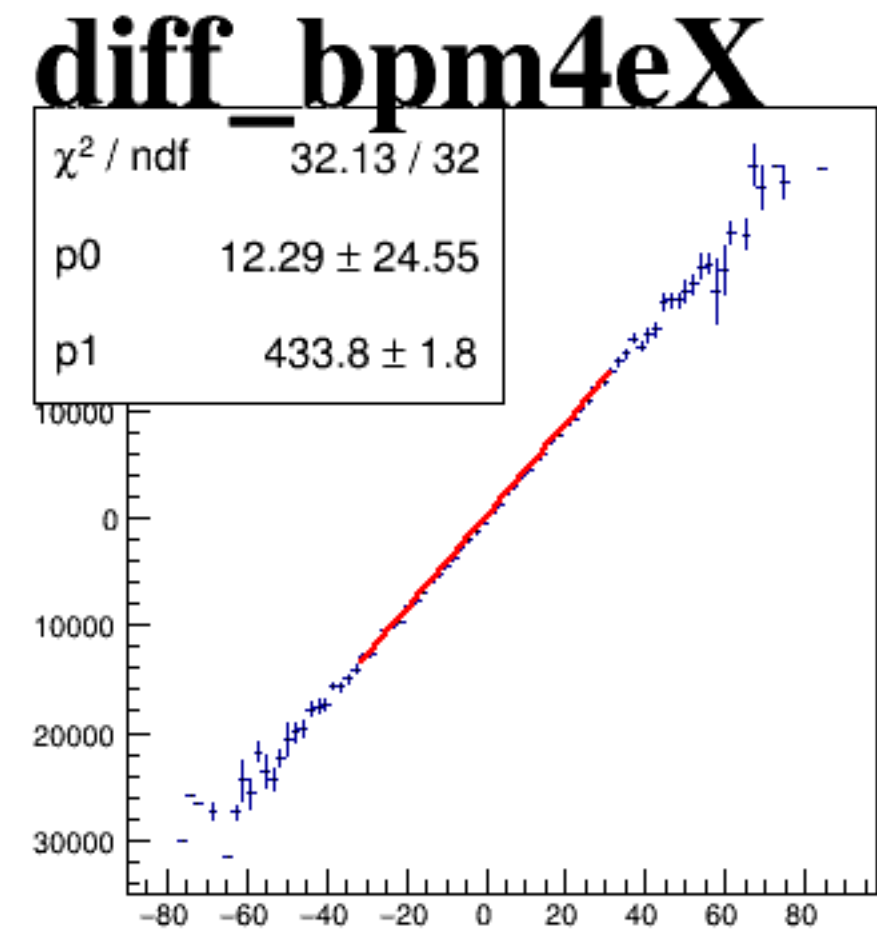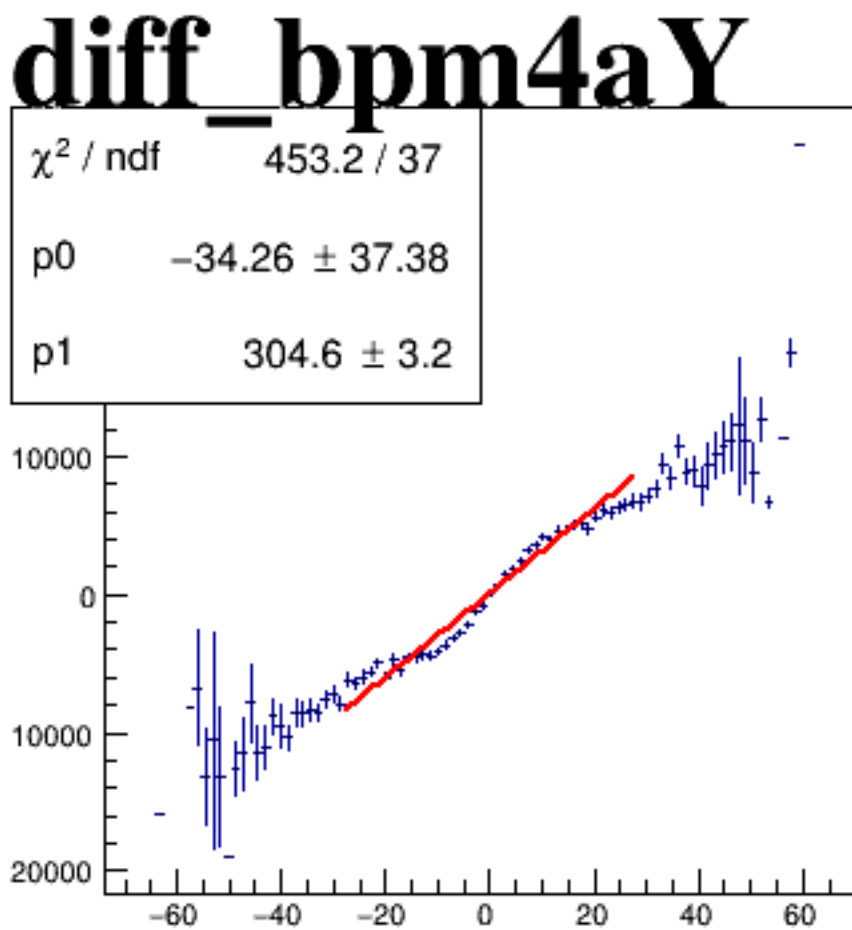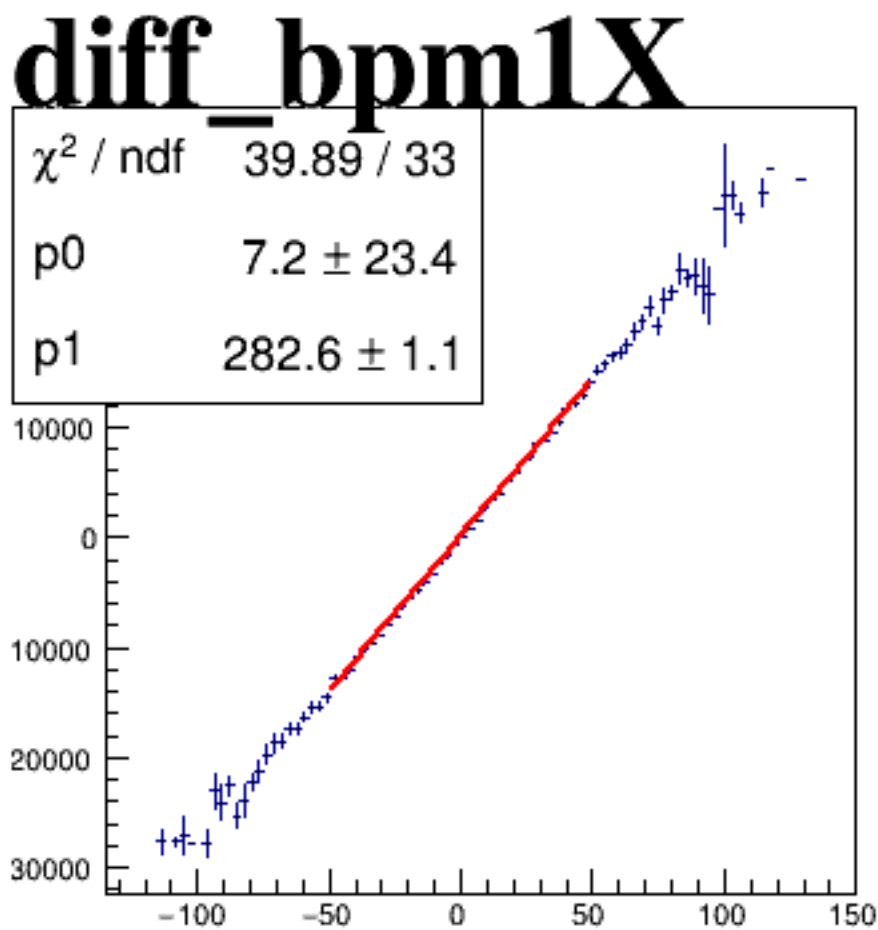






asym_atr2

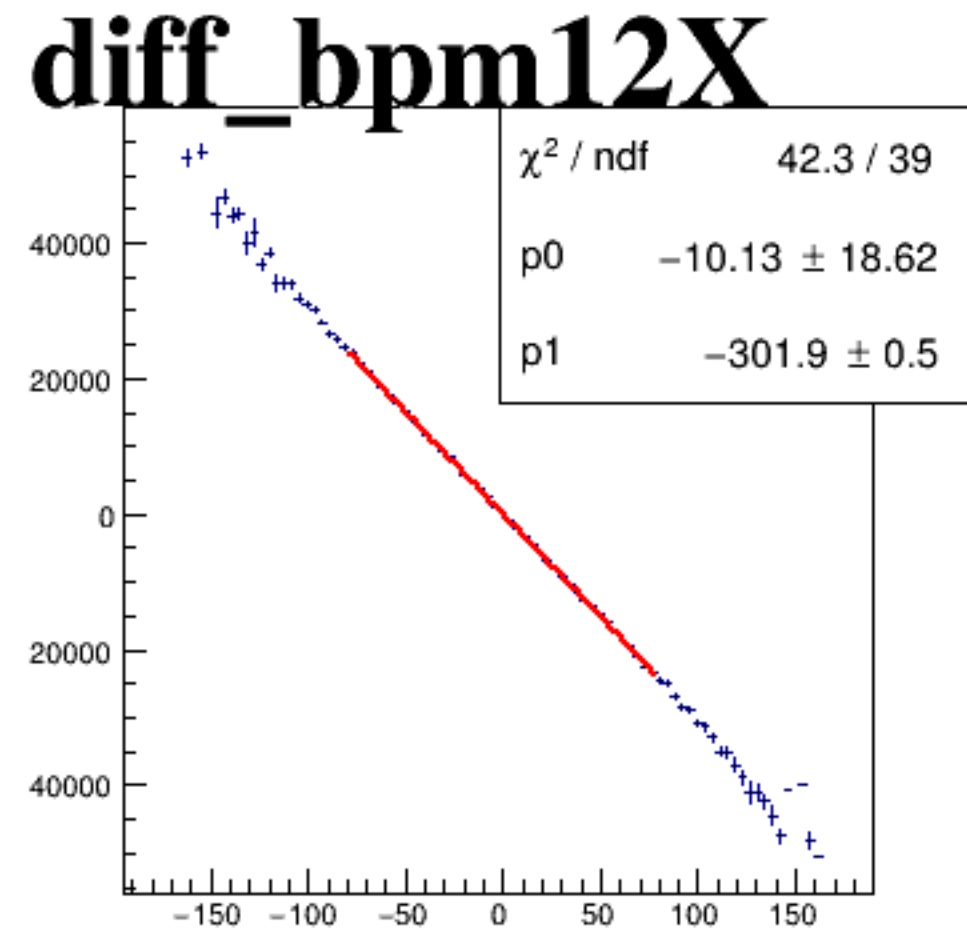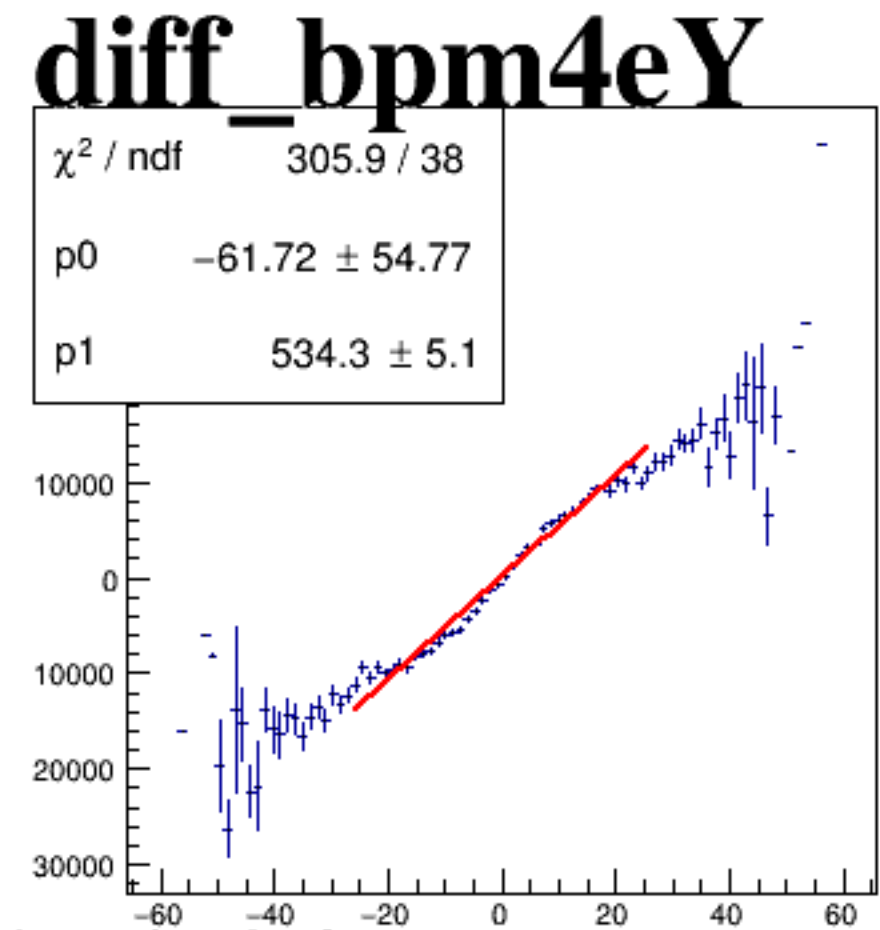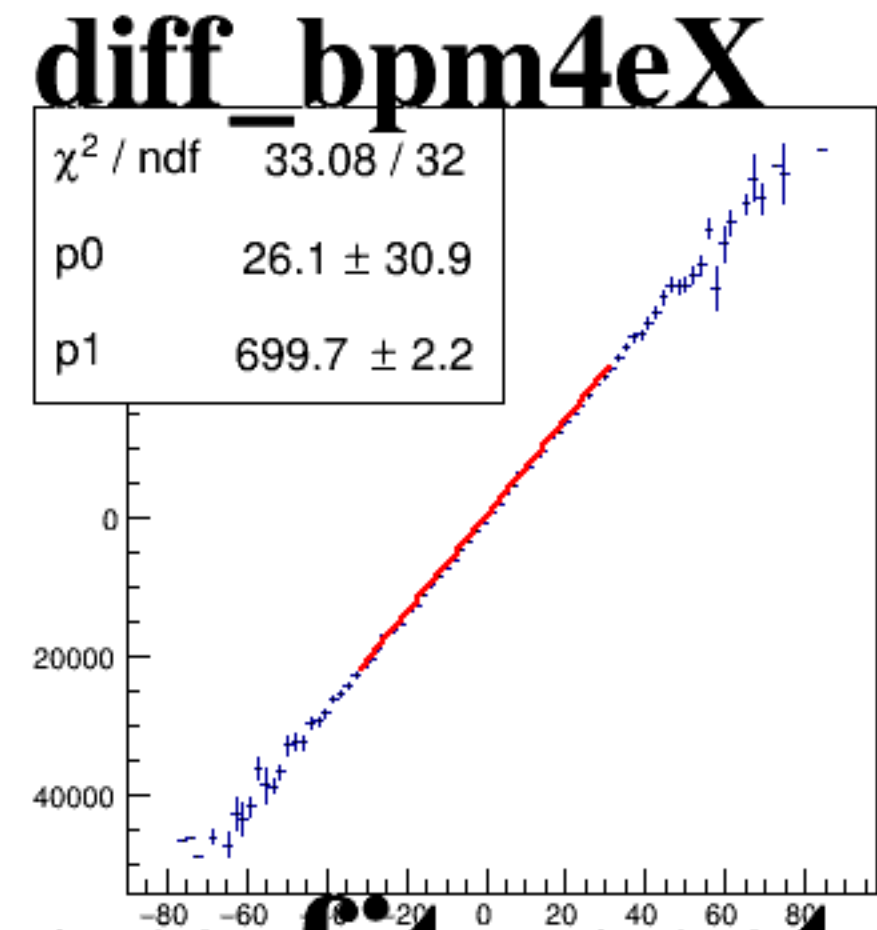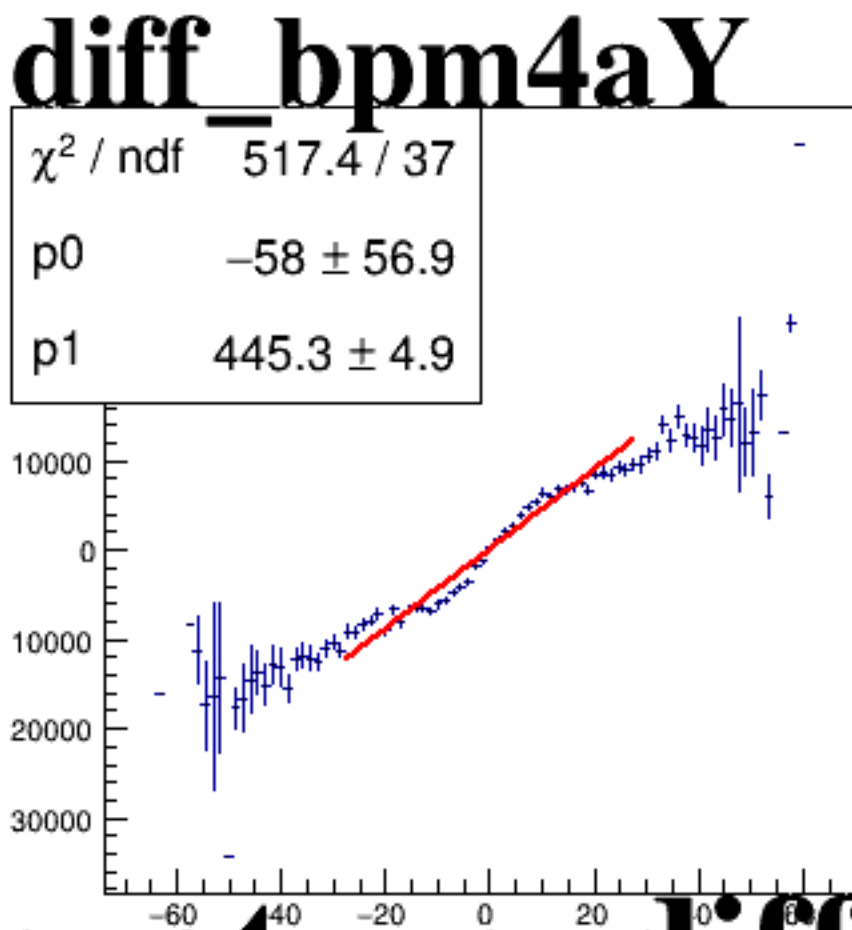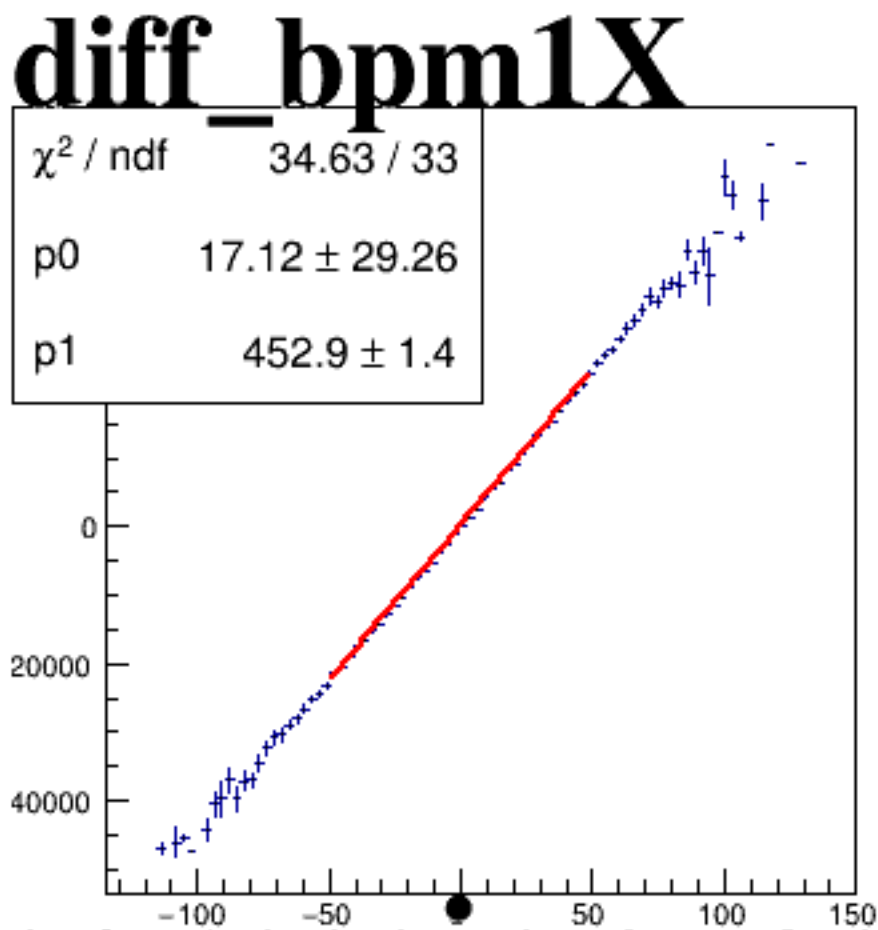






reg_asym_atl1

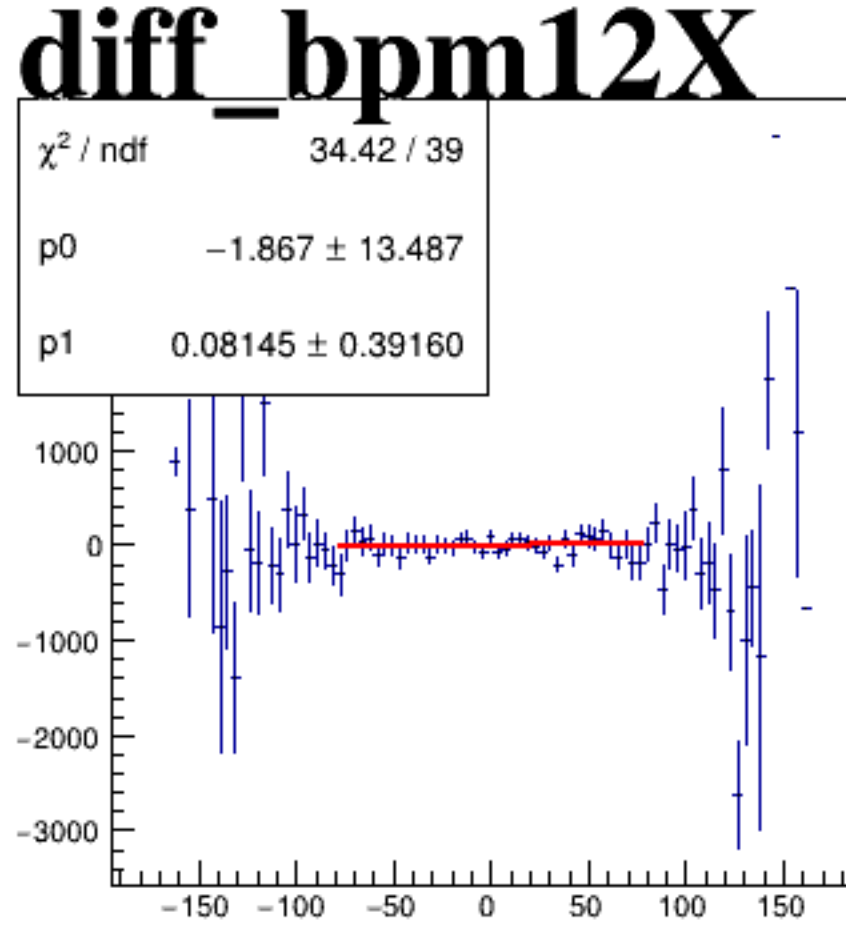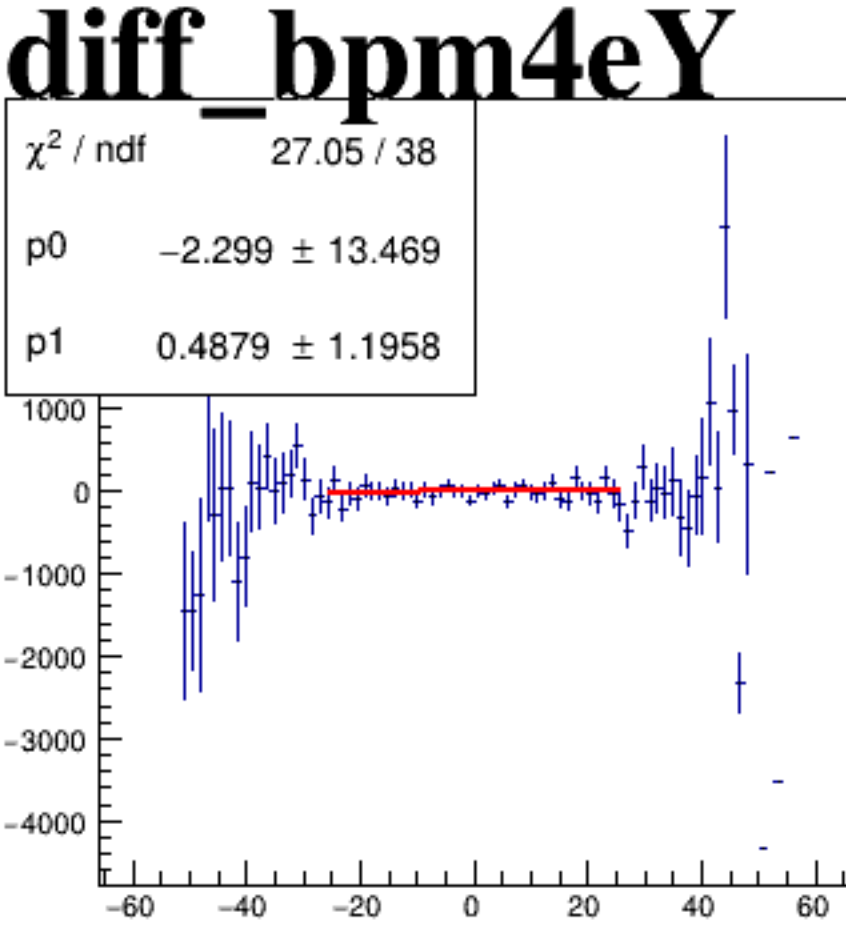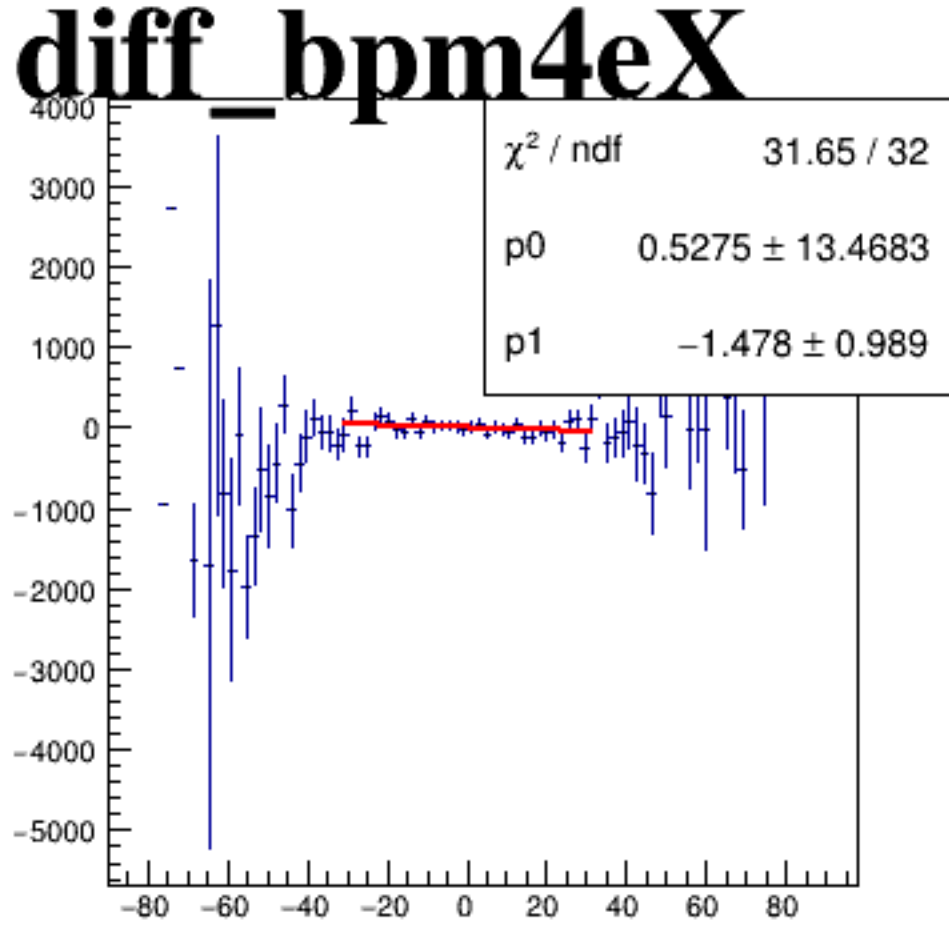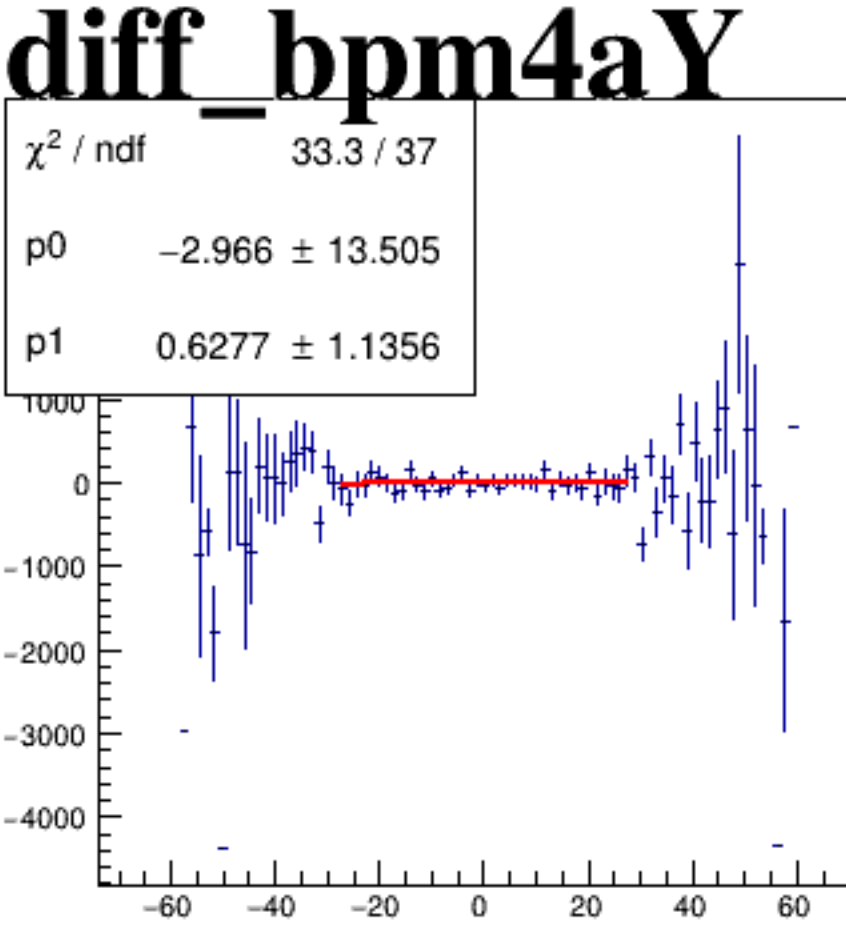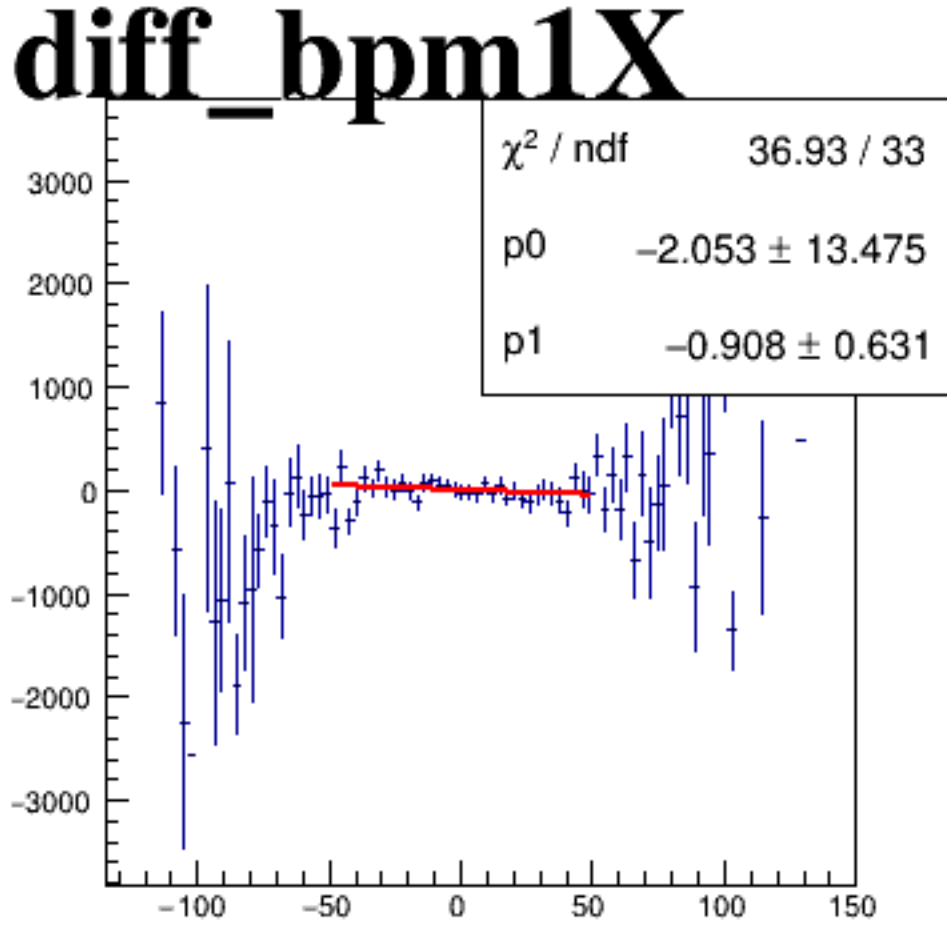






reg_asym_atr1

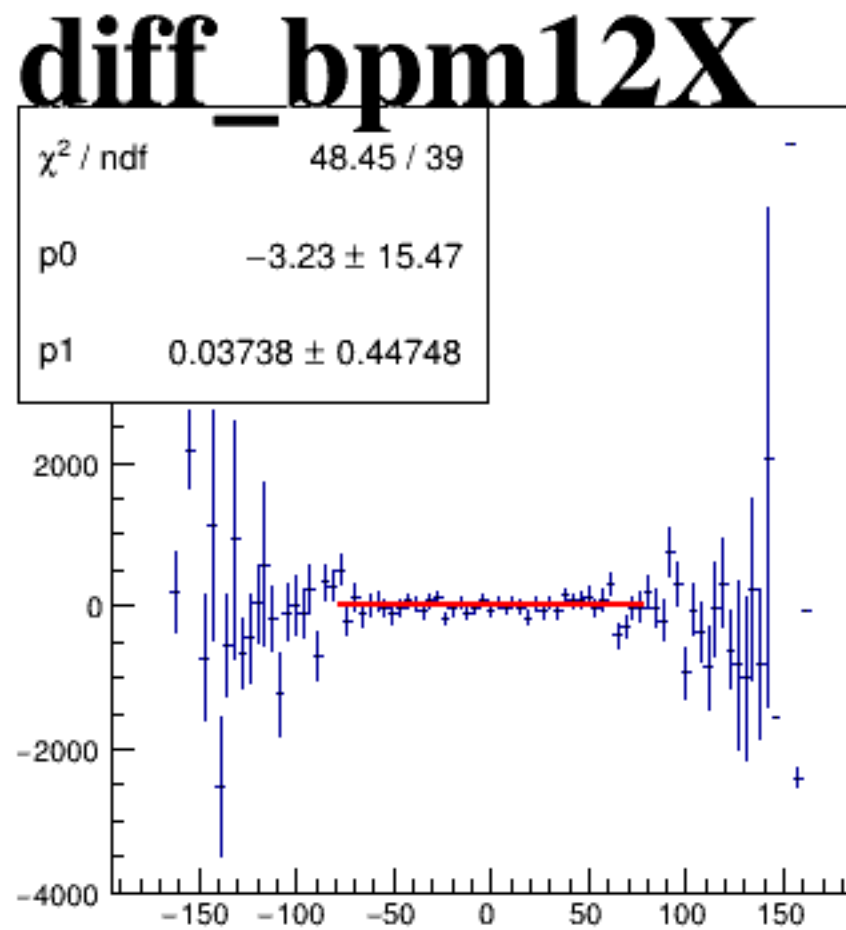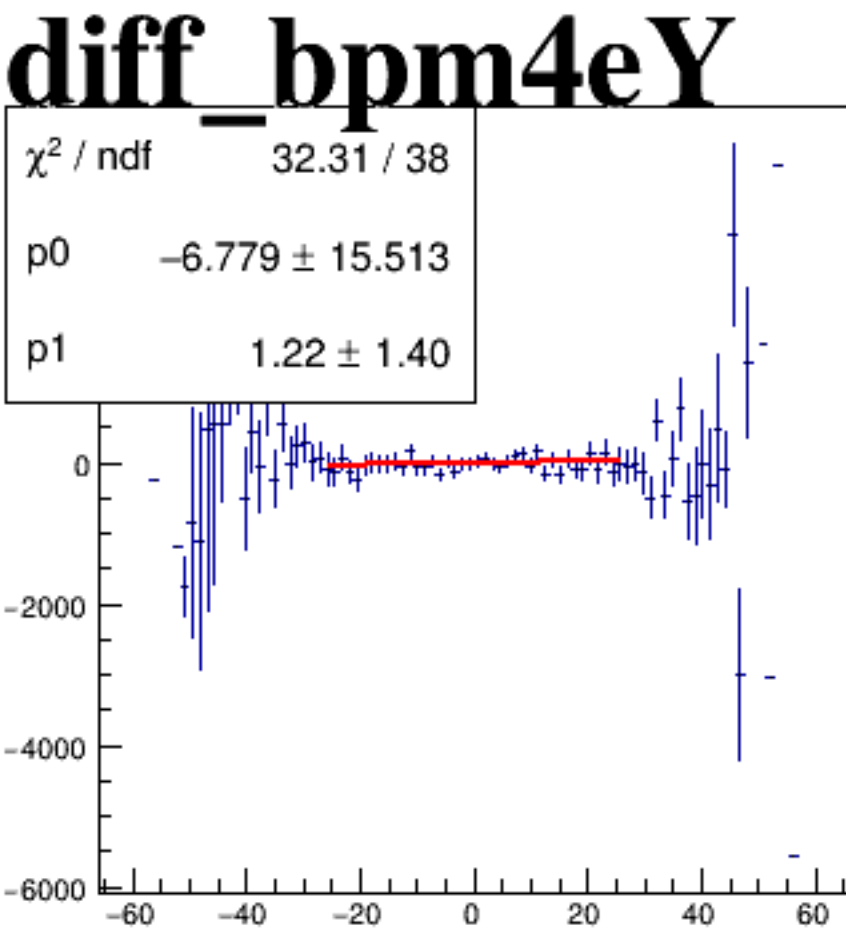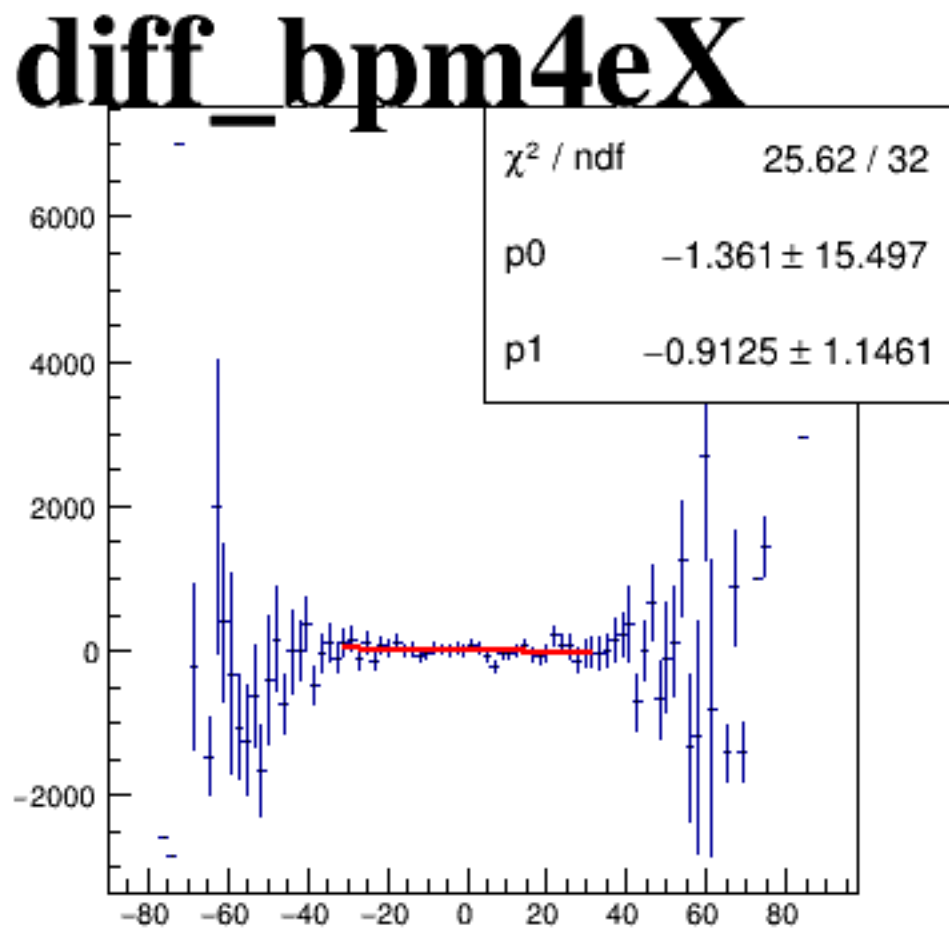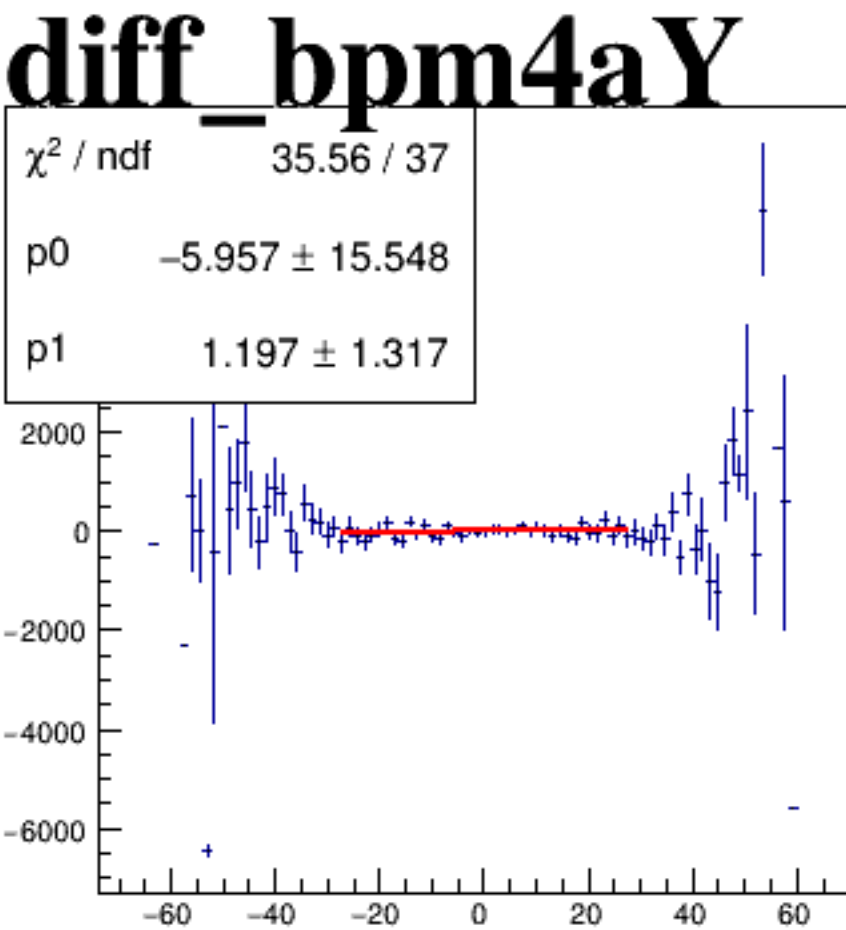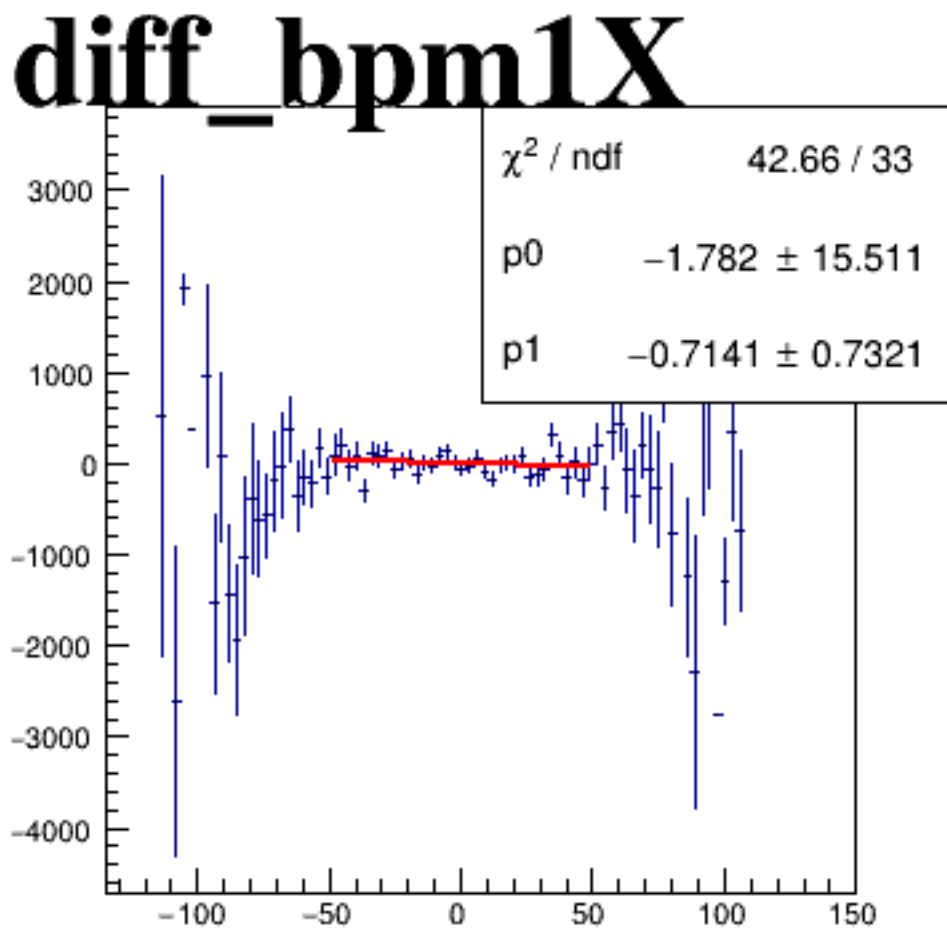






reg_asym_atl2

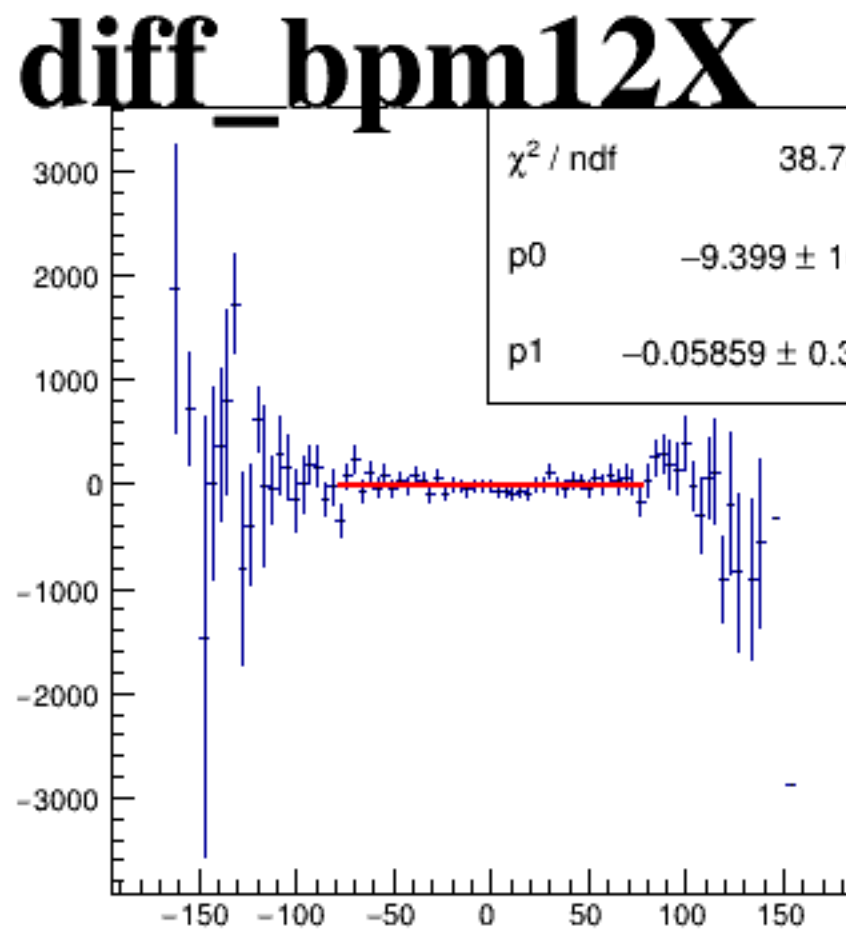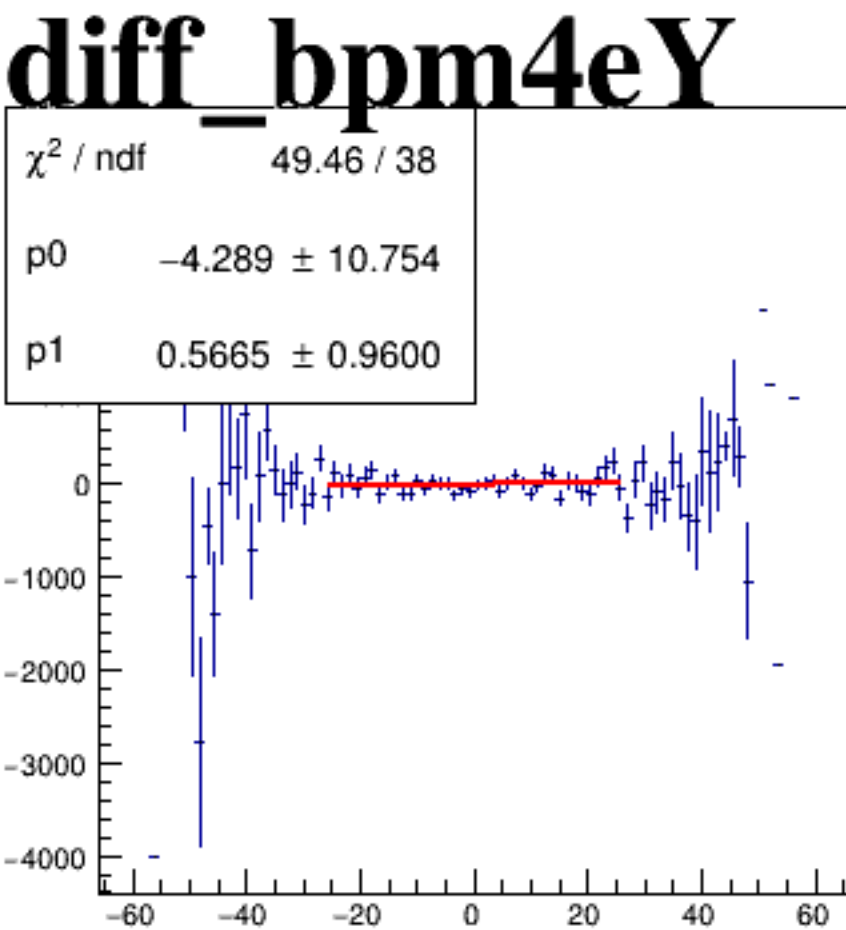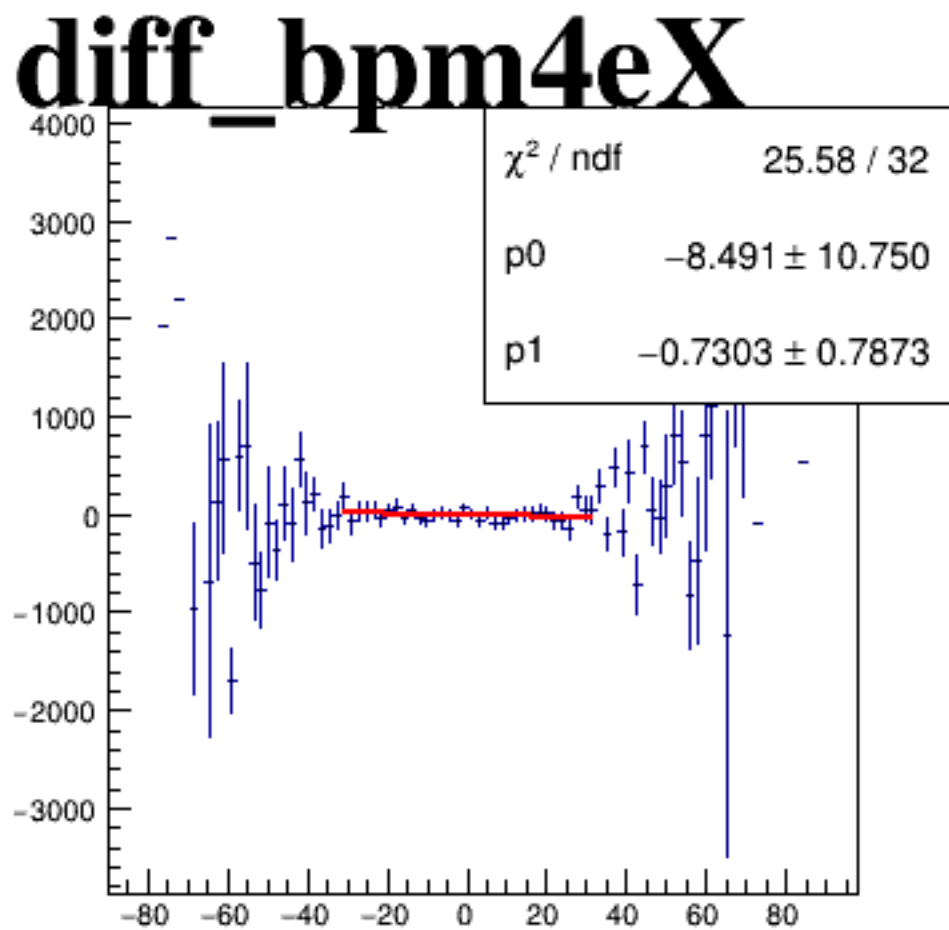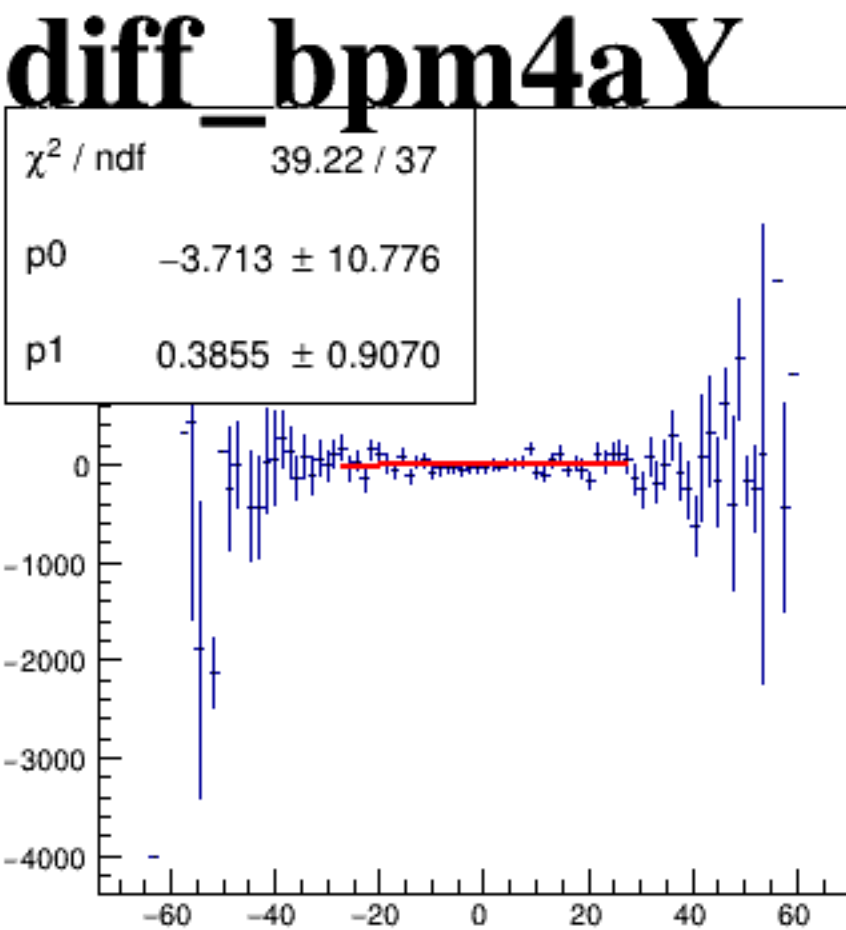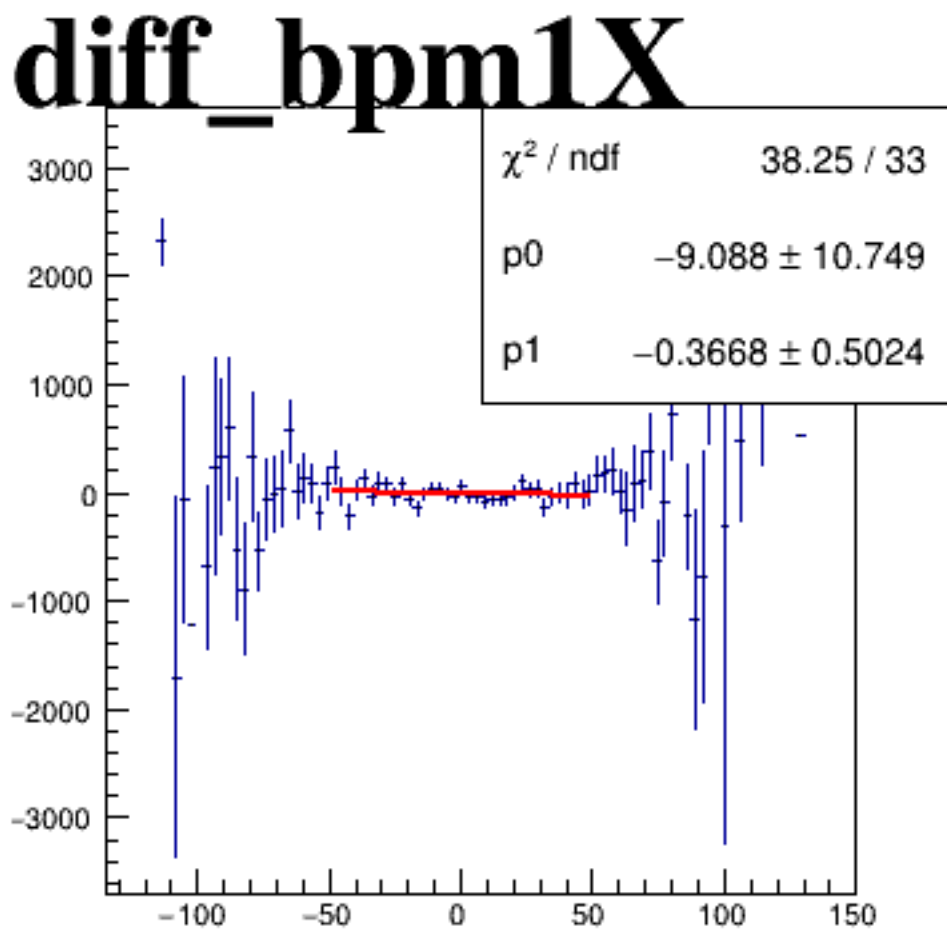






reg_asym_atr2

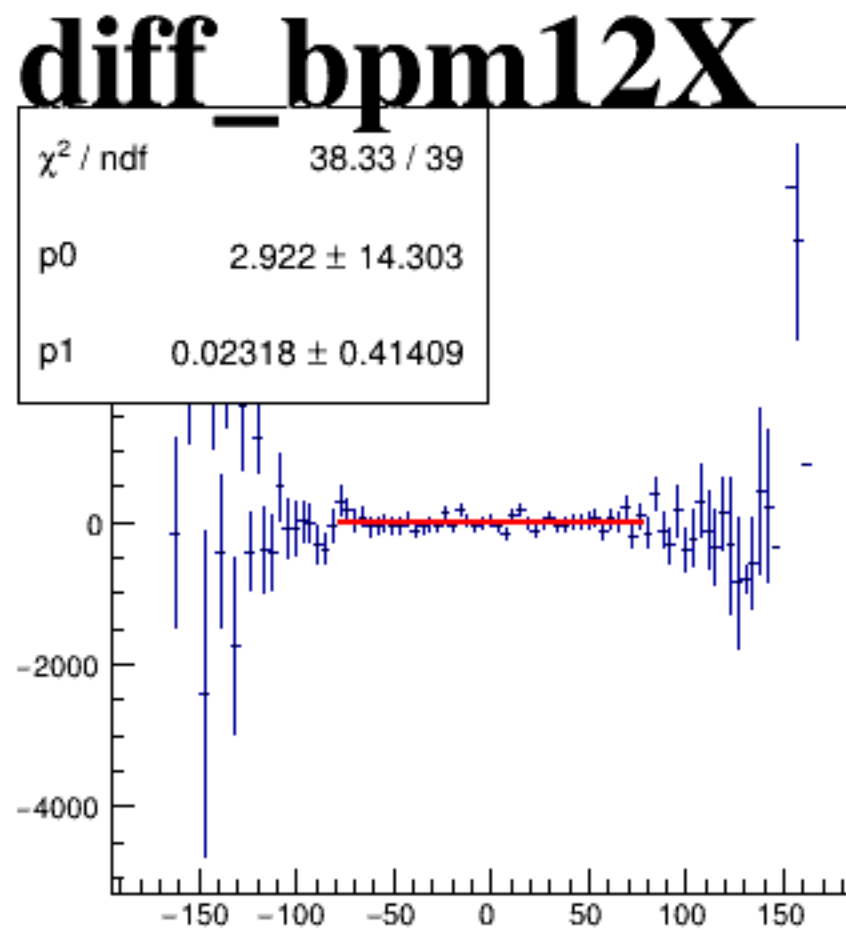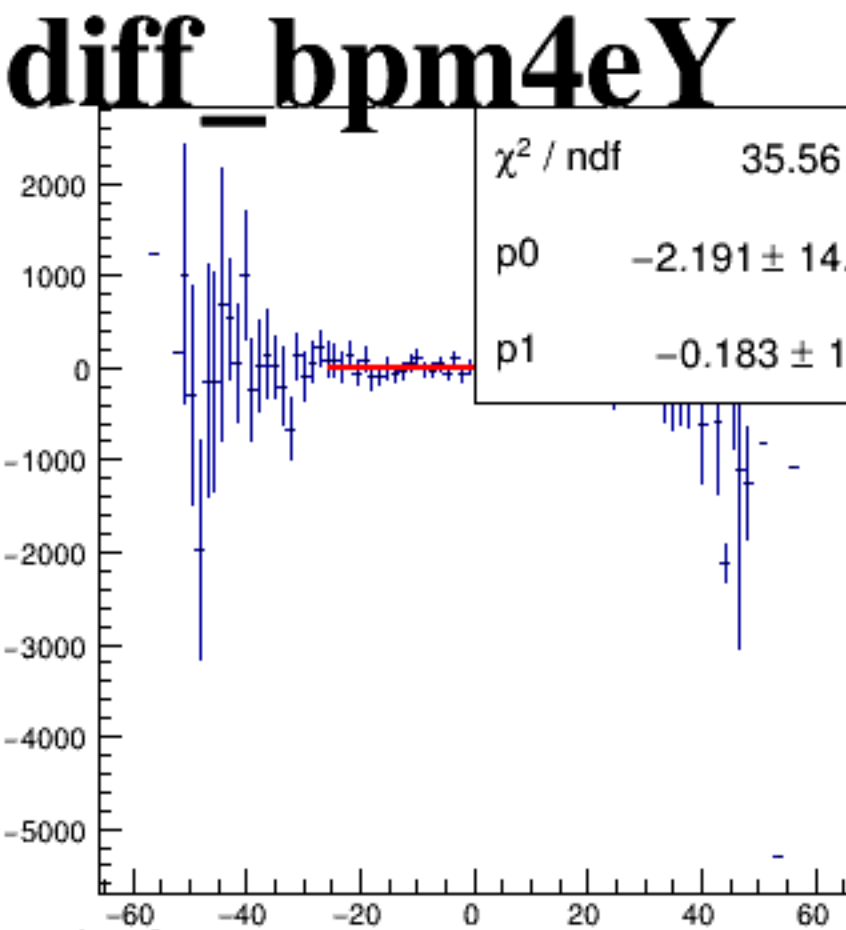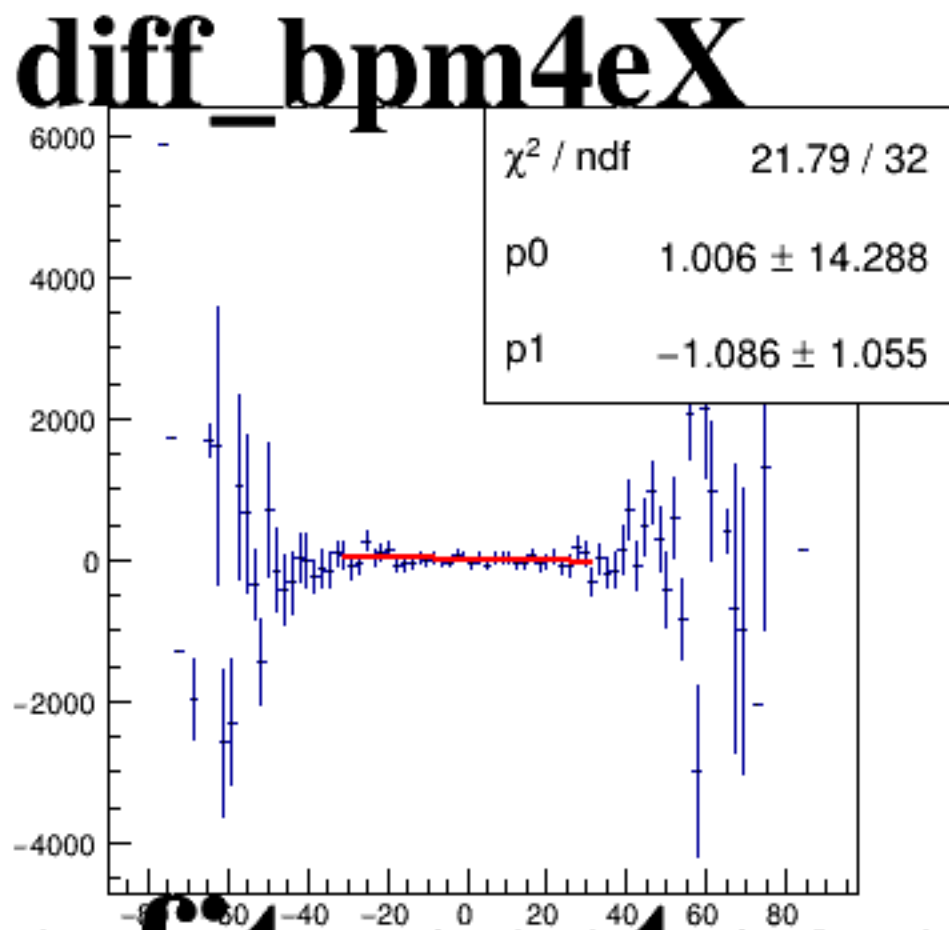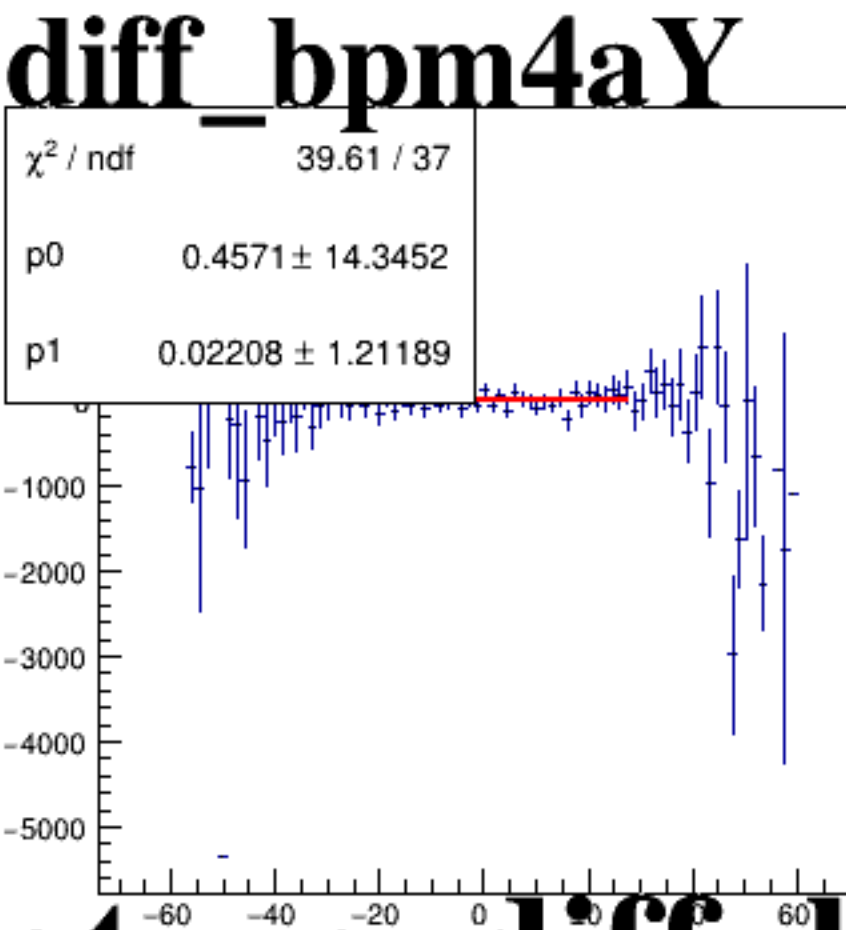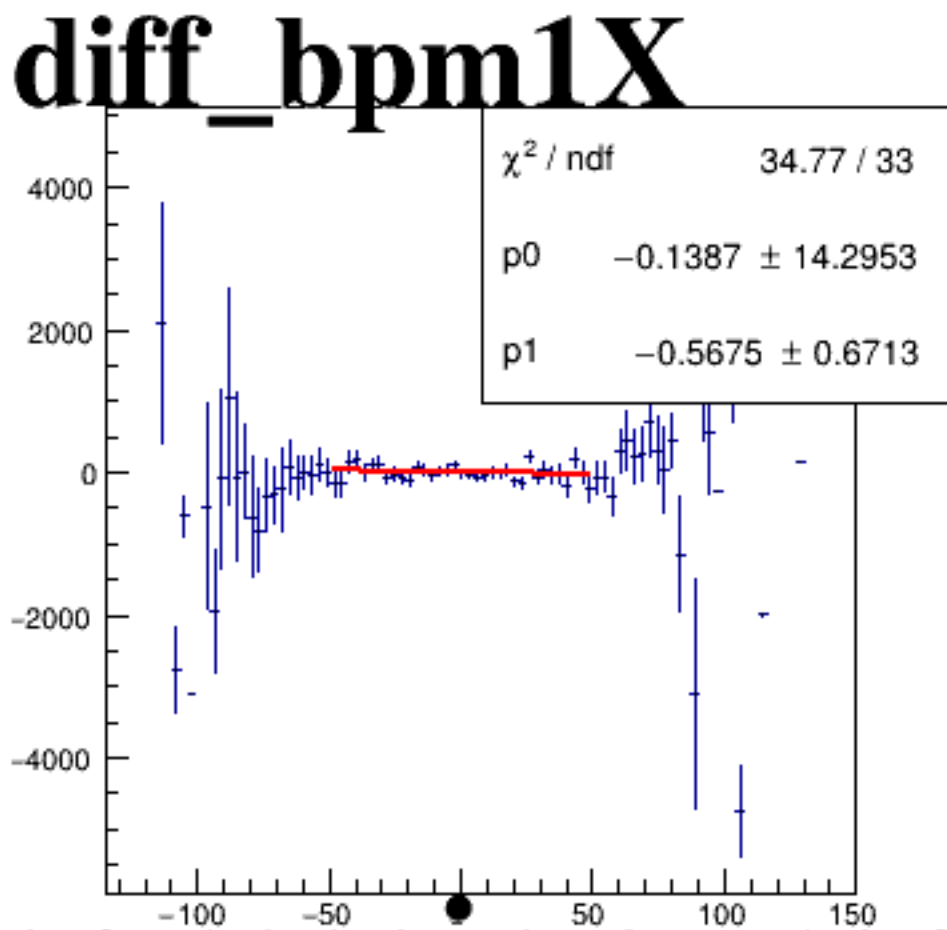






asym_atl1

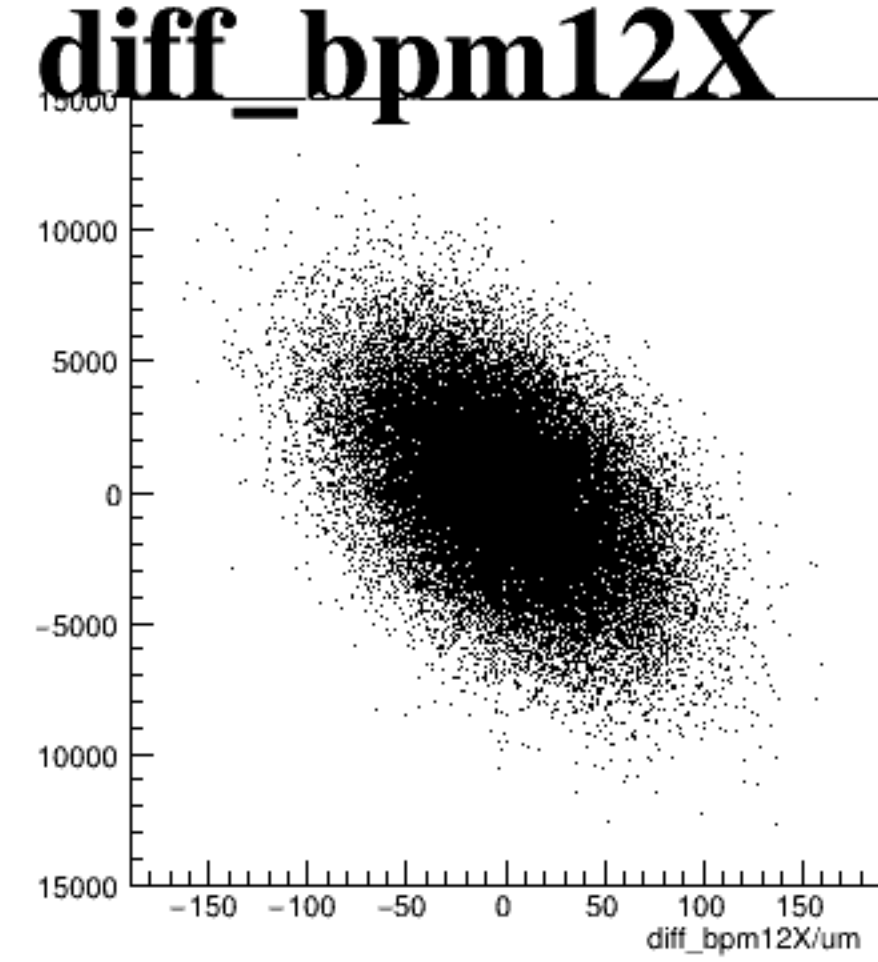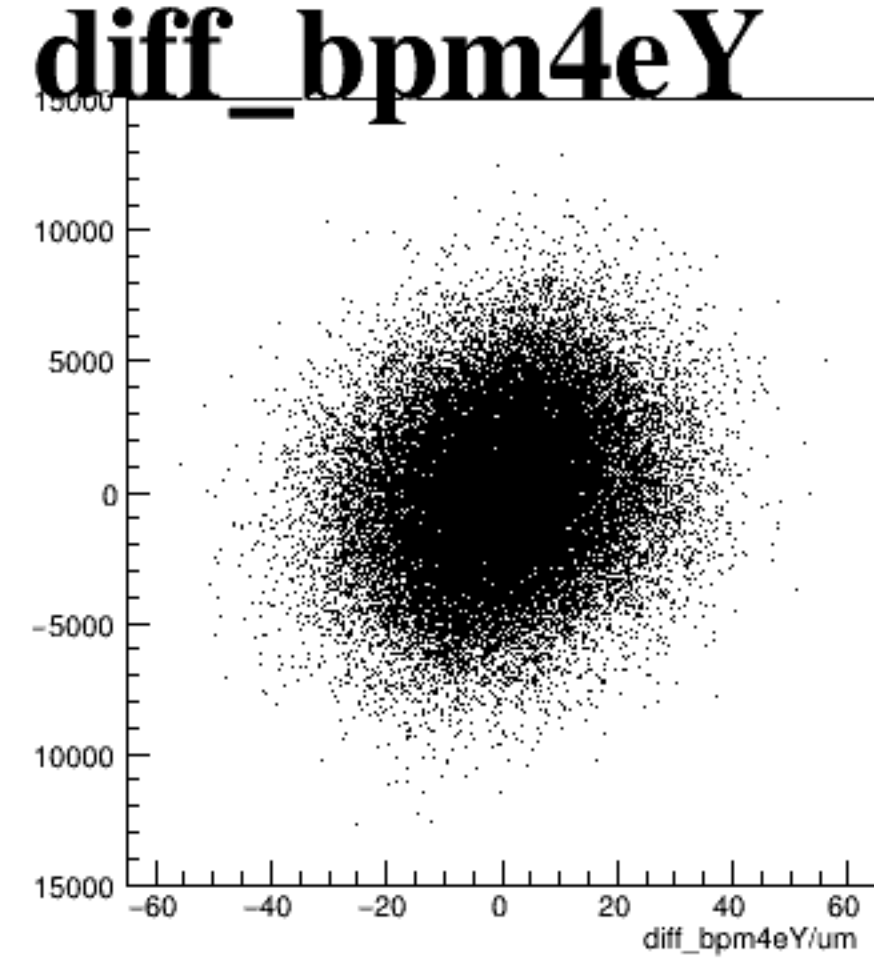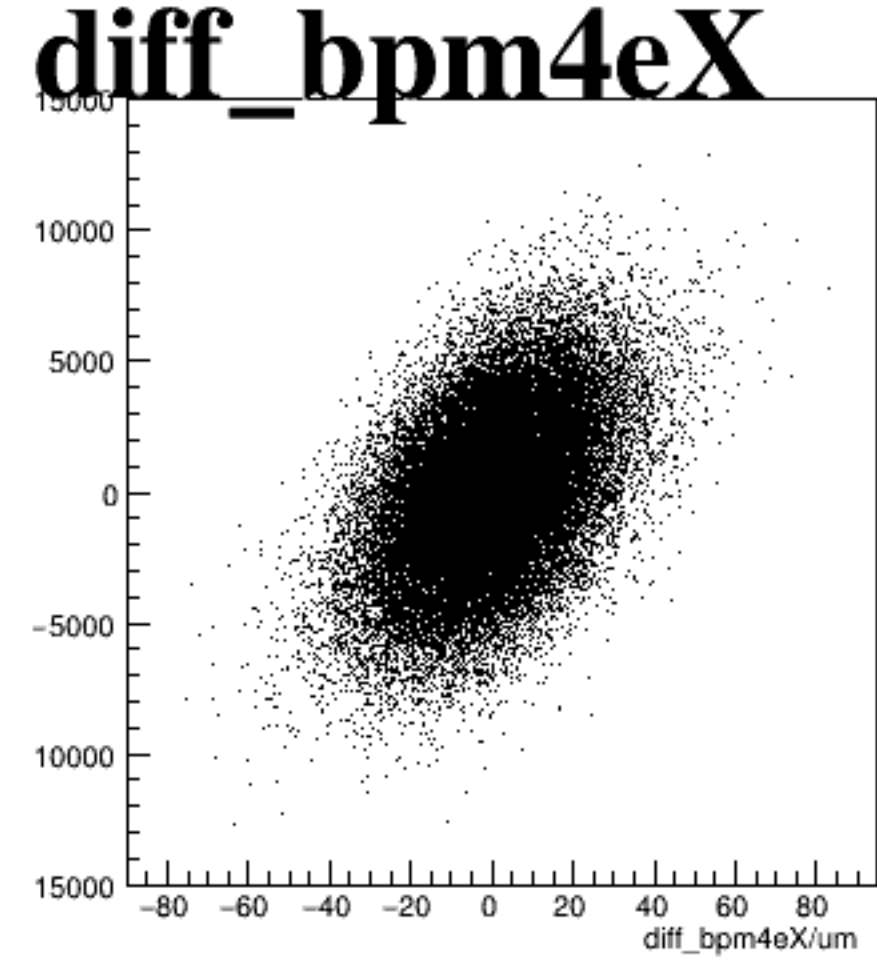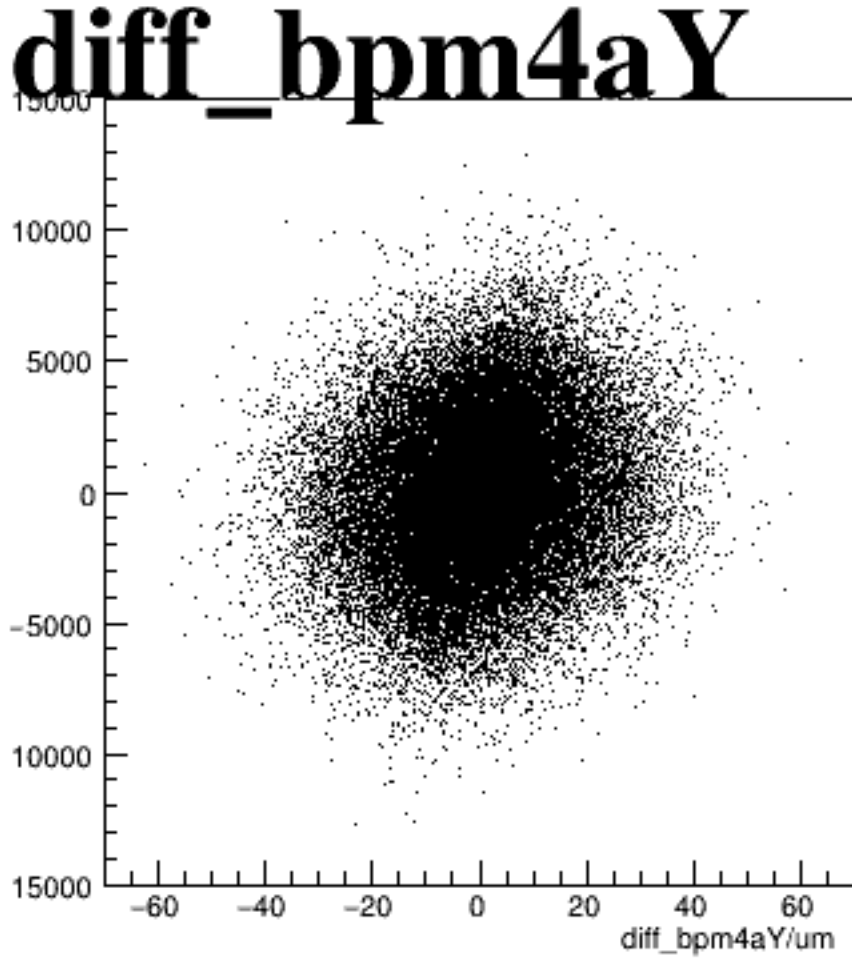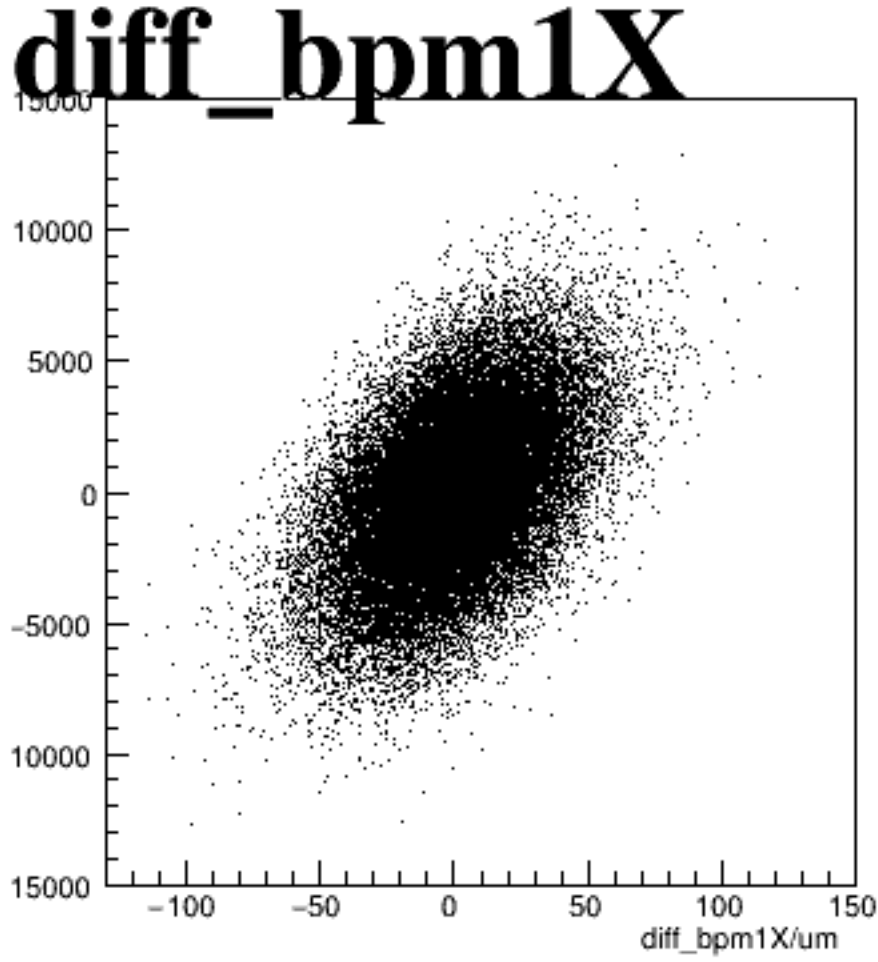






asym_atr1

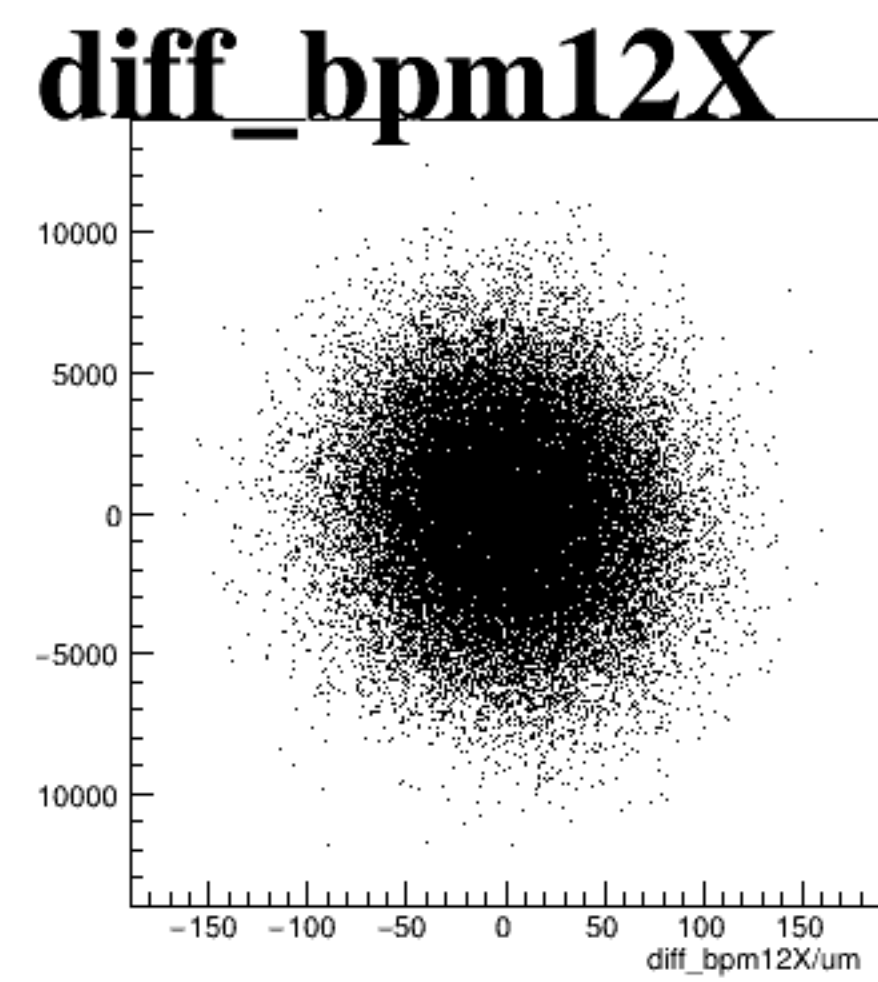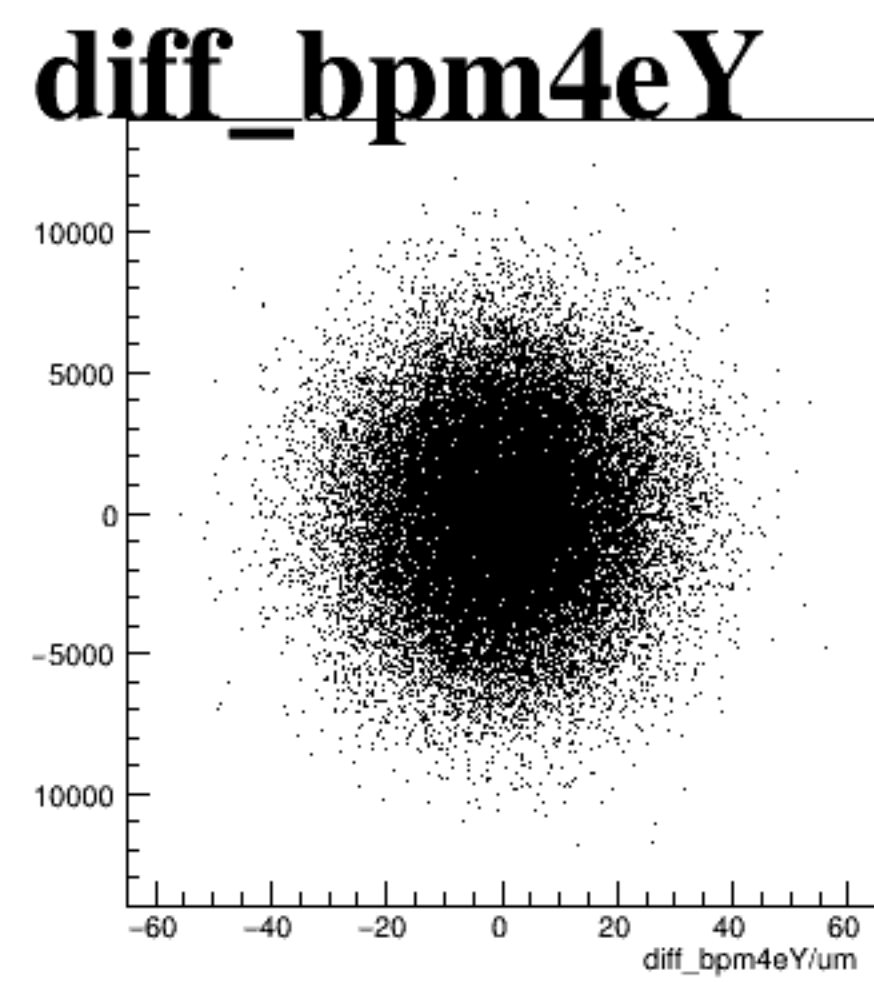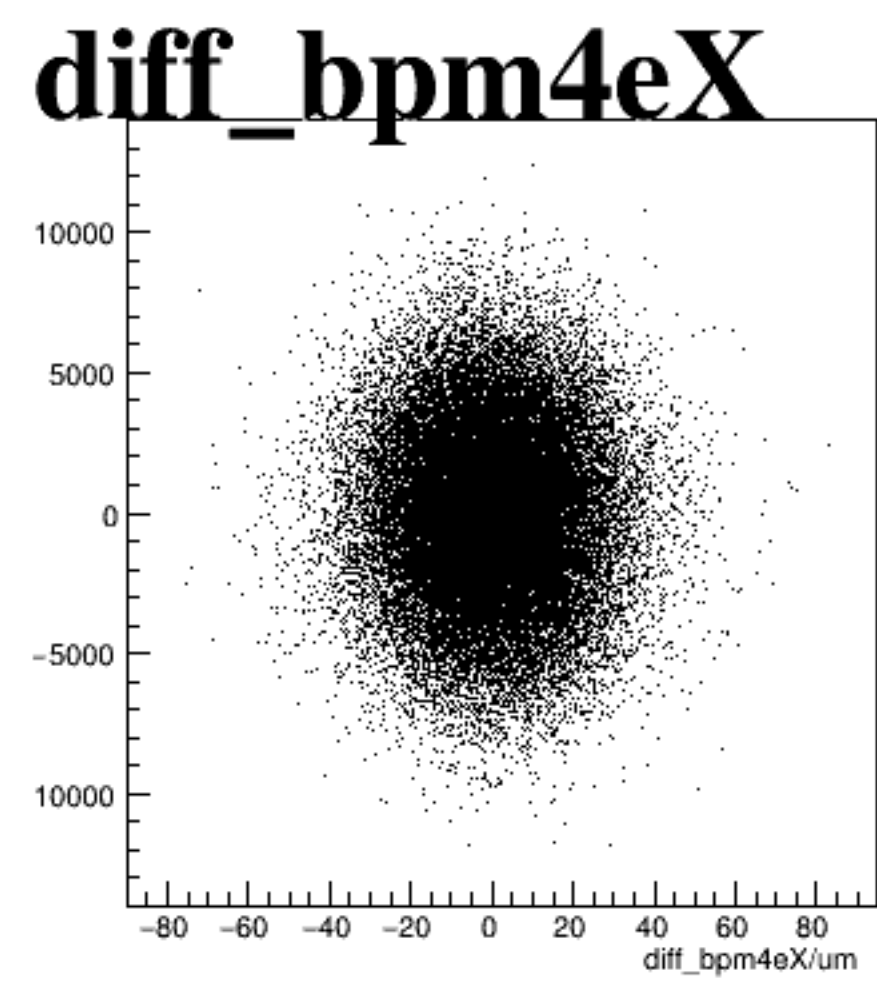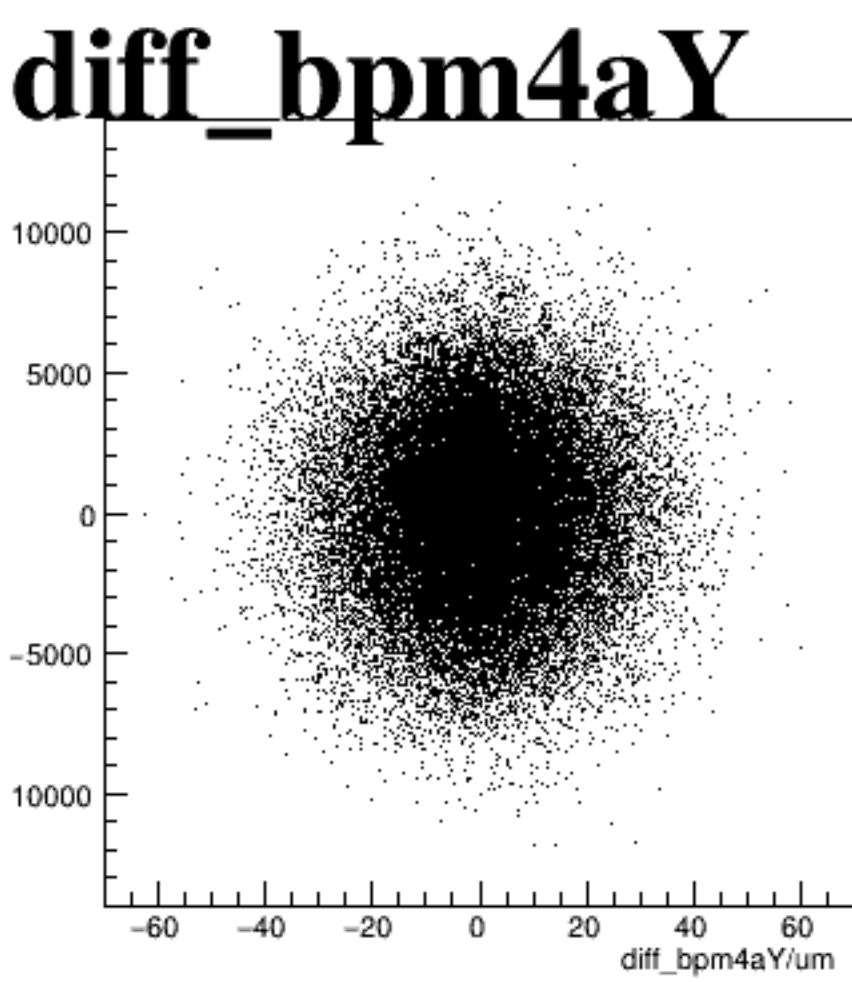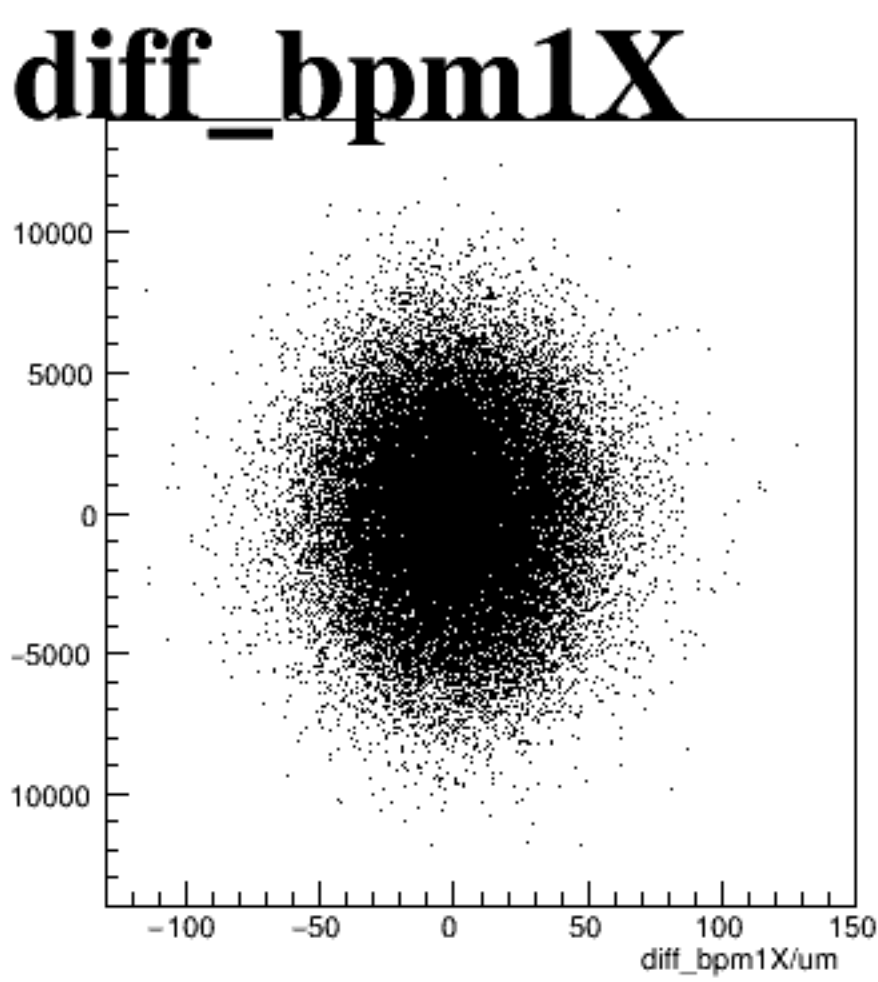

asym_atl2

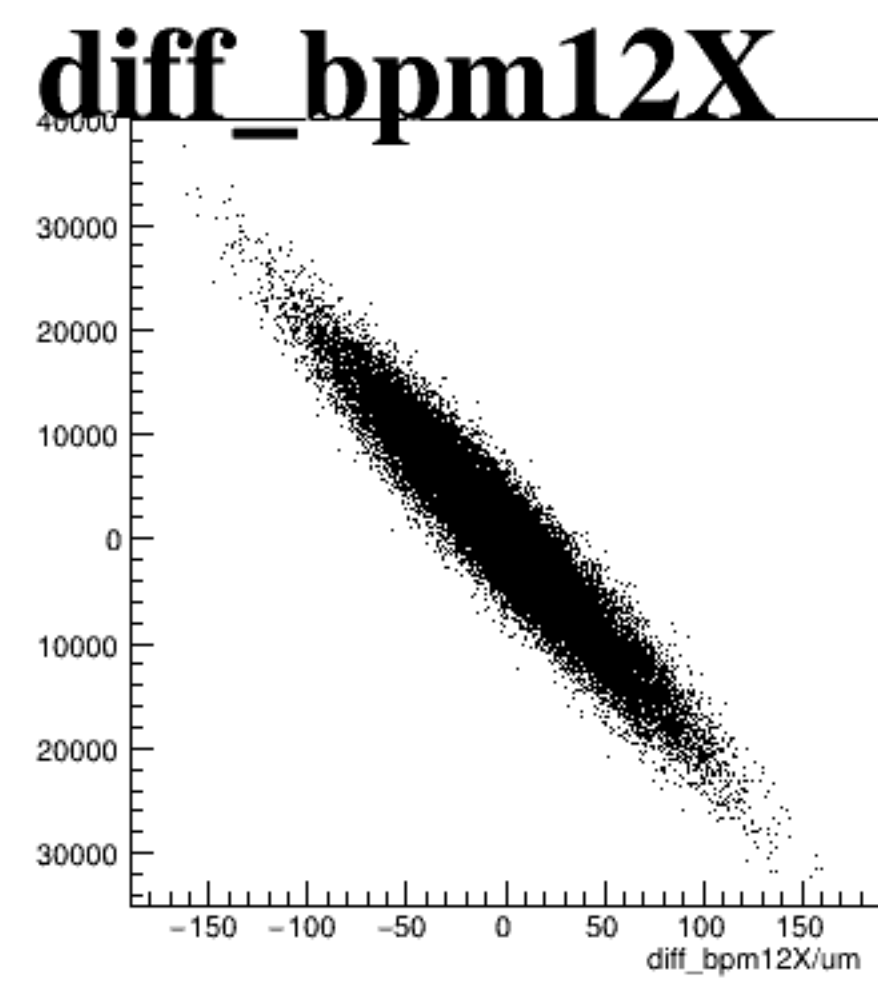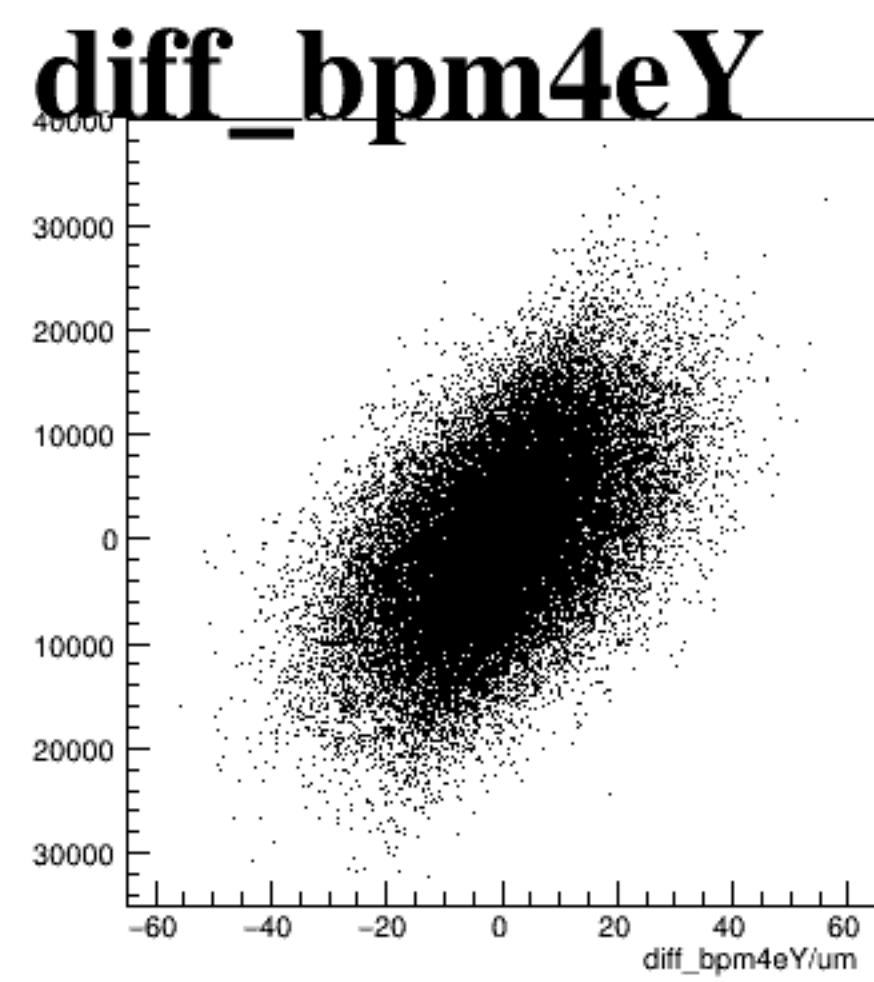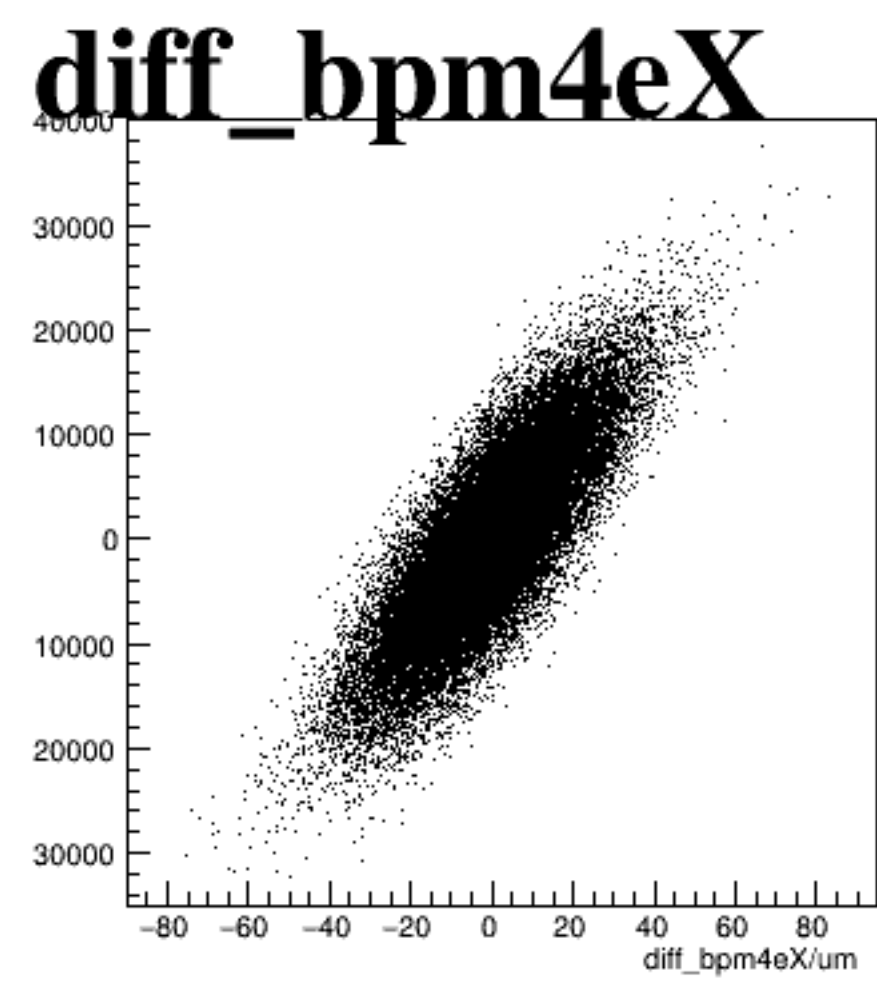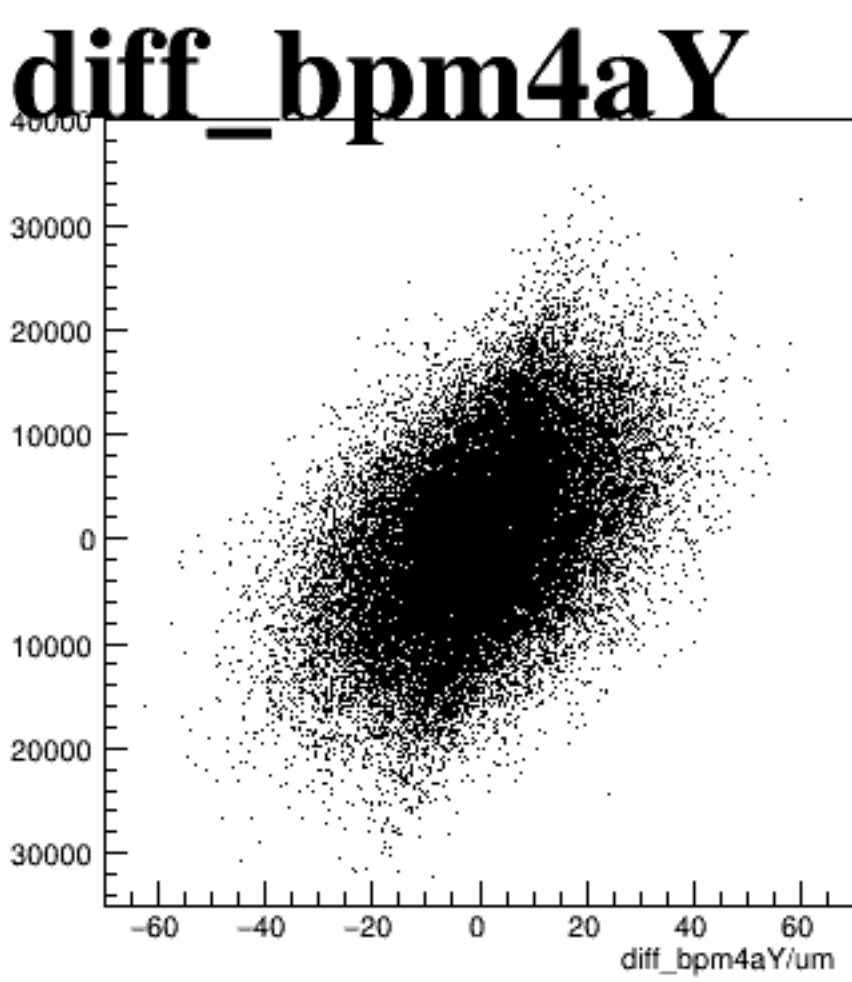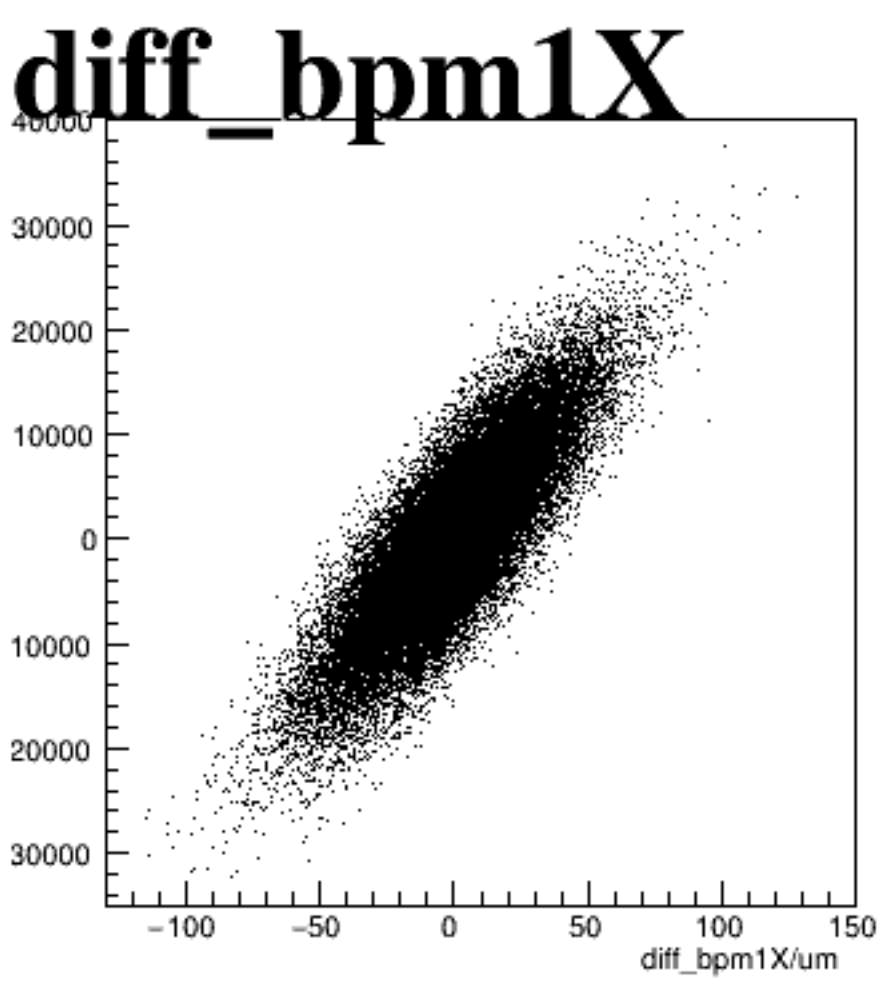

asym_atr2

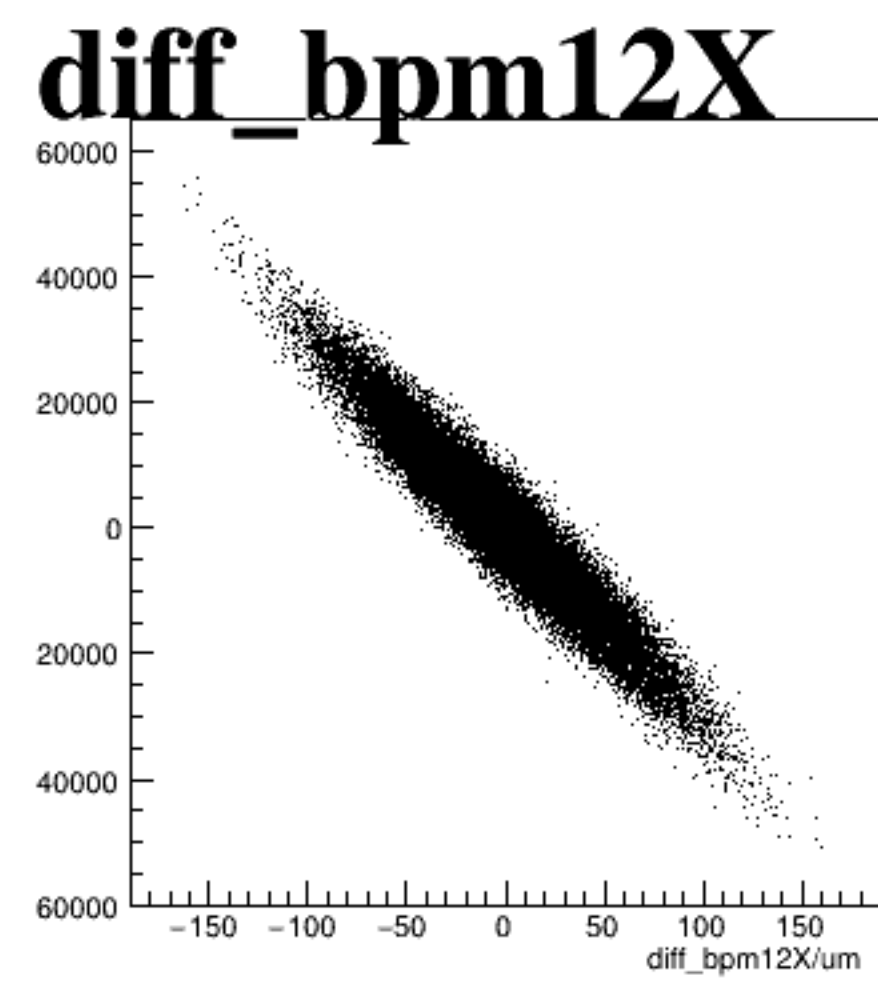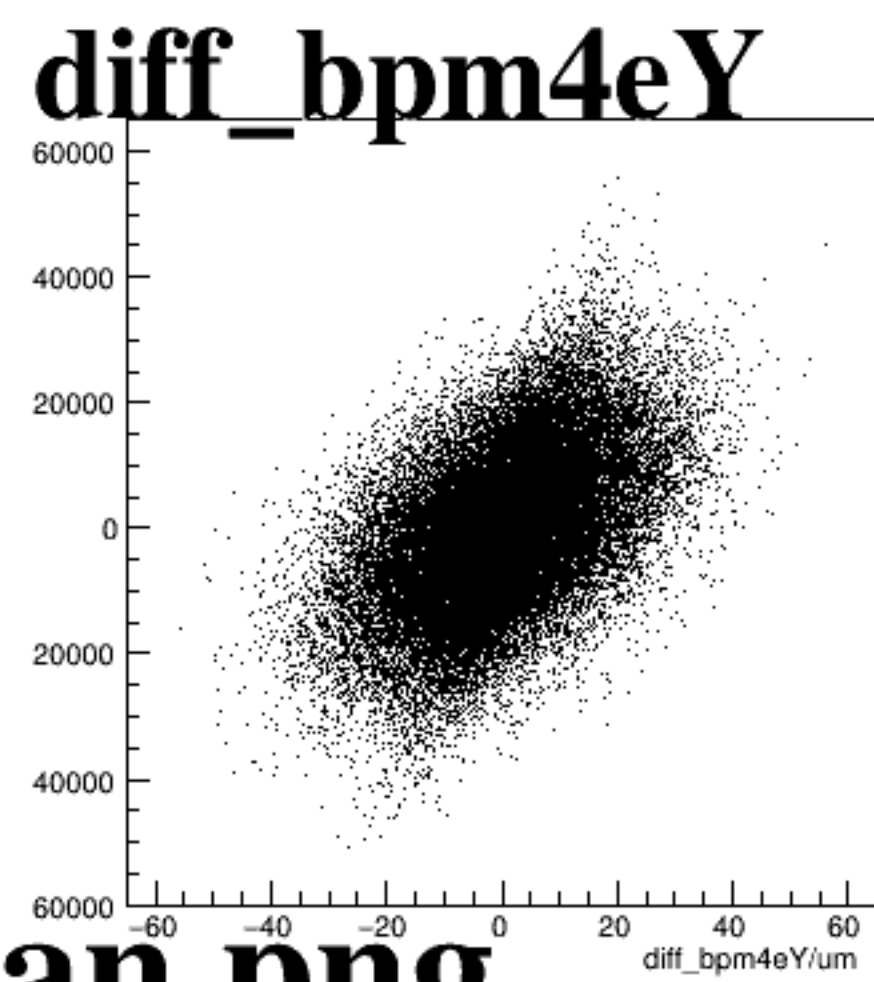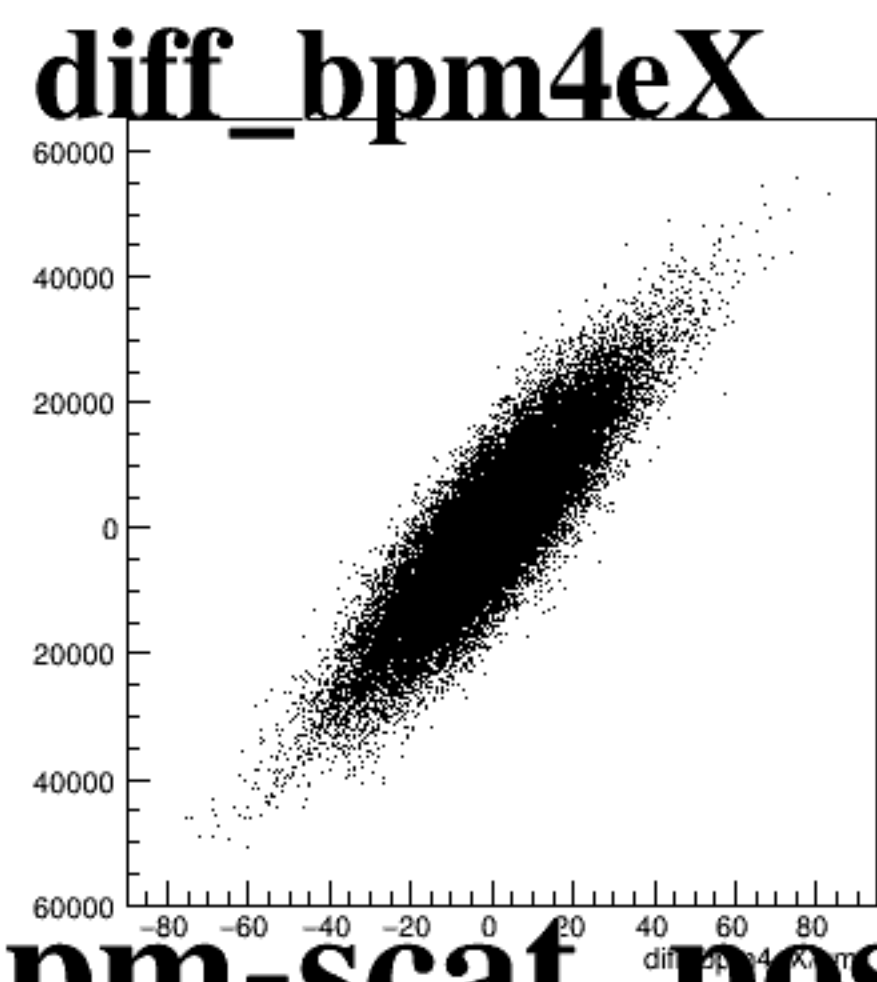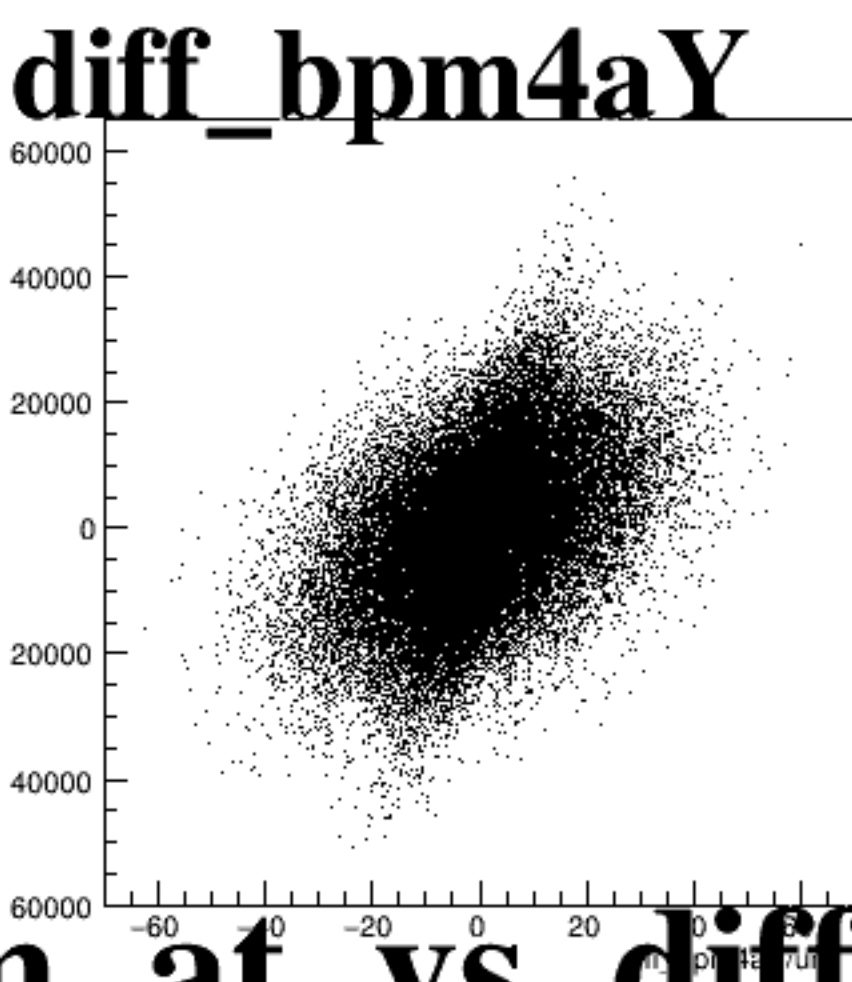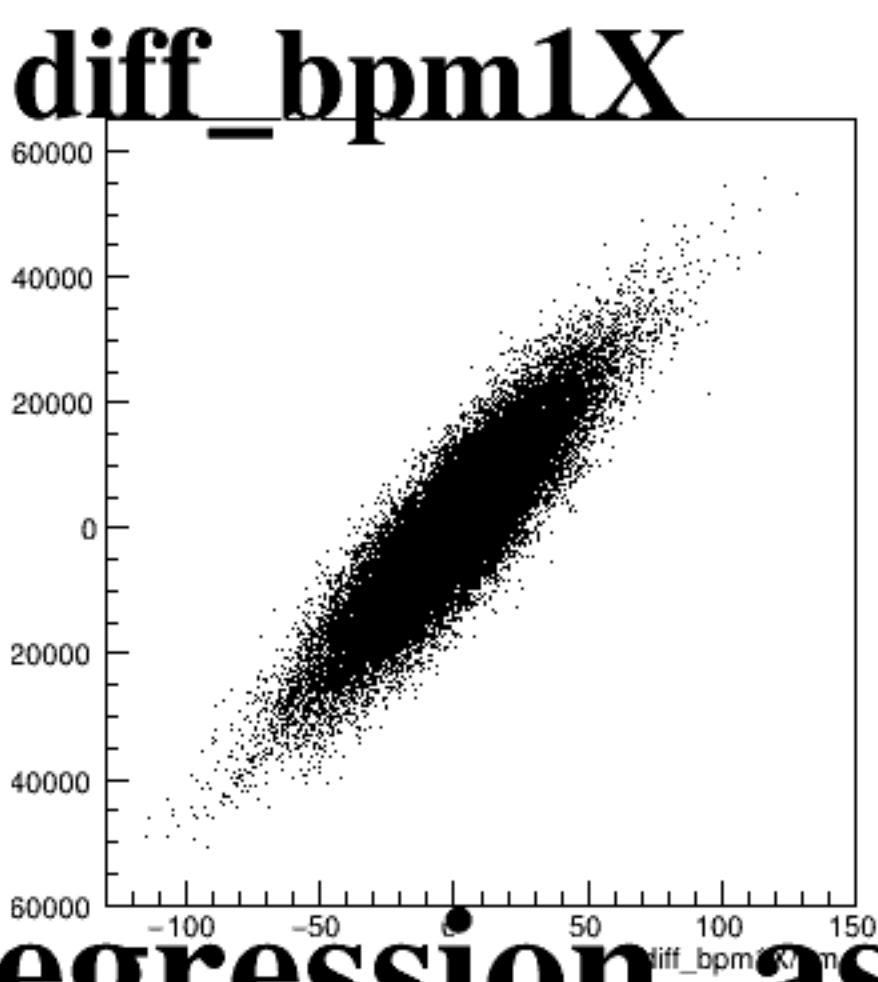

The figure displays five scatter plots, each representing the distribution of differences in beam parameters for a specific beam type. The plots are arranged horizontally. Each plot has a title and axes labeled with parameter differences in micrometers (μm). The distributions are roughly circular and centered at the origin.

- diff_bpm1X**: The x-axis ranges from -100 to 150 μm , and the y-axis ranges from -10000 to 10000 μm .
- diff_bpm4aY**: The x-axis ranges from -60 to 60 μm , and the y-axis ranges from -10000 to 10000 μm .
- diff_bpm4eX**: The x-axis ranges from -80 to 80 μm , and the y-axis ranges from -10000 to 10000 μm .
- diff_bpm4eY**: The x-axis ranges from -60 to 60 μm , and the y-axis ranges from -10000 to 10000 μm .
- diff_bpm12X**: The x-axis ranges from -150 to 150 μm , and the y-axis ranges from -10000 to 10000 μm .