




asym_atl1

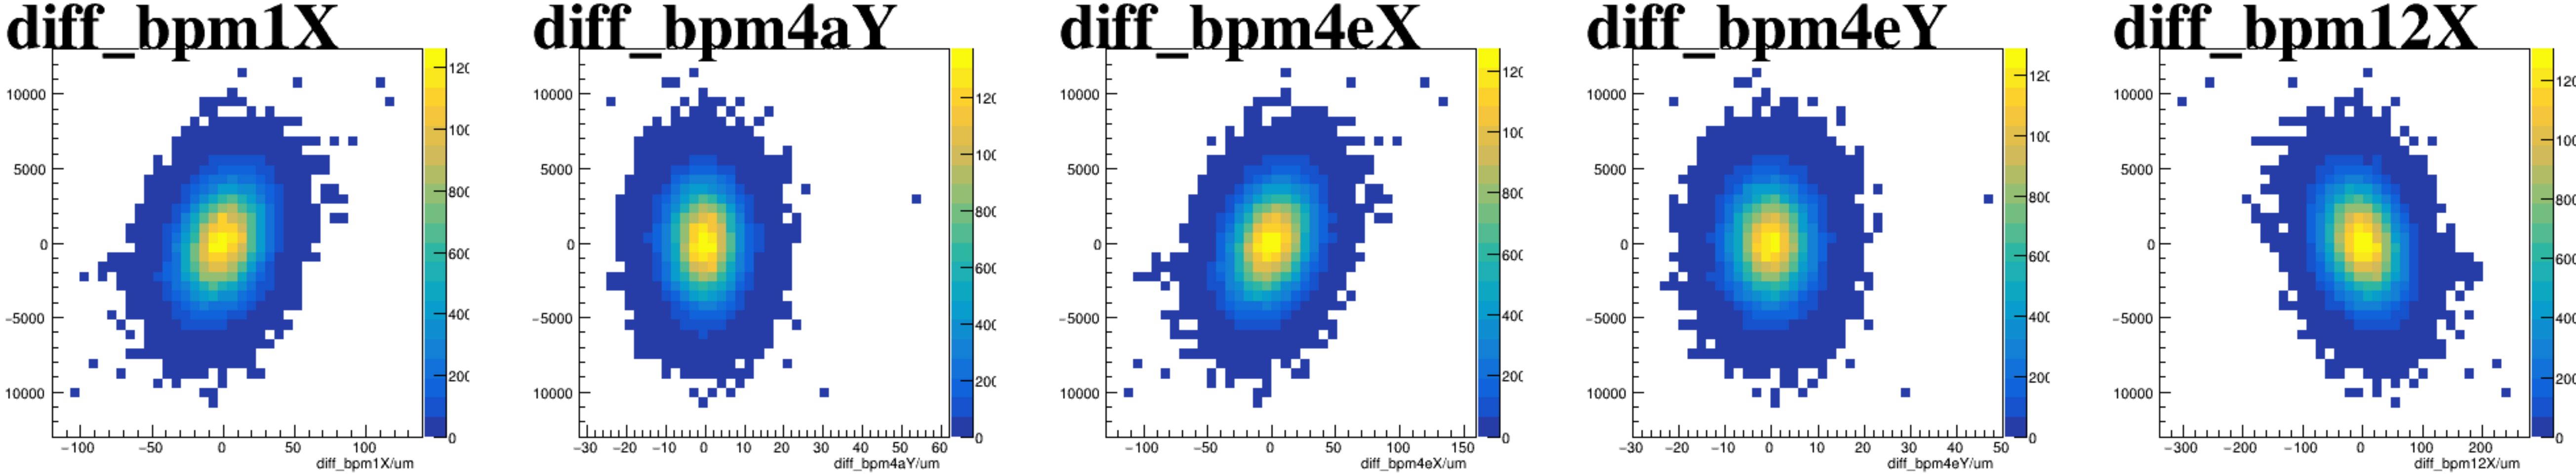


asym_atr1

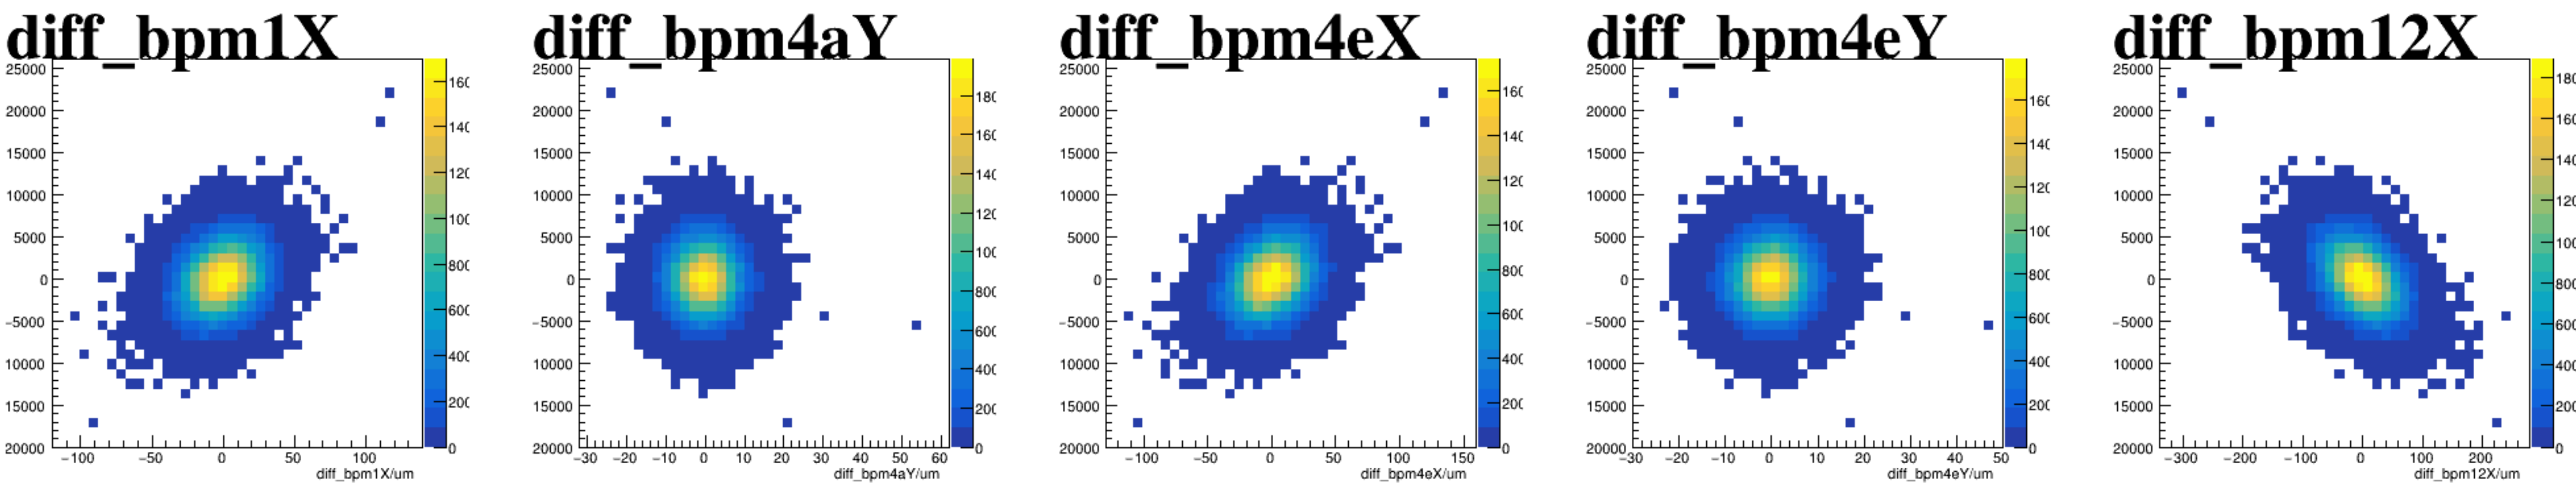


asym_atl2

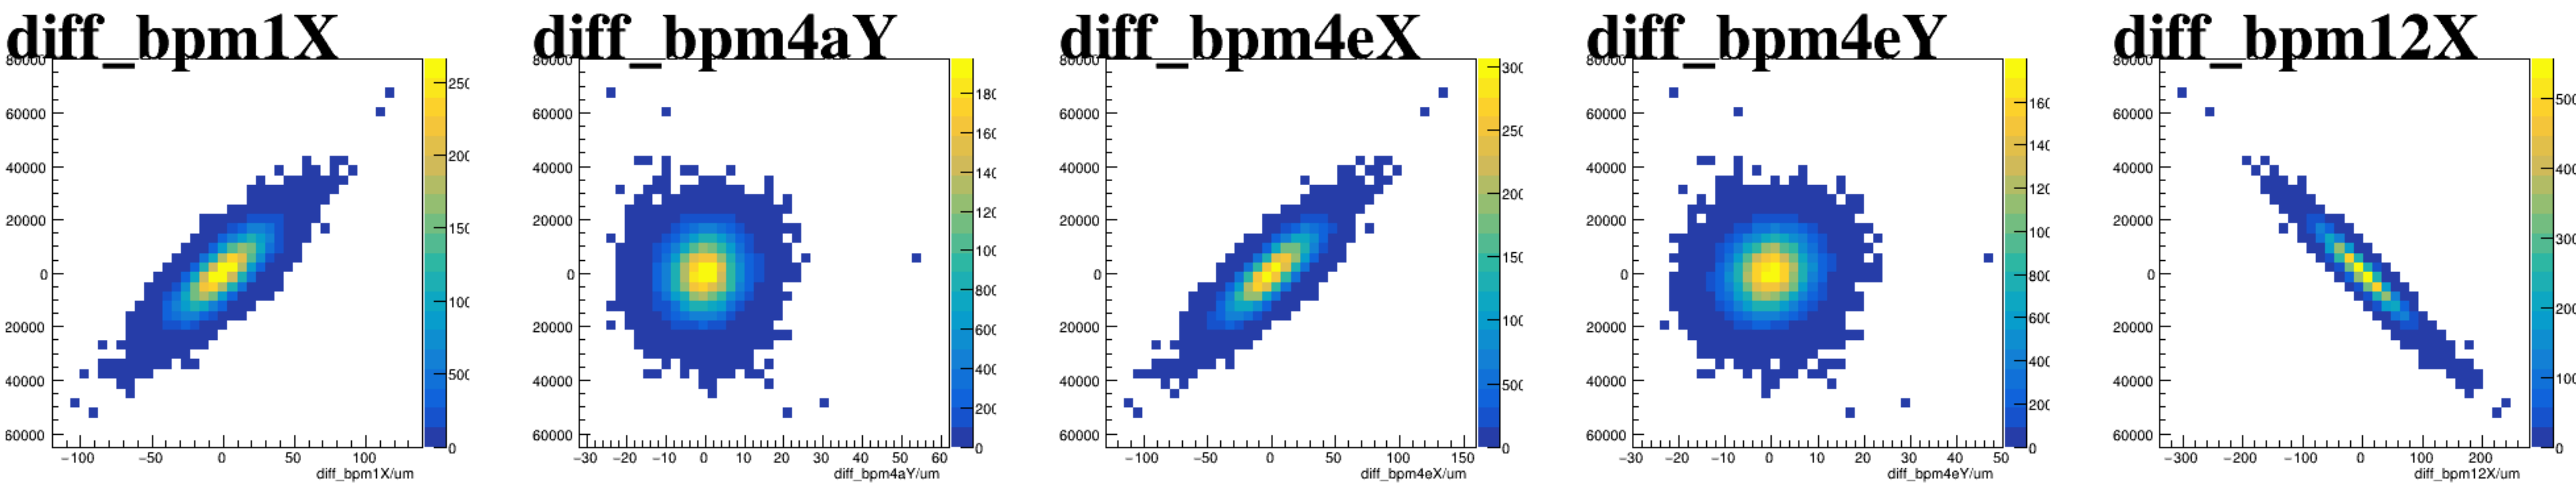


asym_atr2

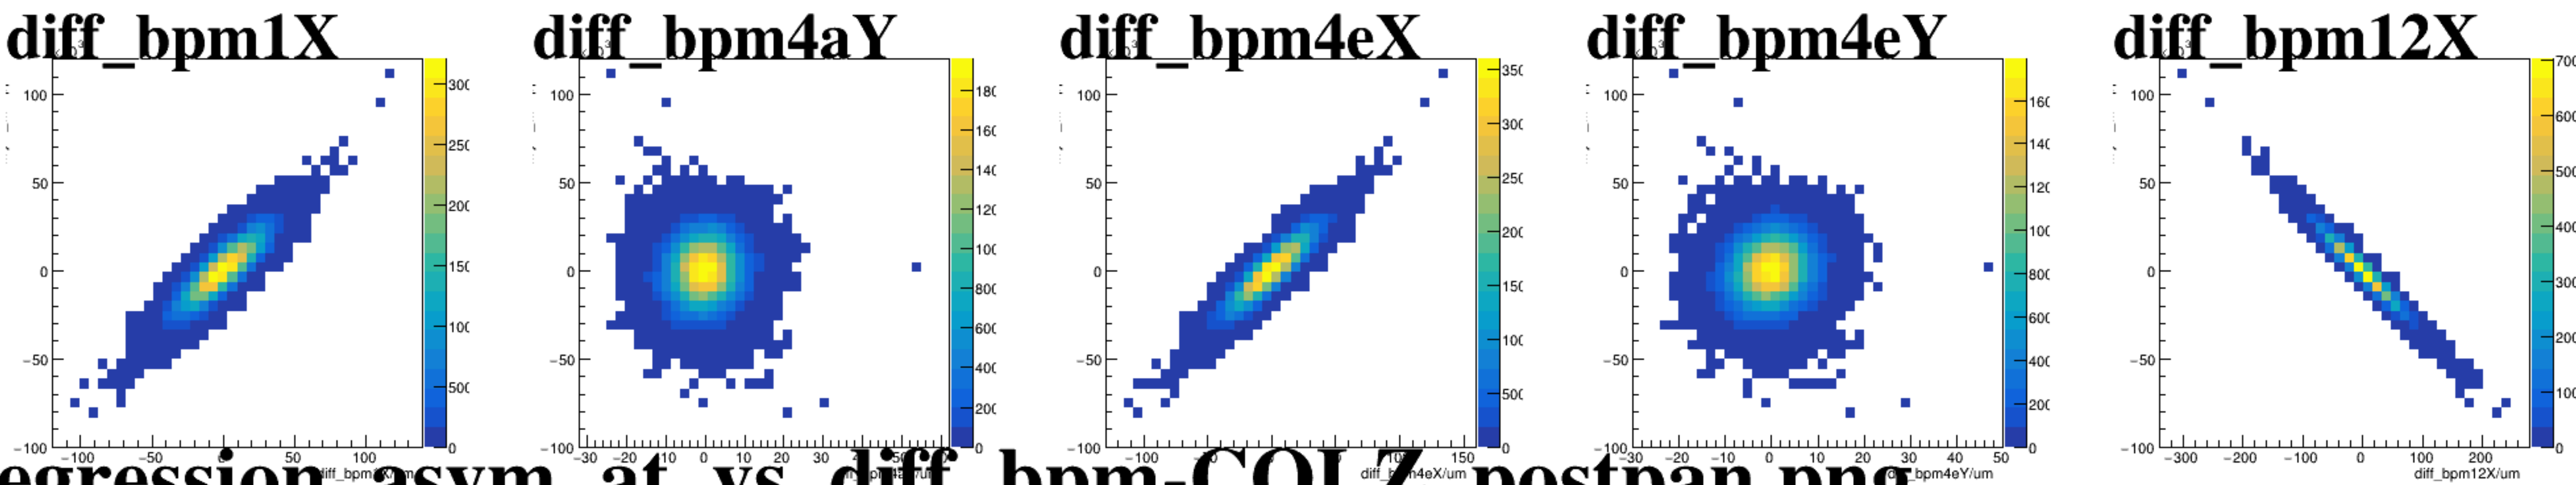


reg_asym_atl1

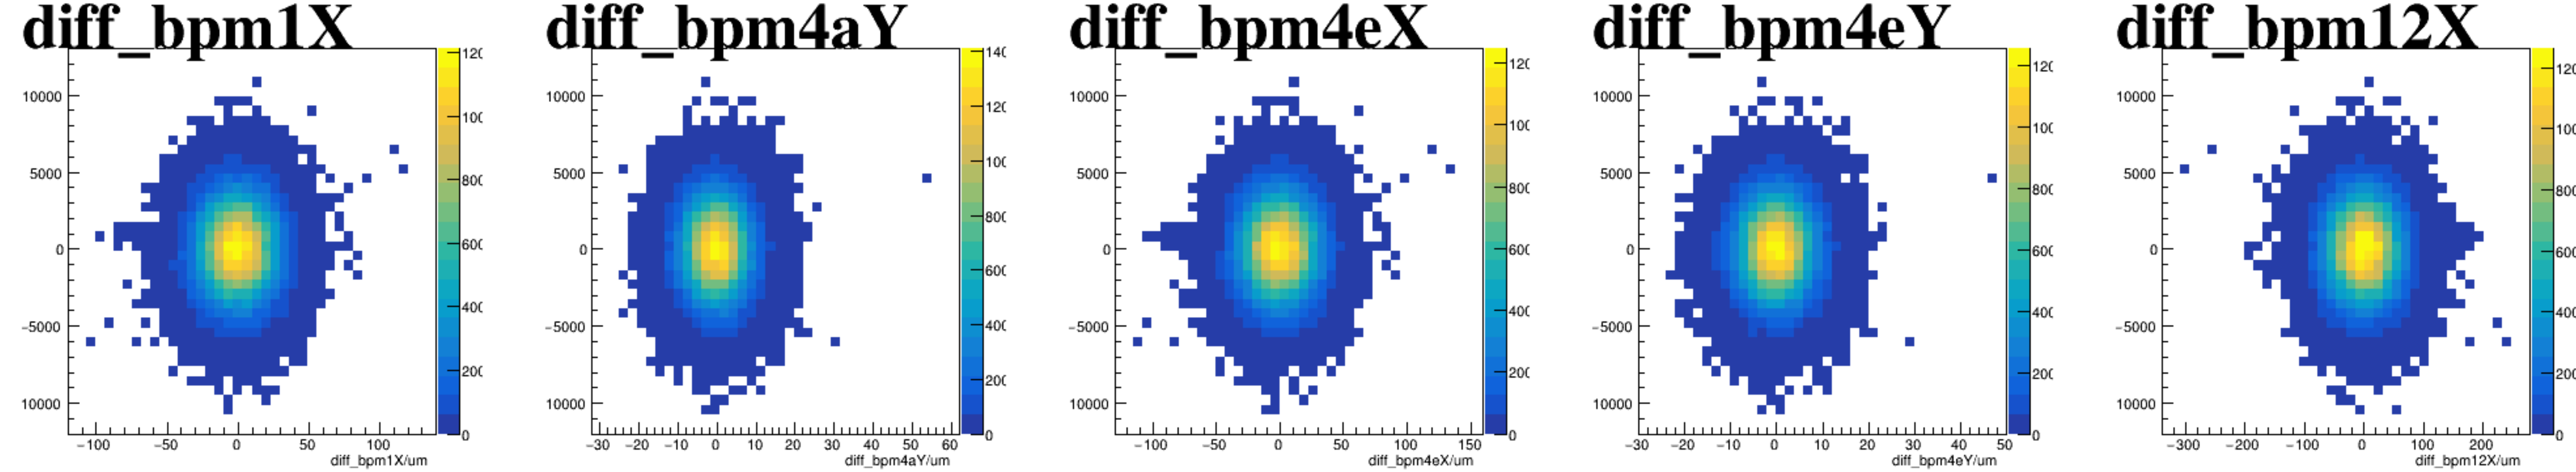


reg_asym_atr1

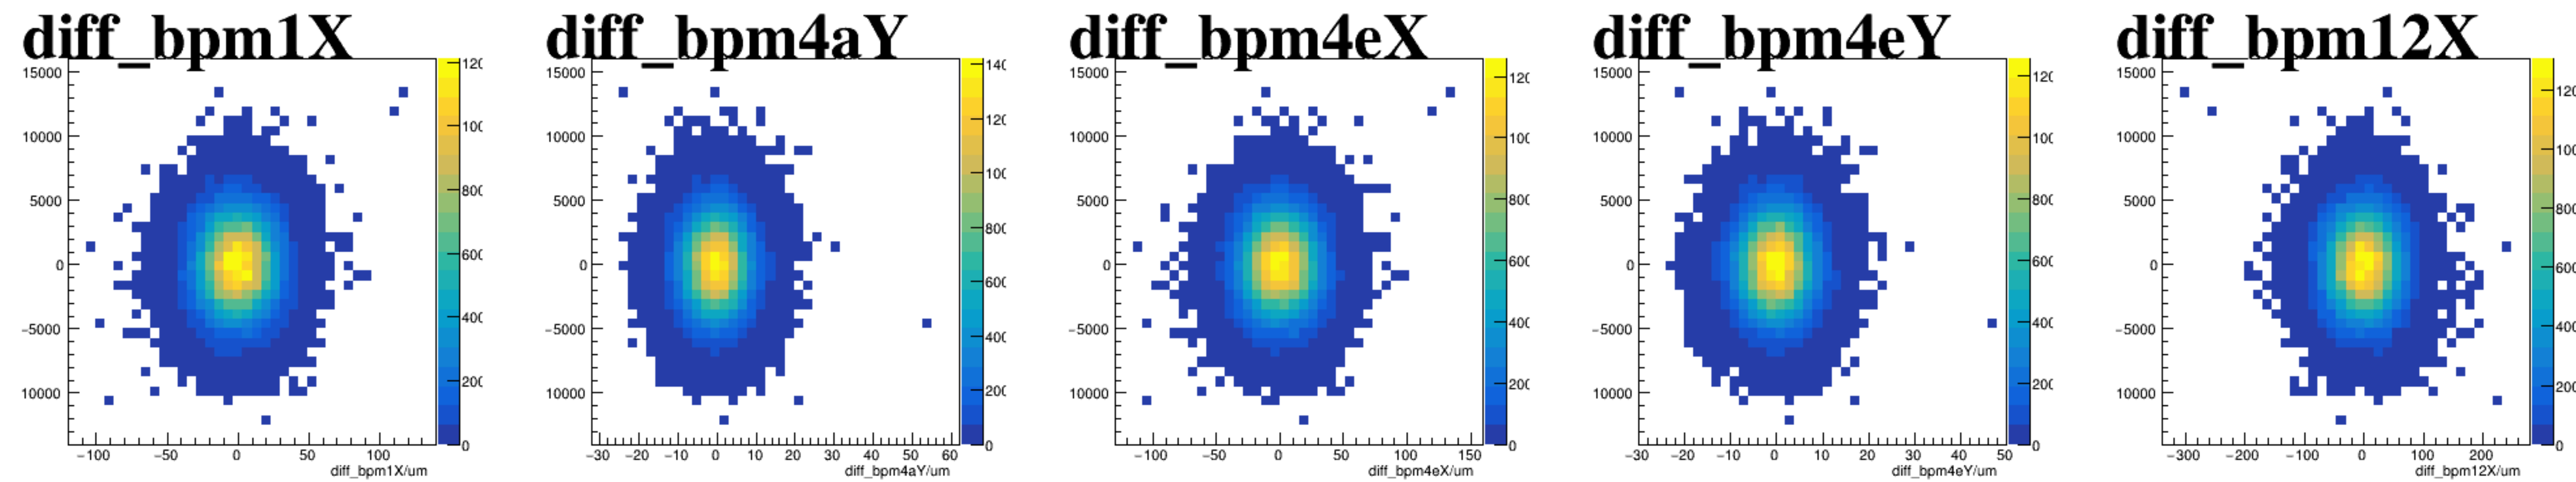






reg_asym_atl2

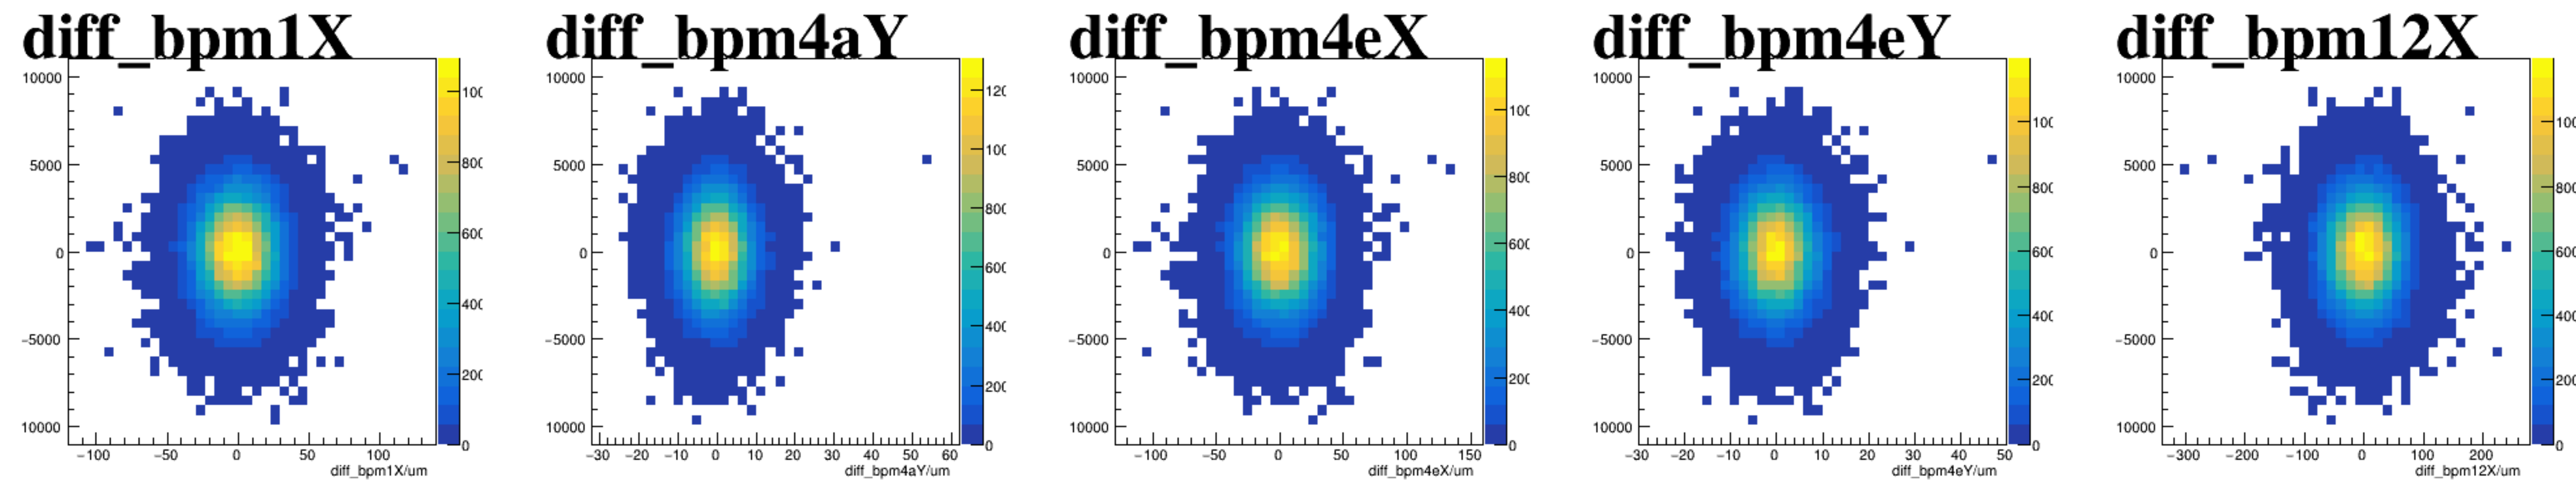






reg_asym_atr2

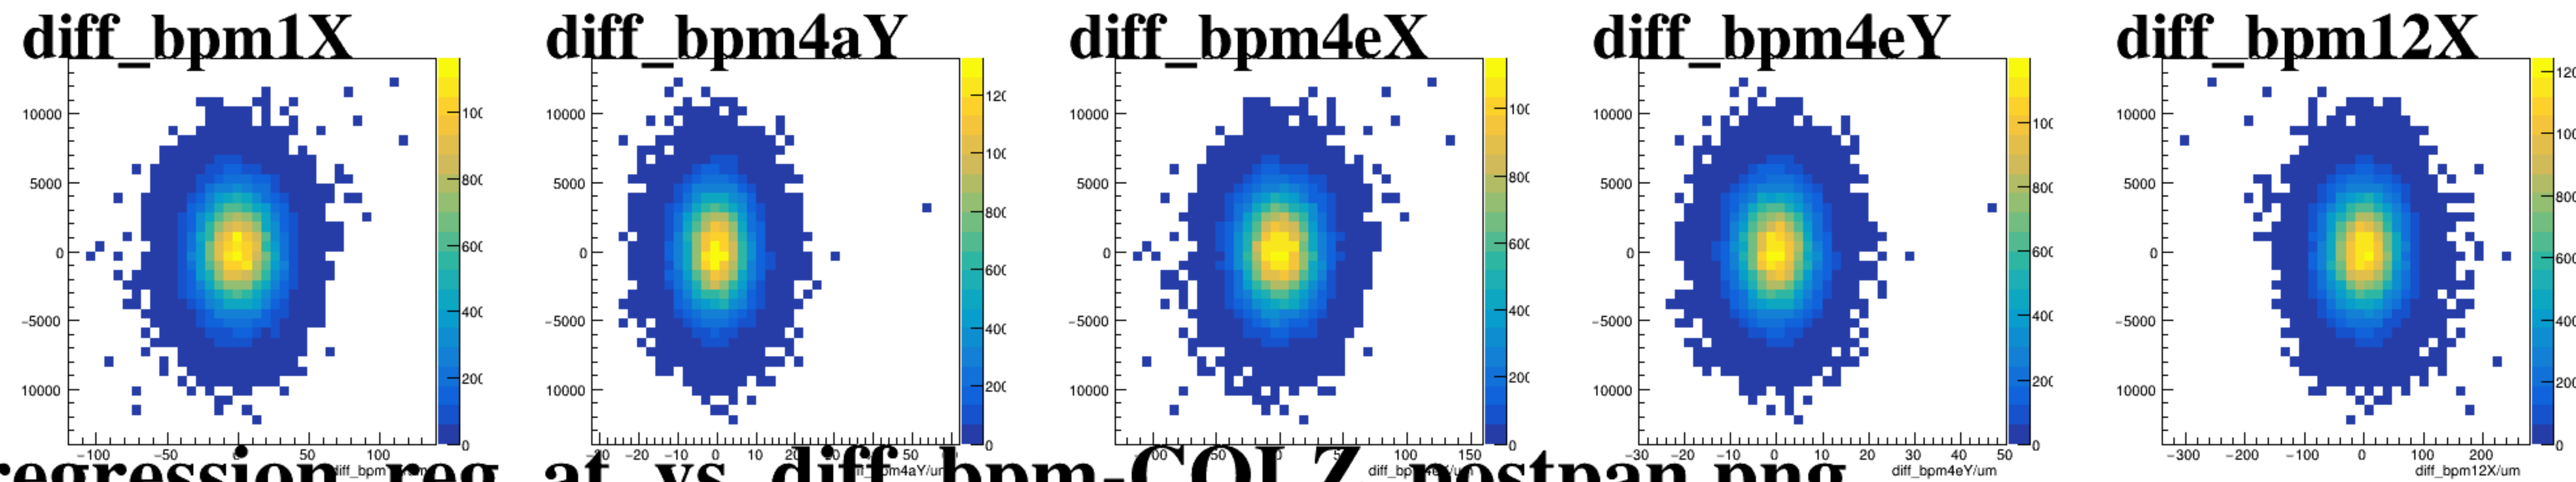






asym_atl1

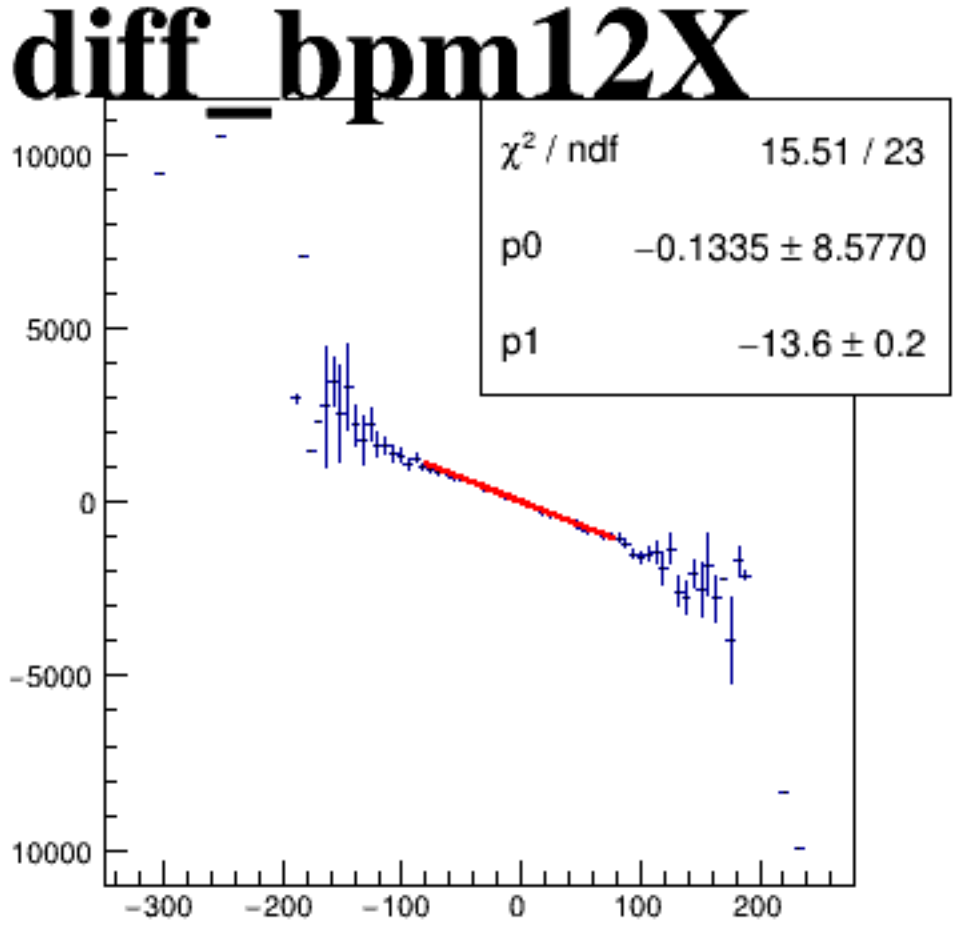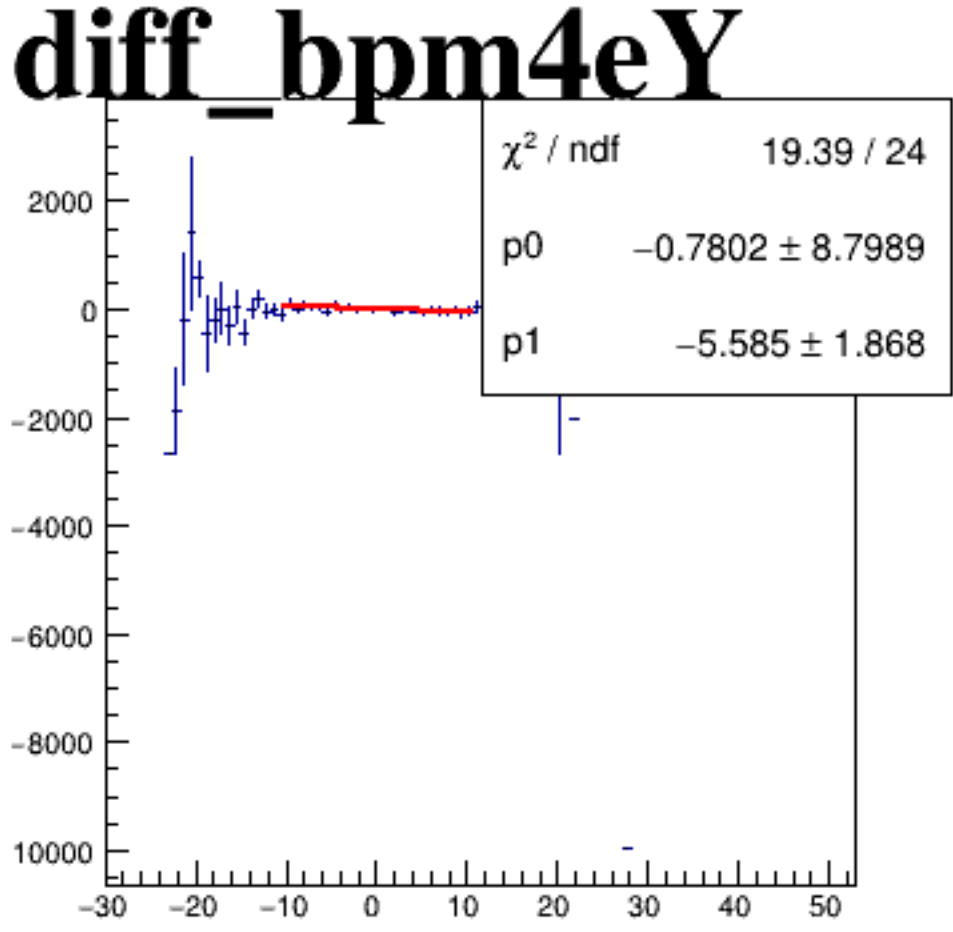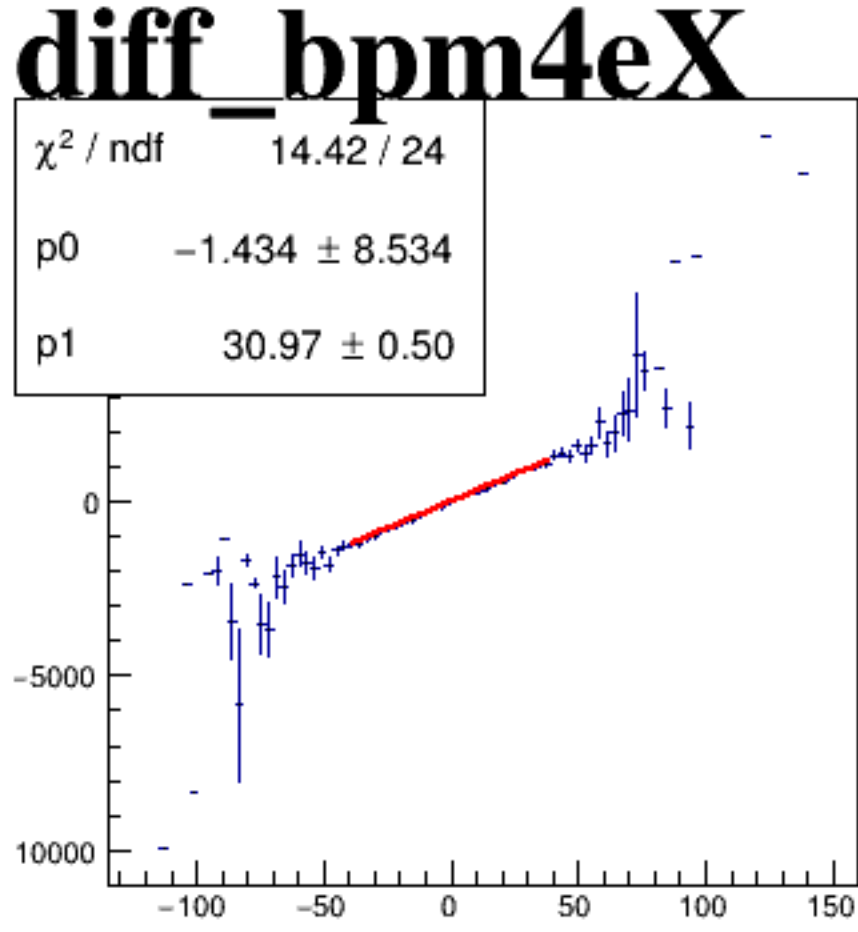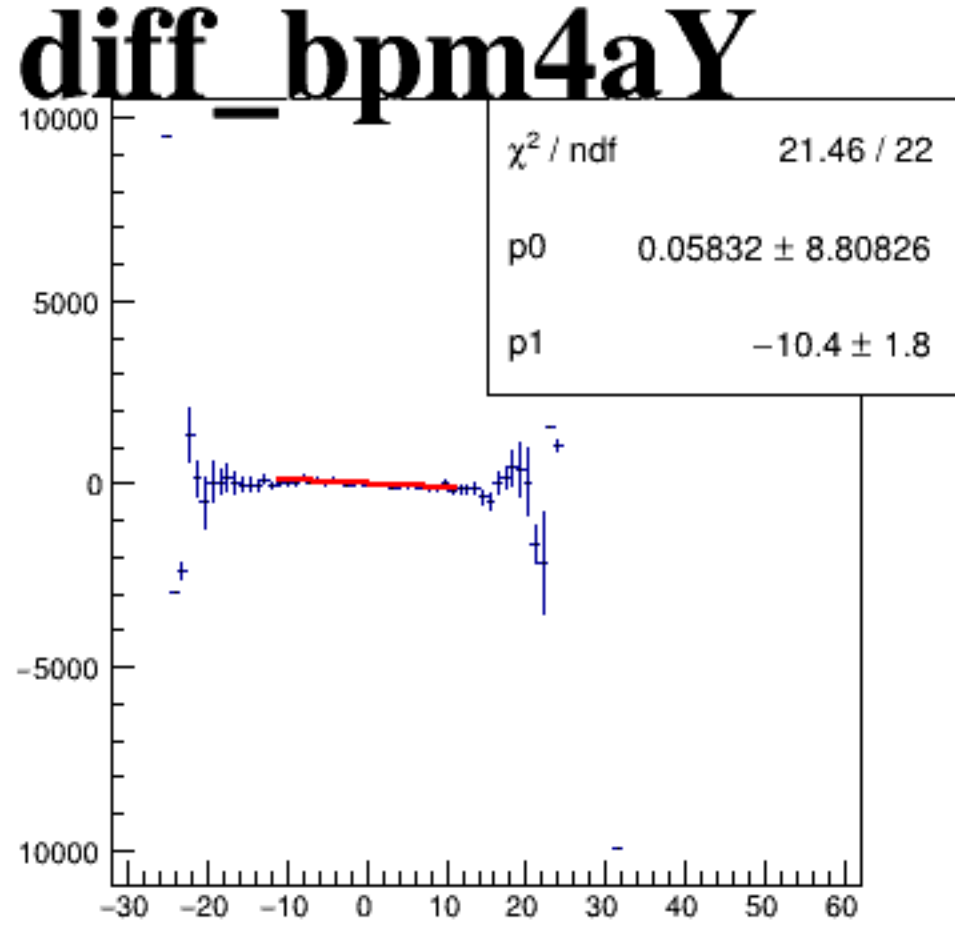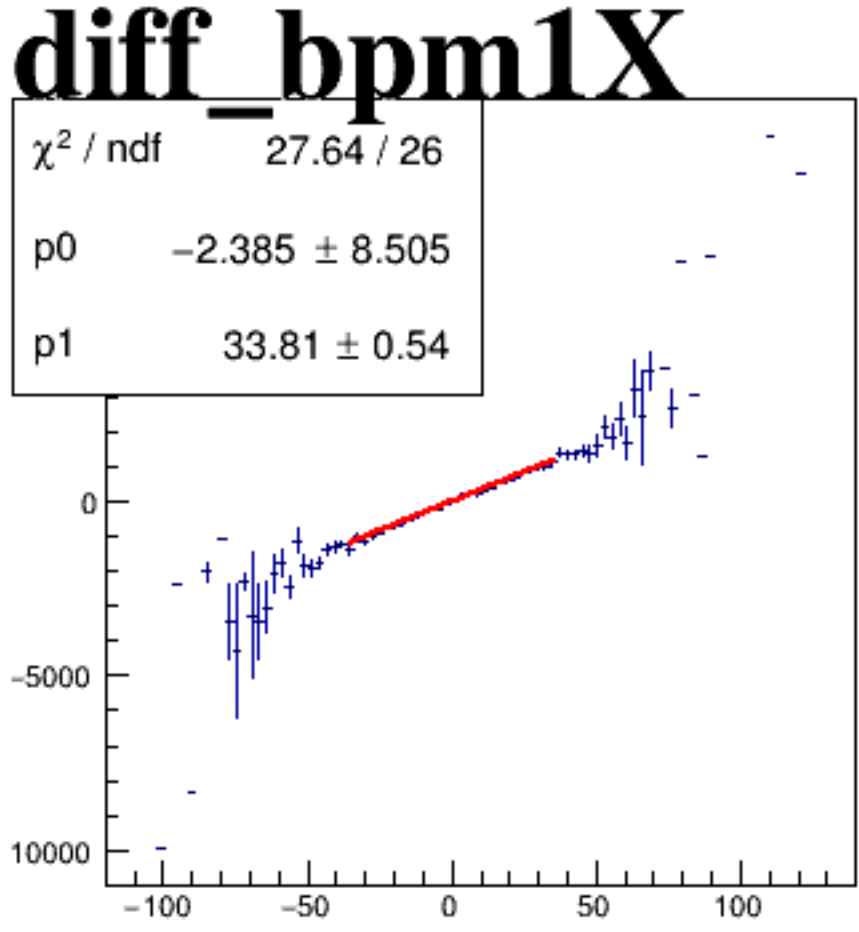






asym_atr1

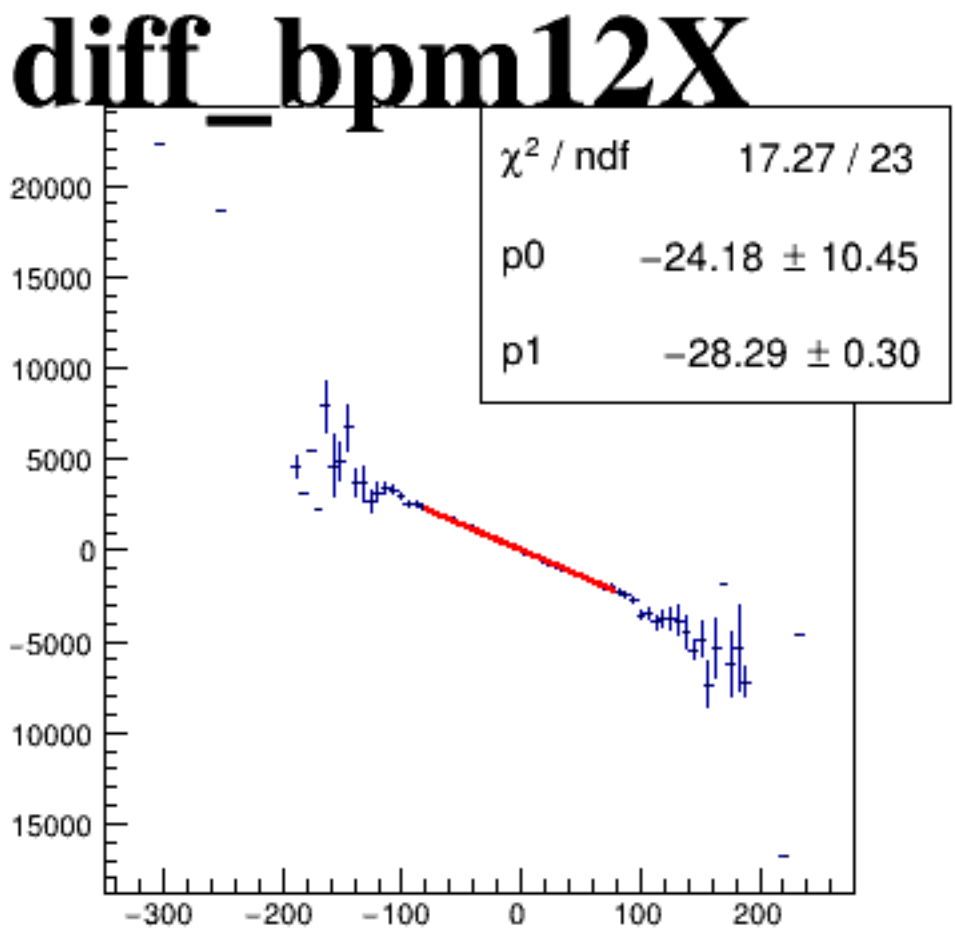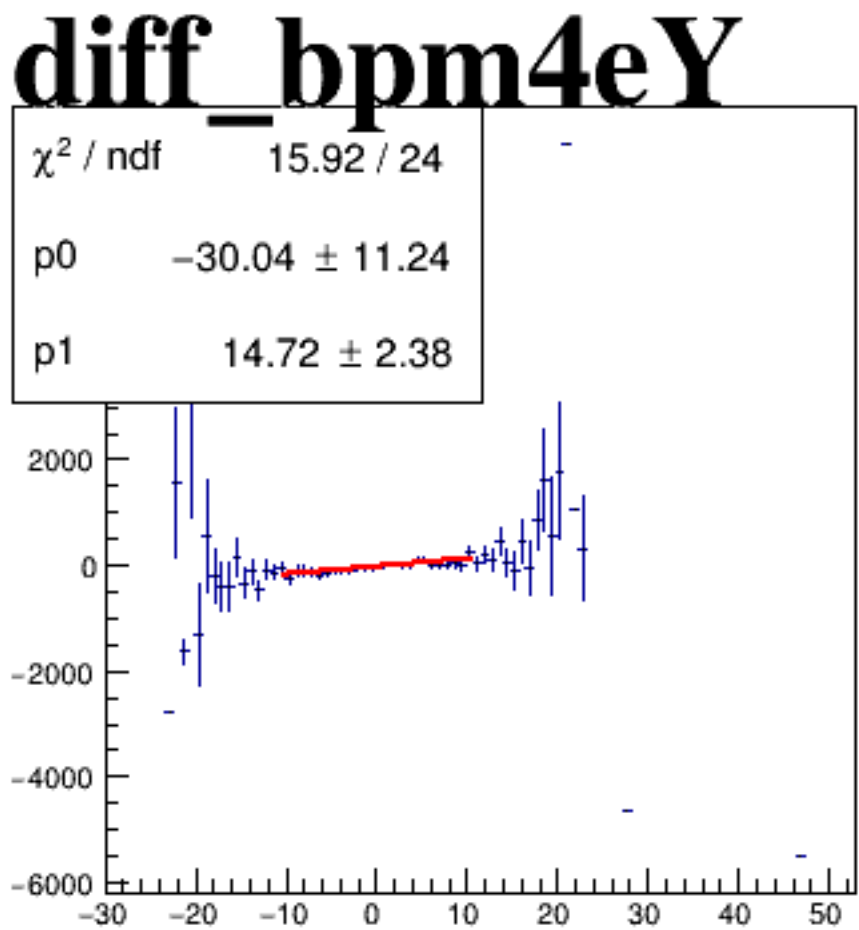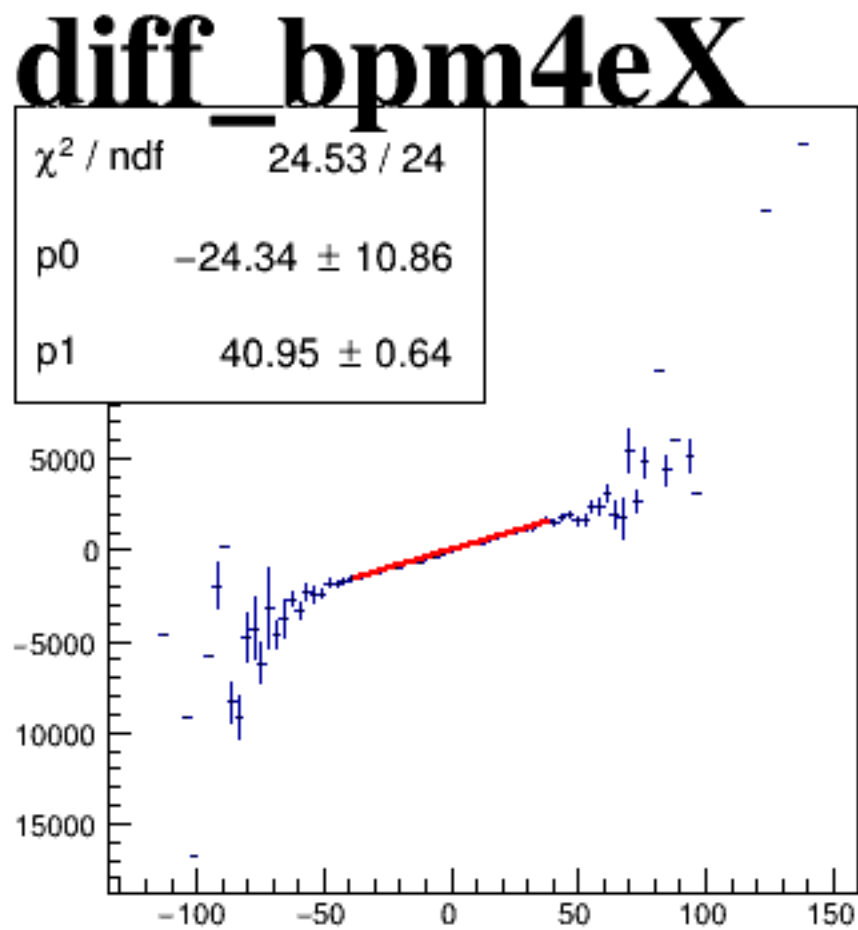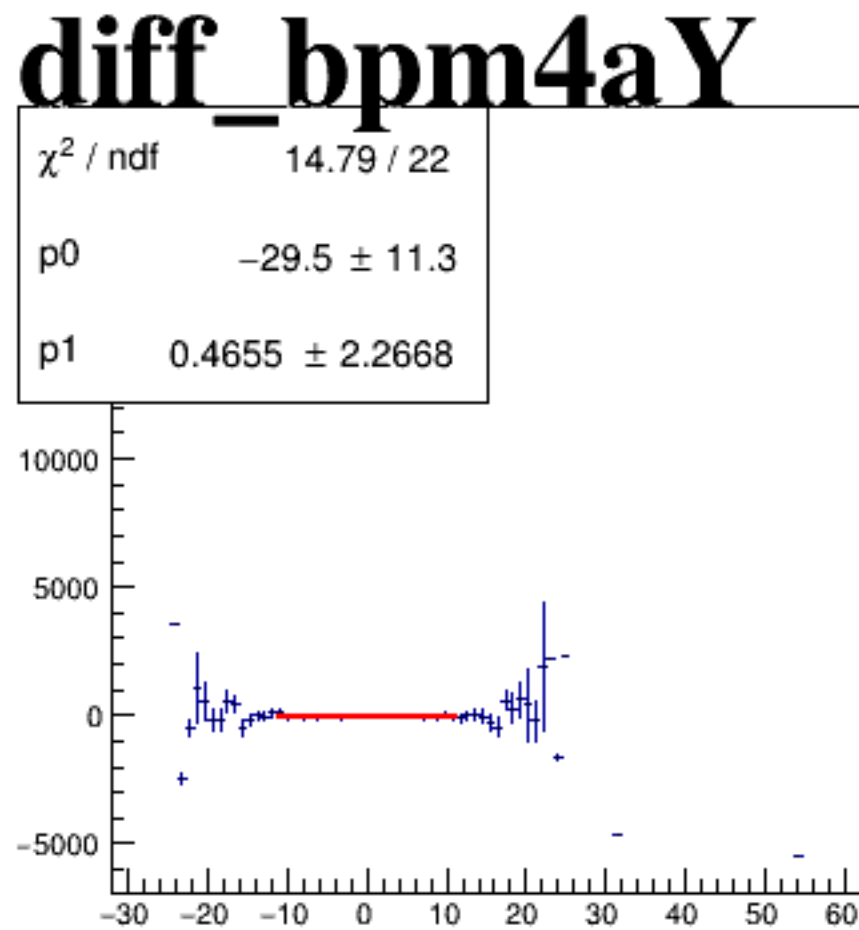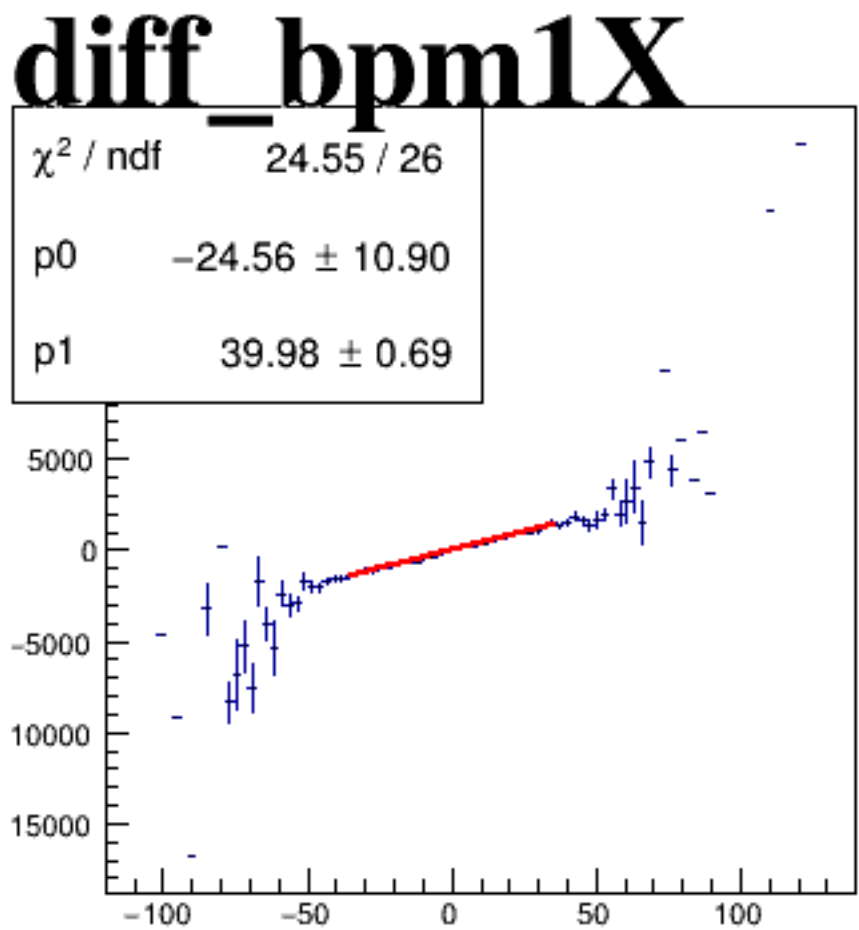






asym_atl2

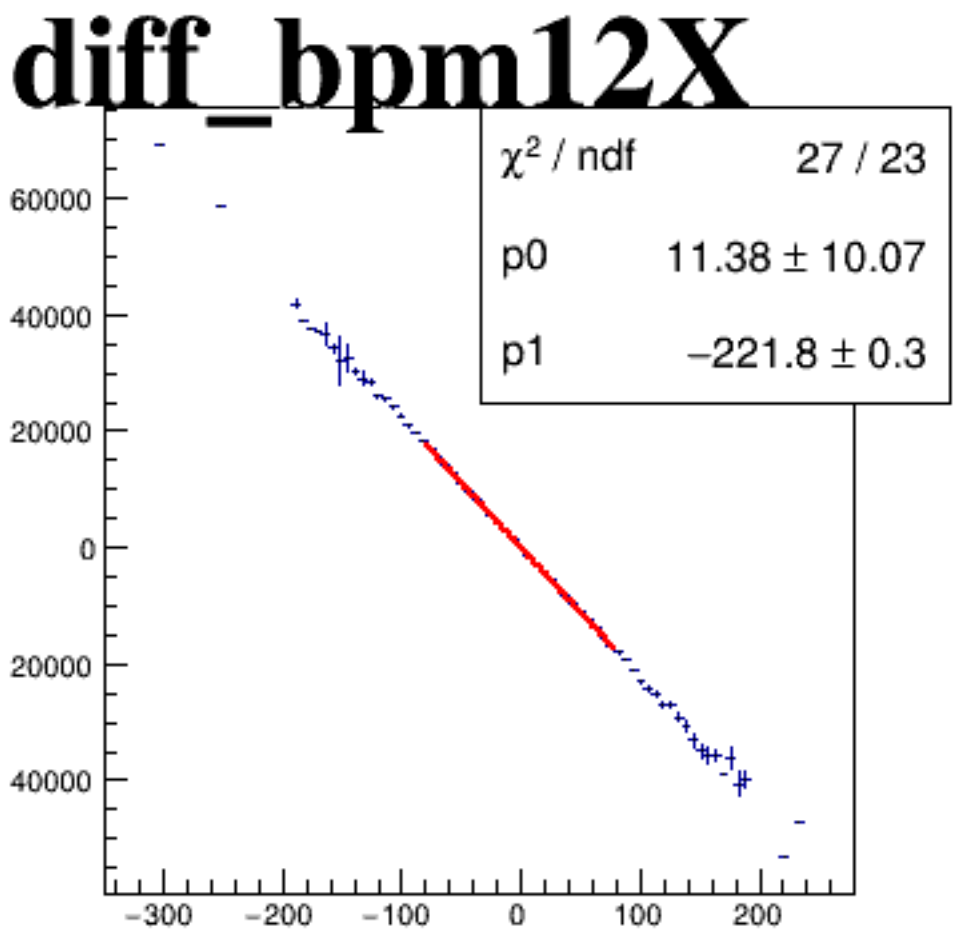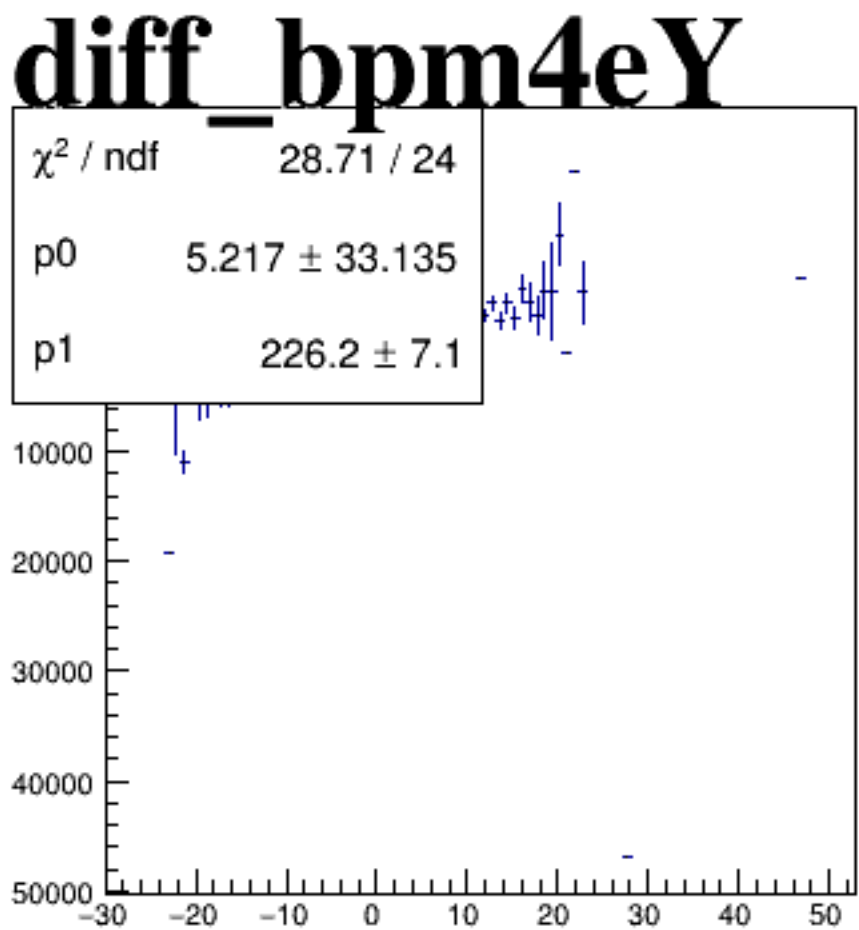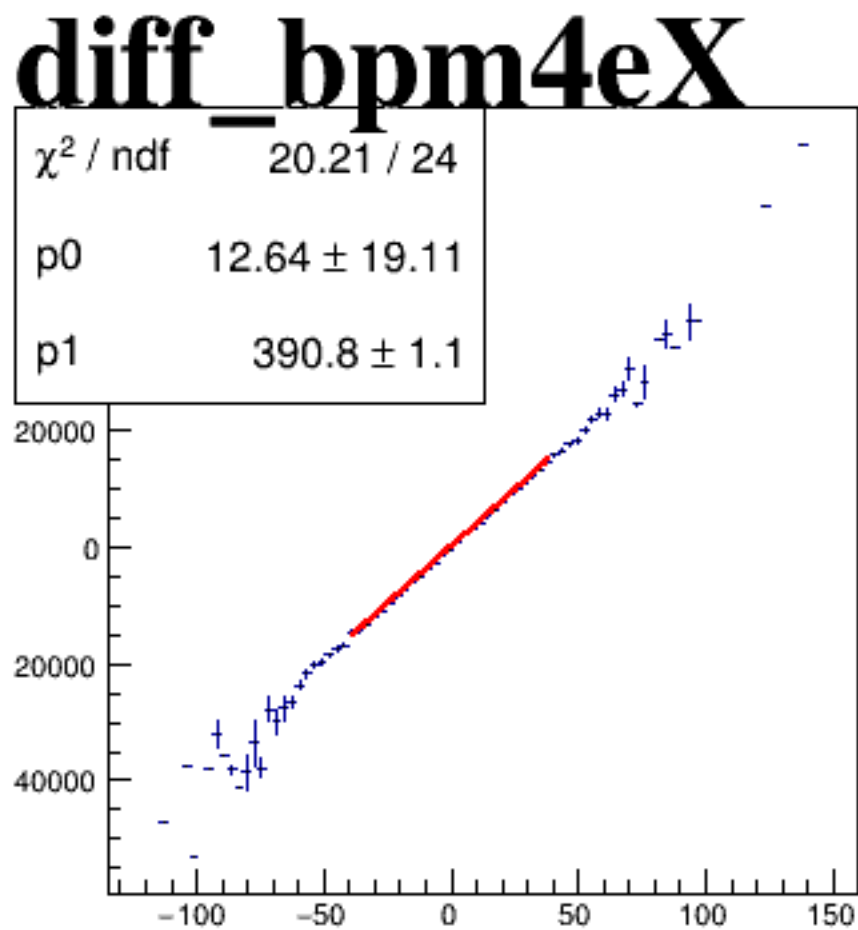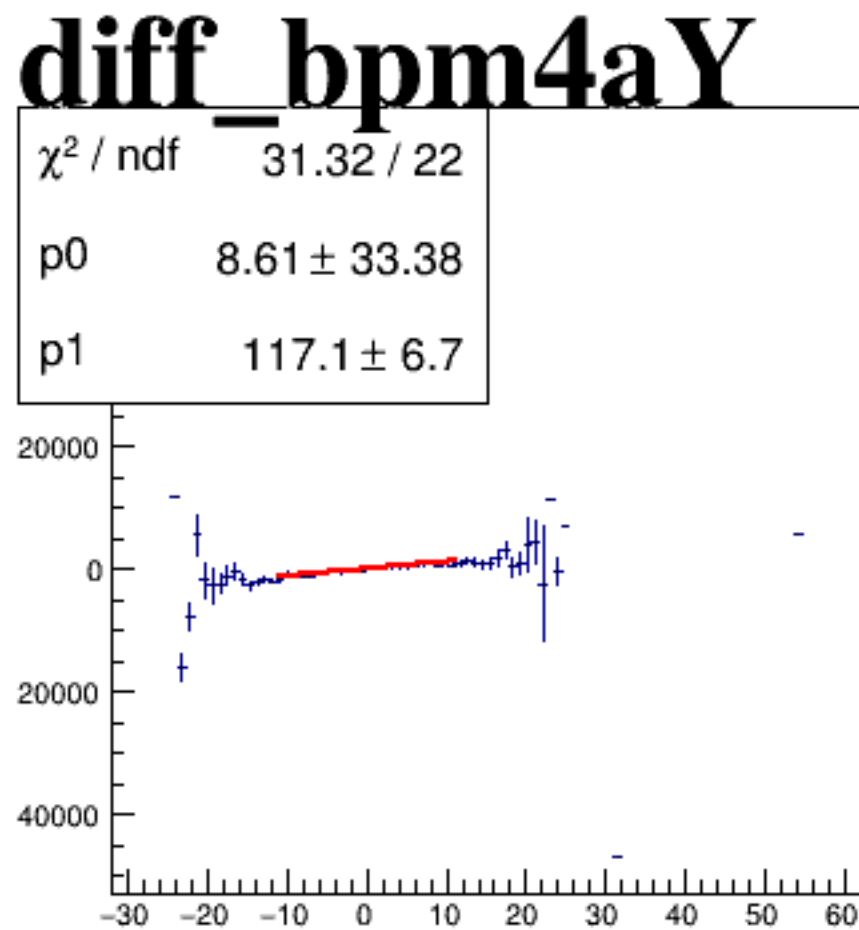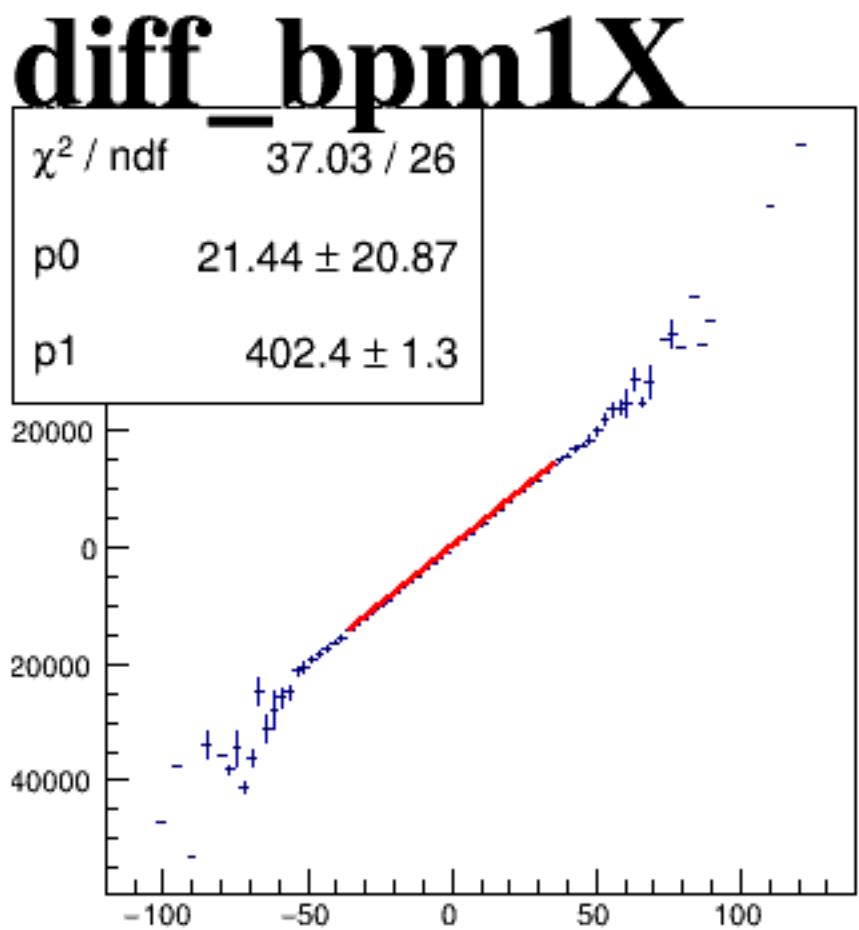






asym_atr2

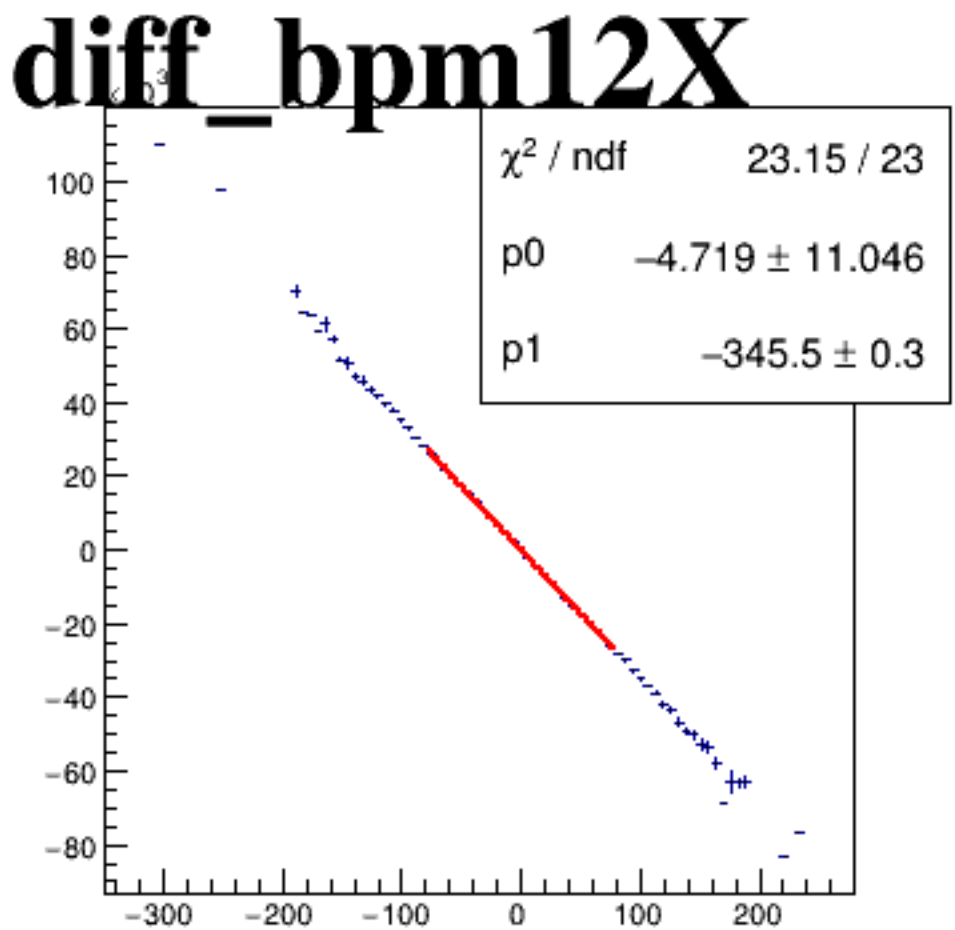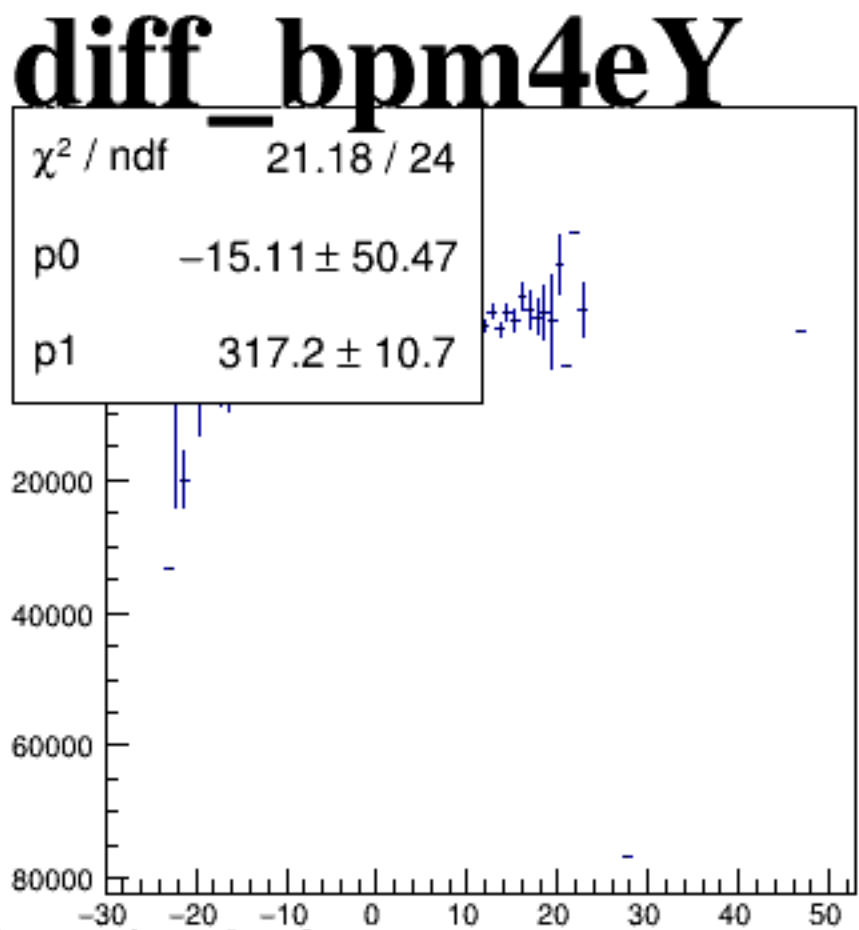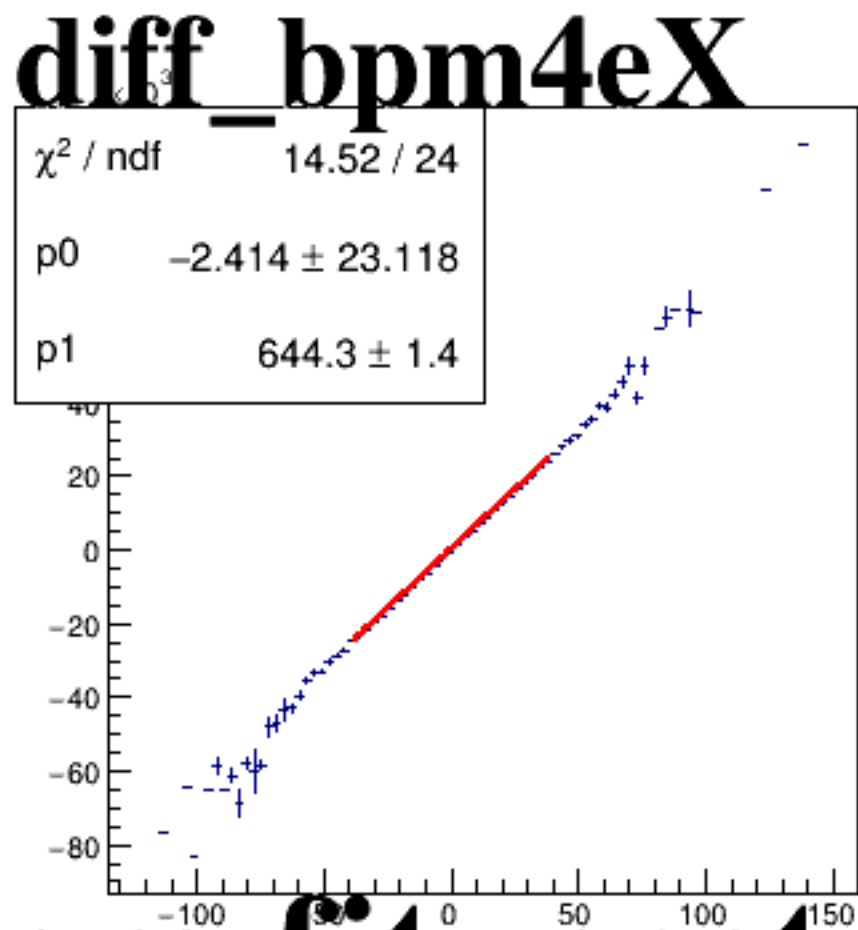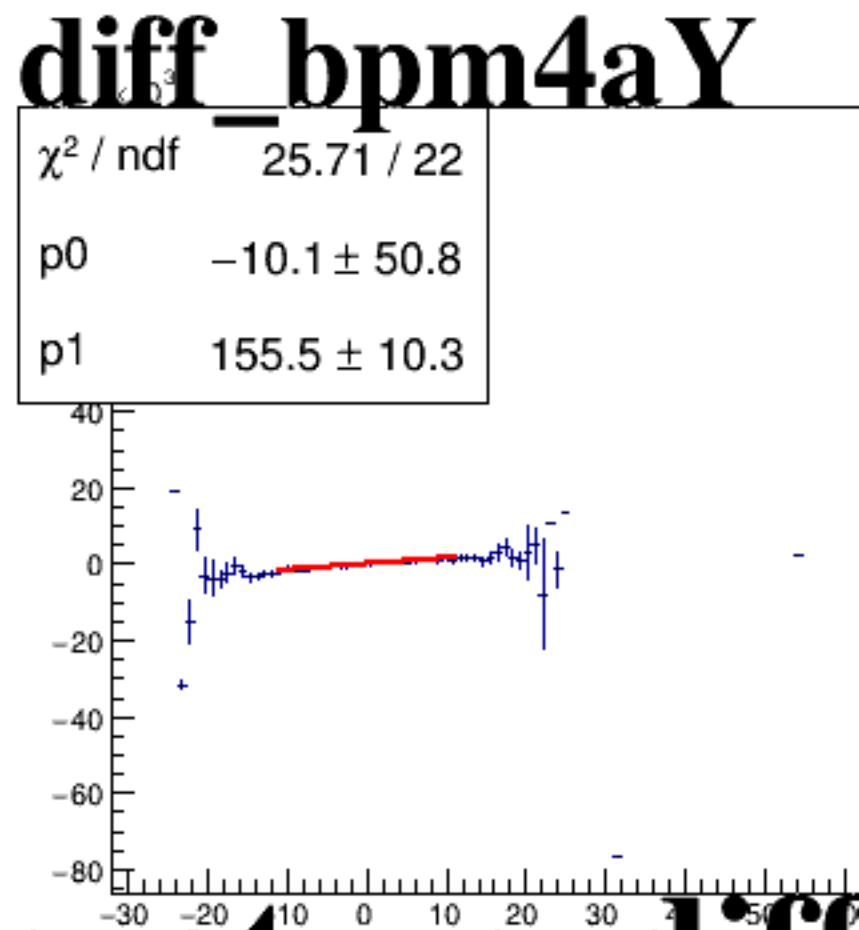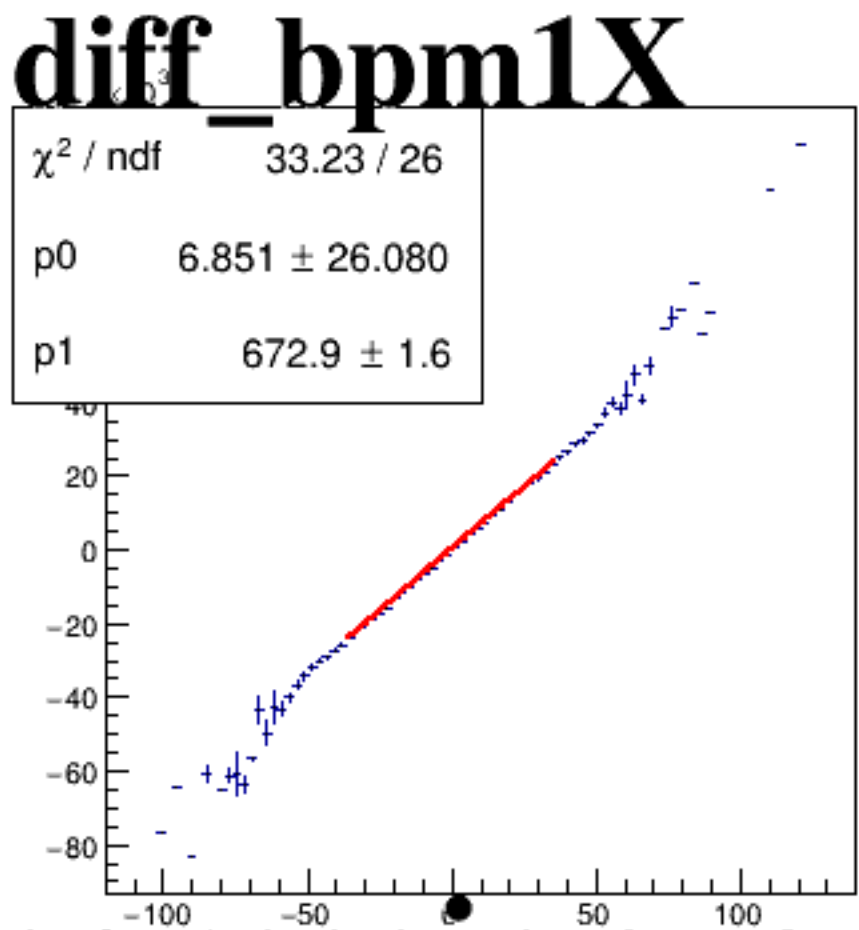






reg_asym_atl1

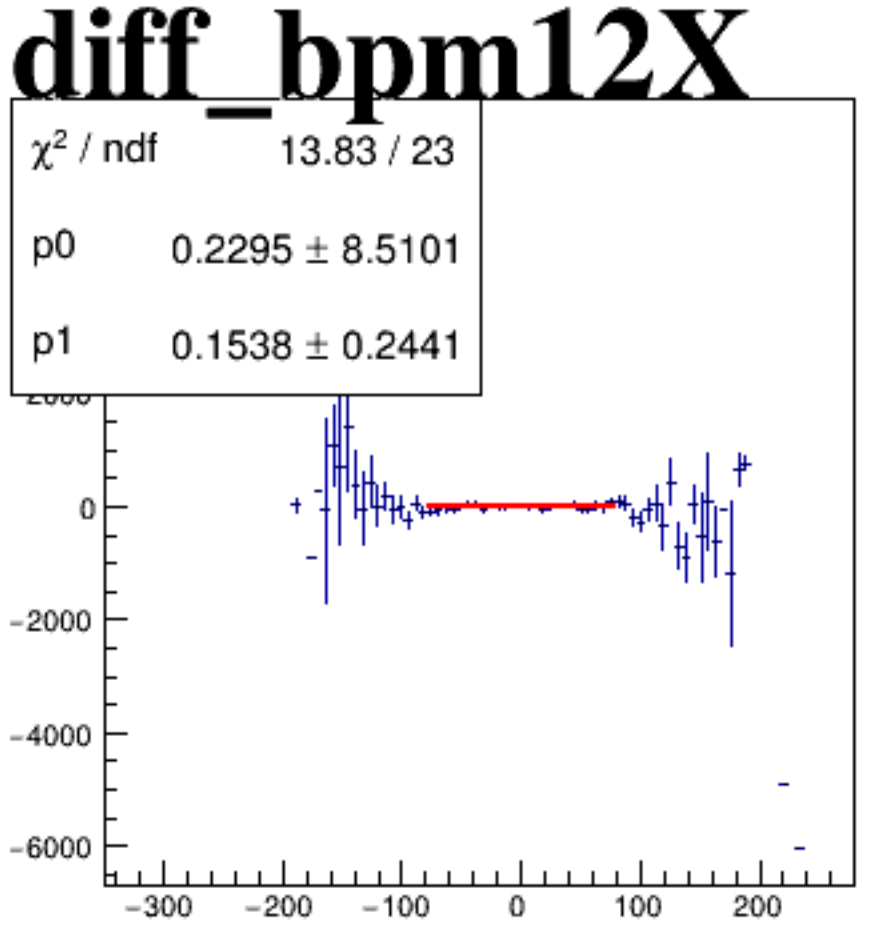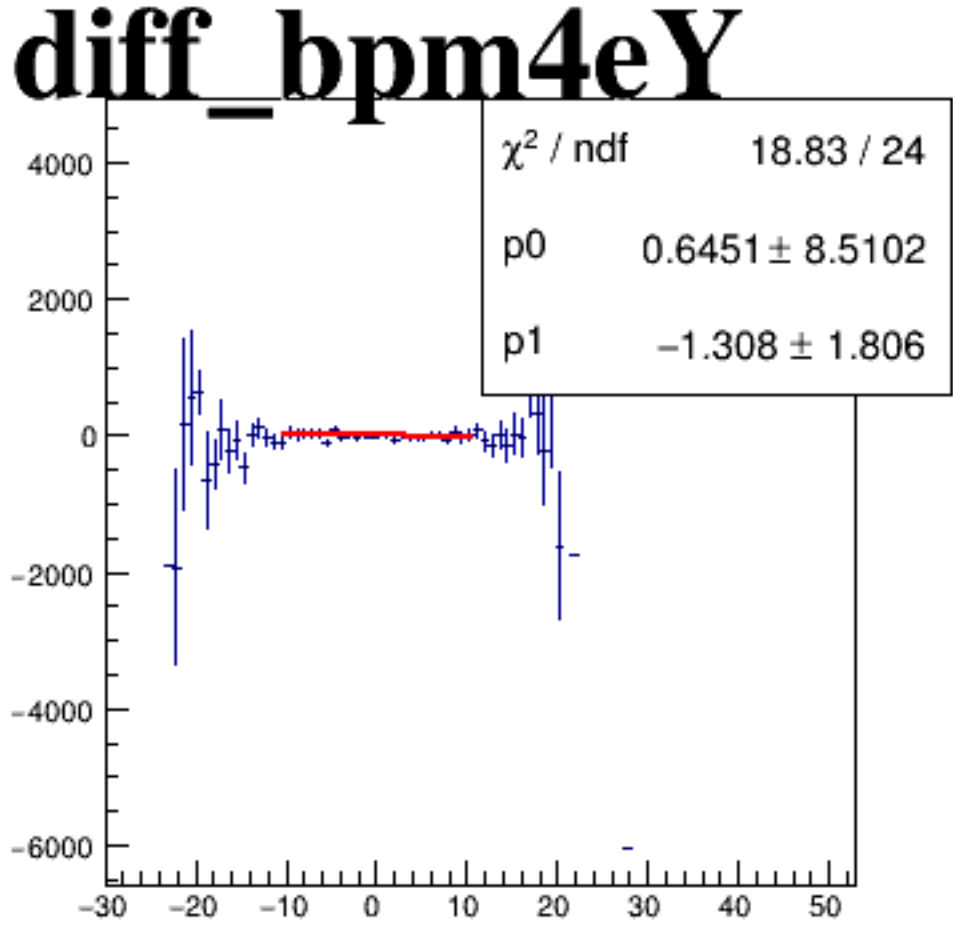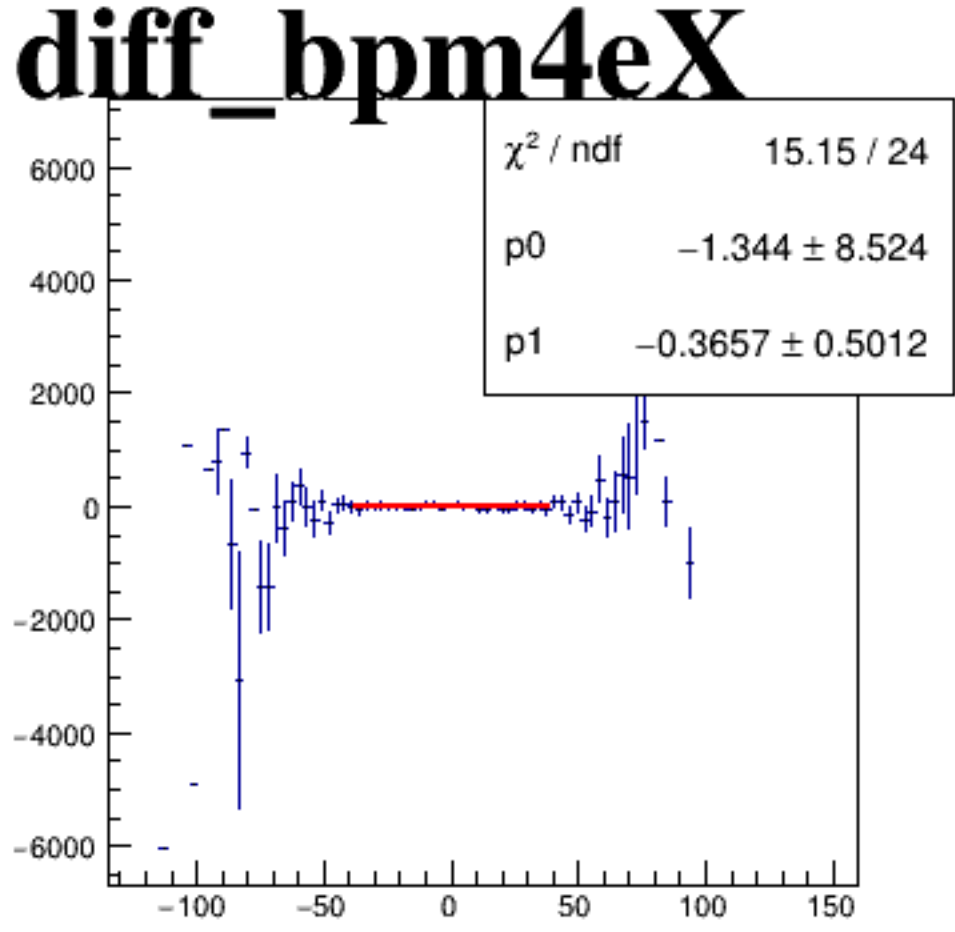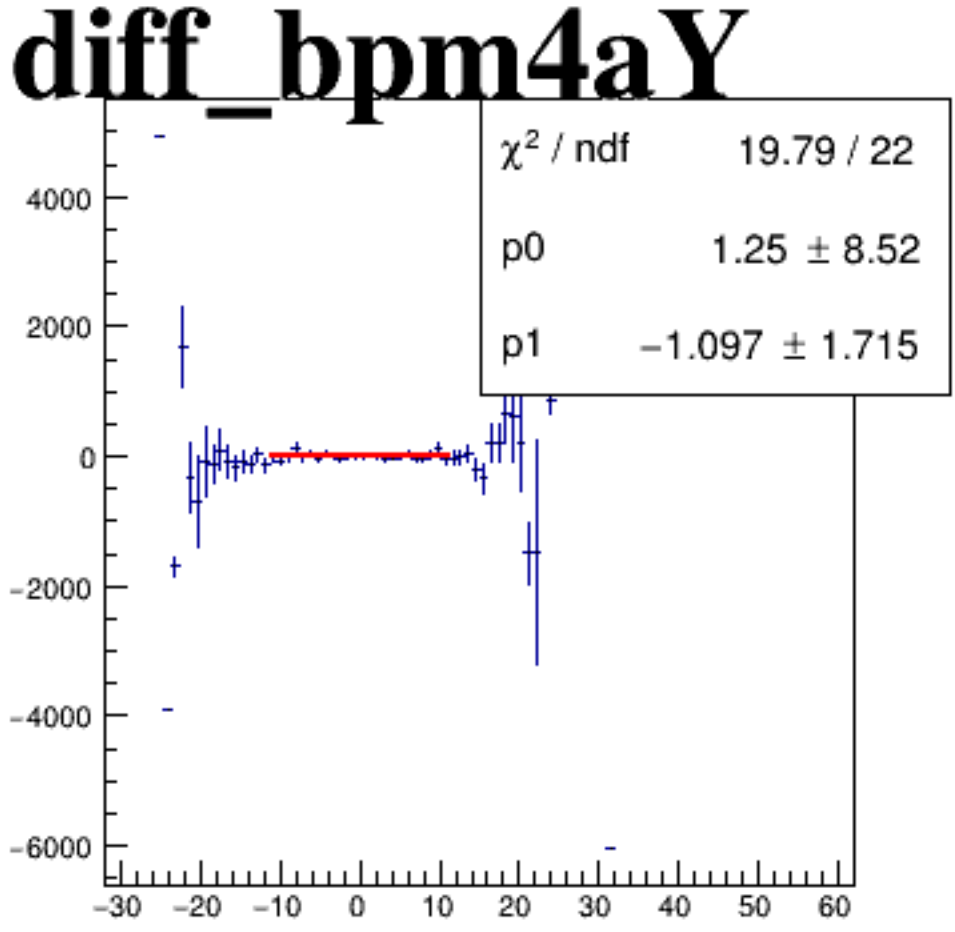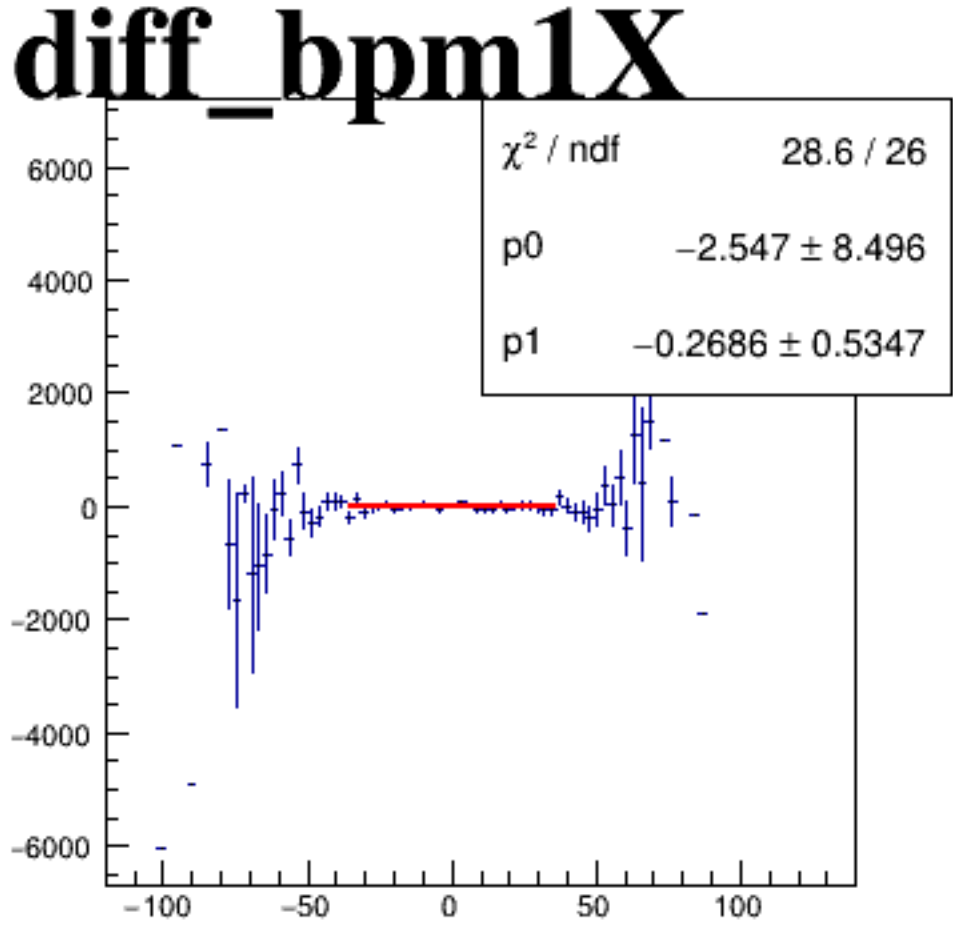






reg_asym_atr1

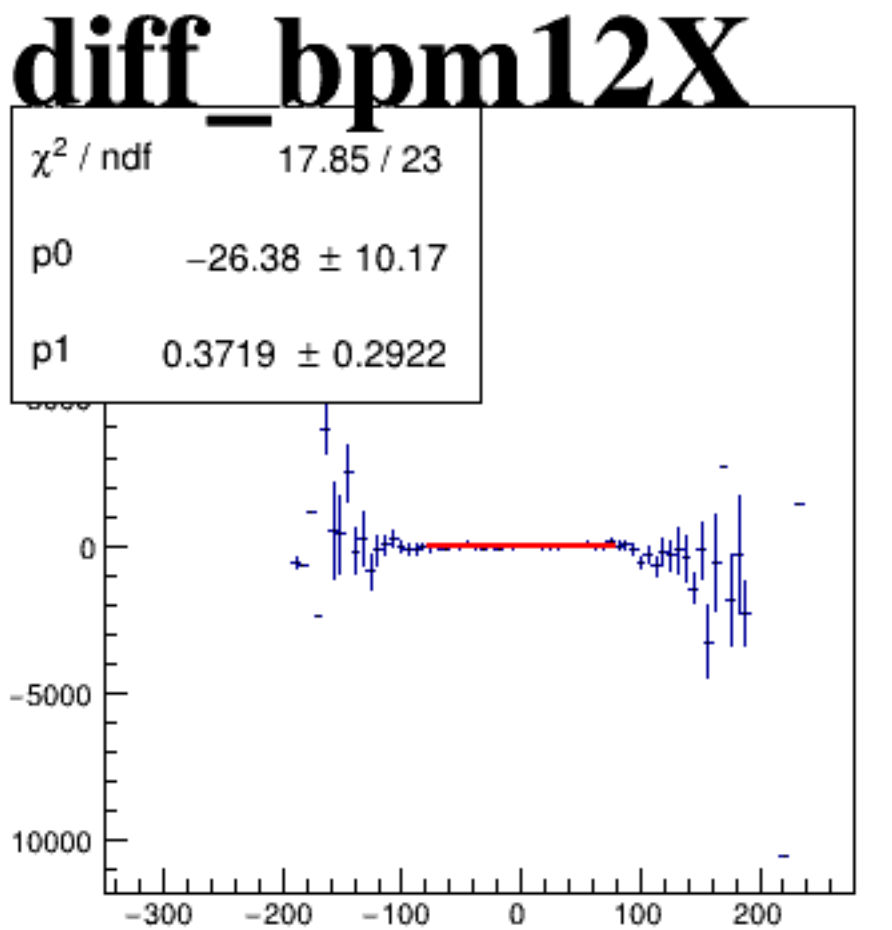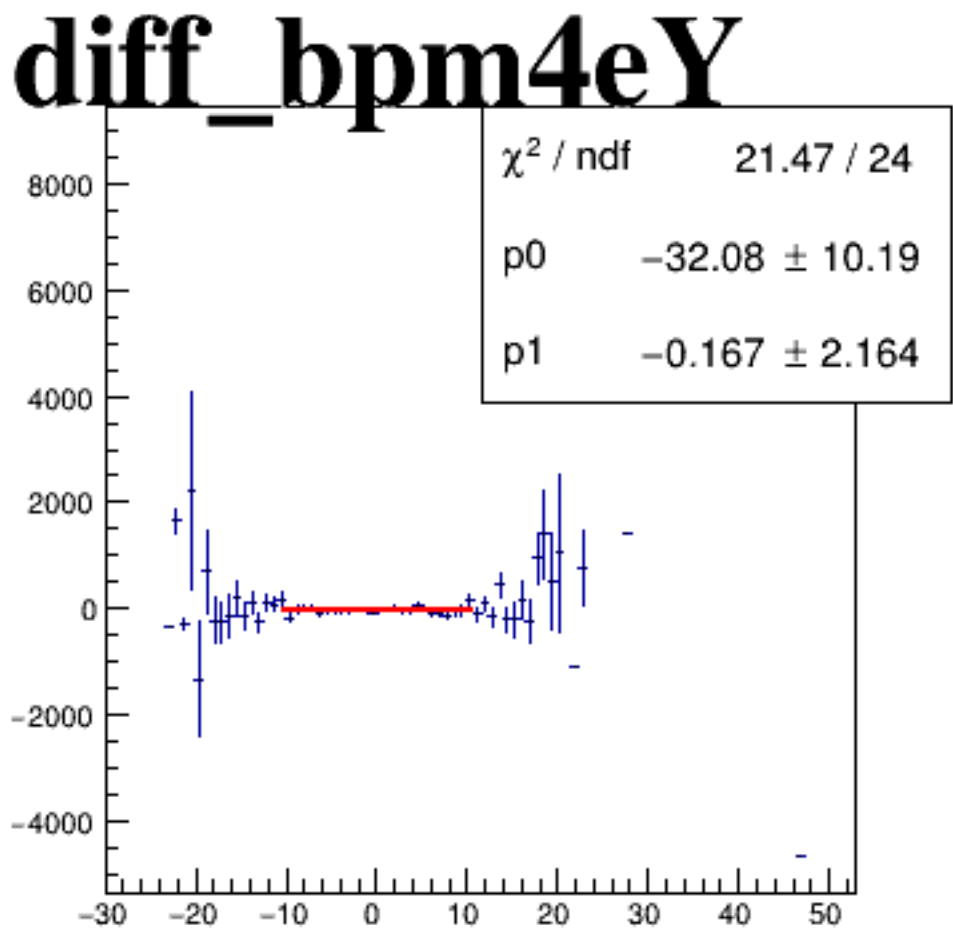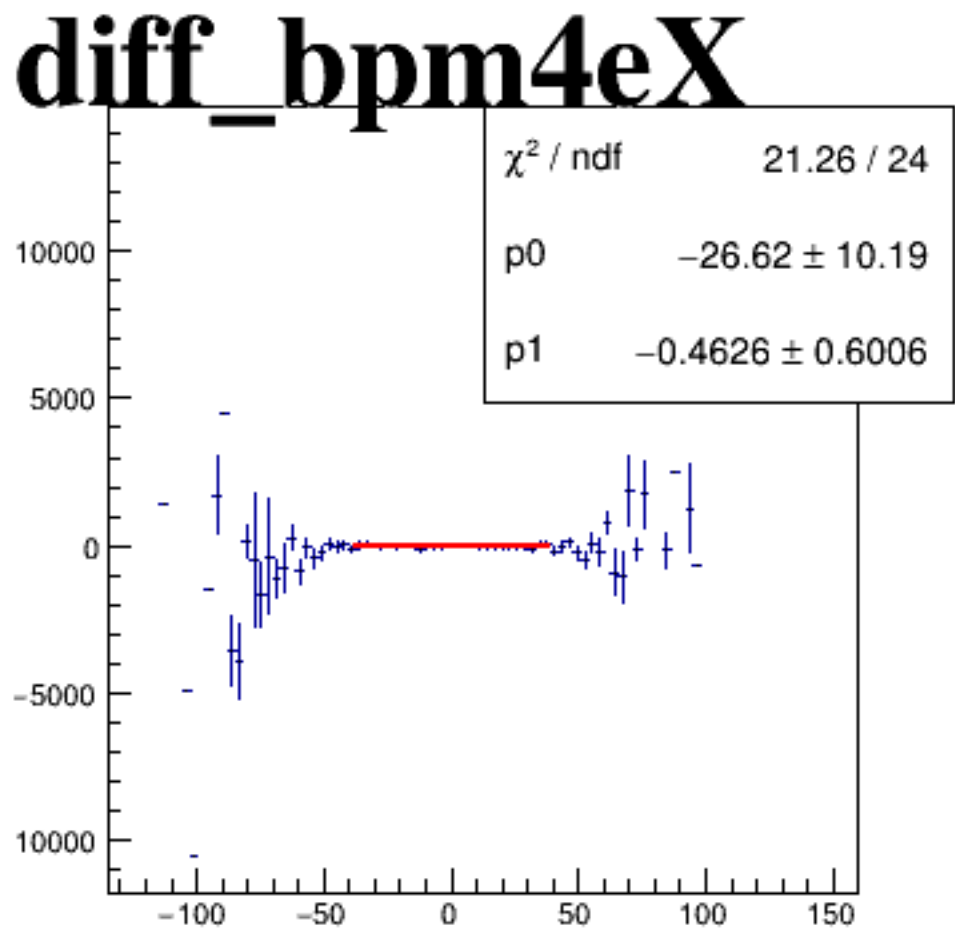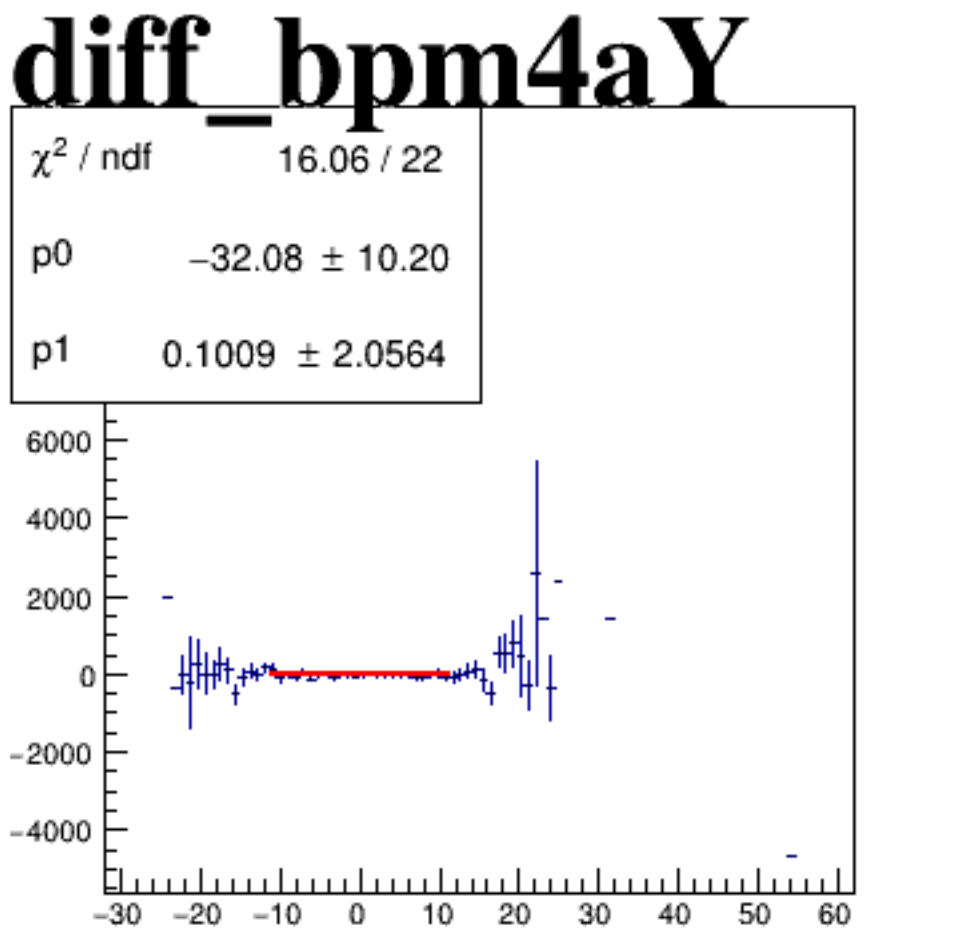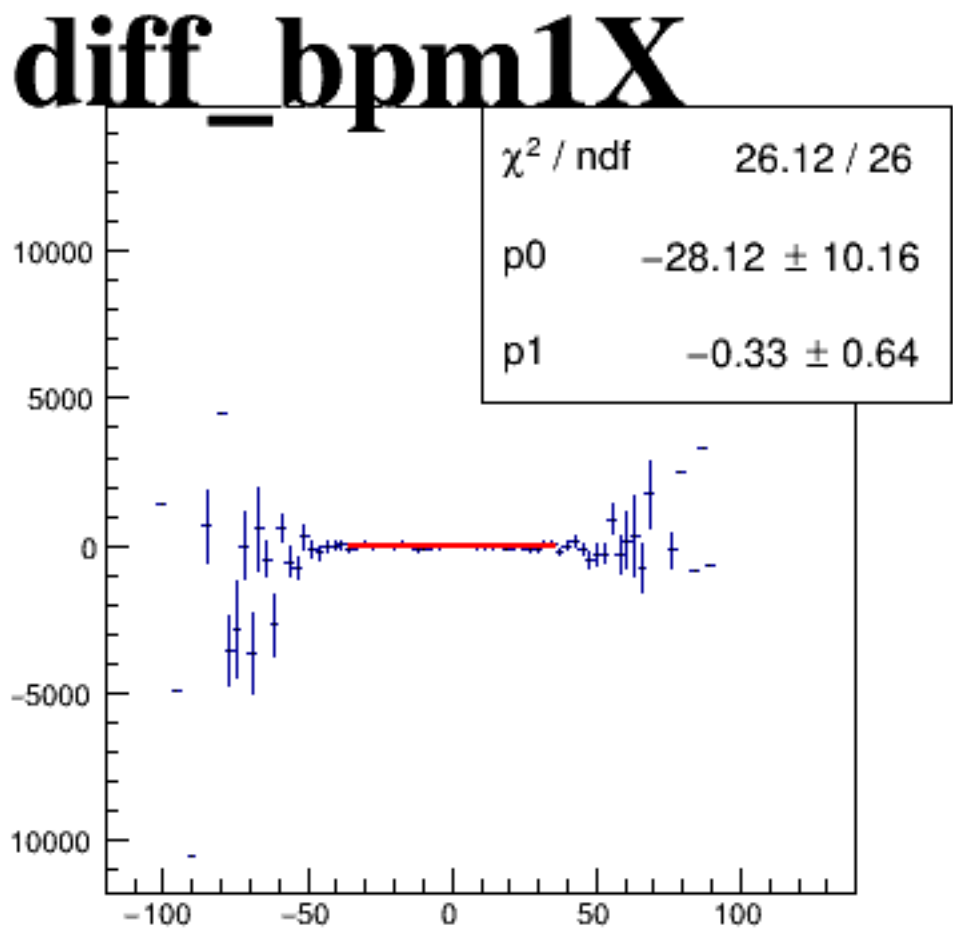






reg_asym_atl2

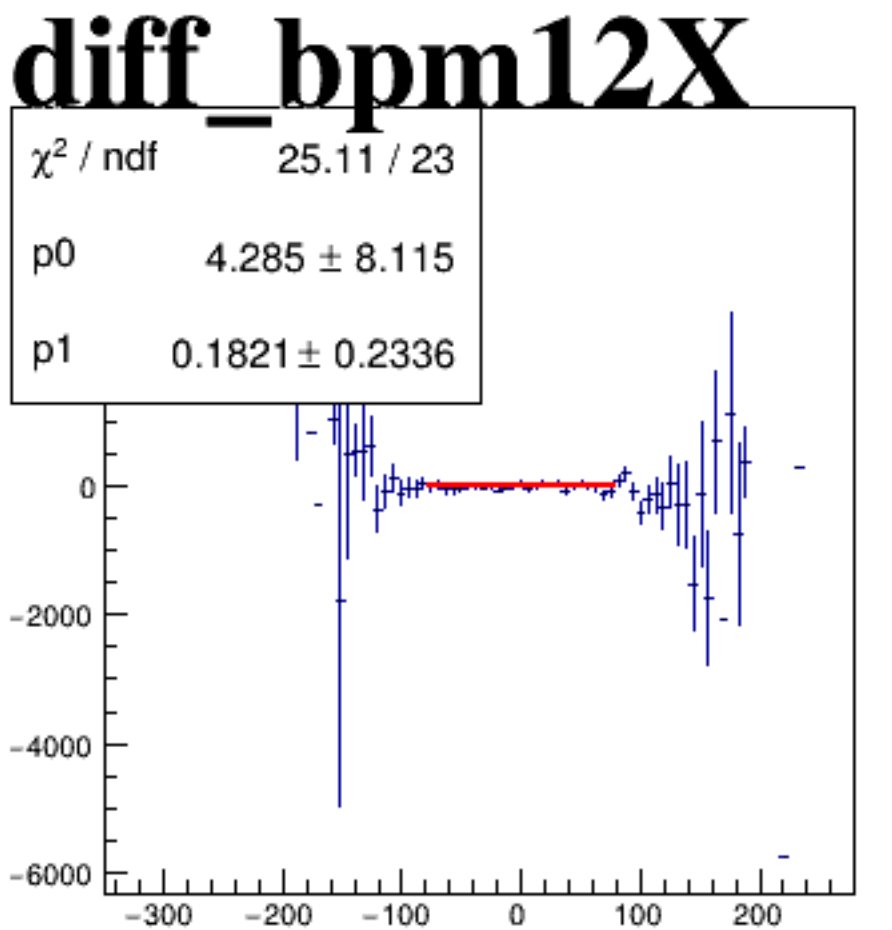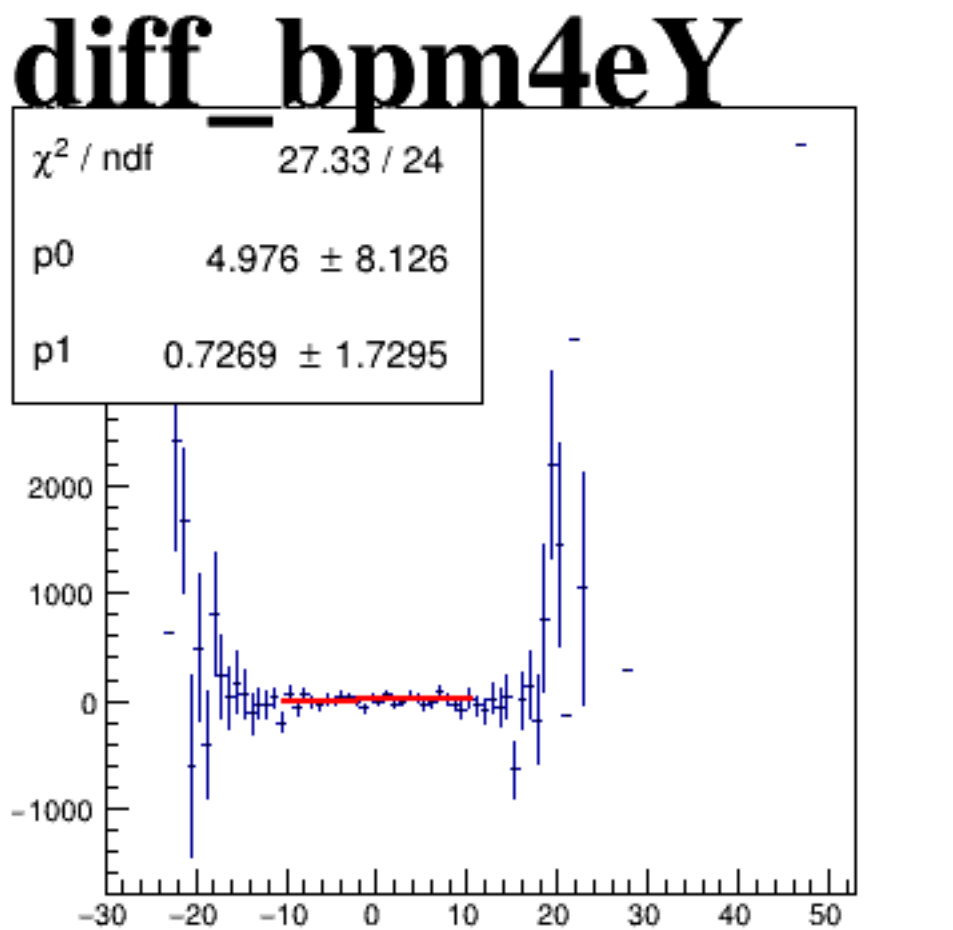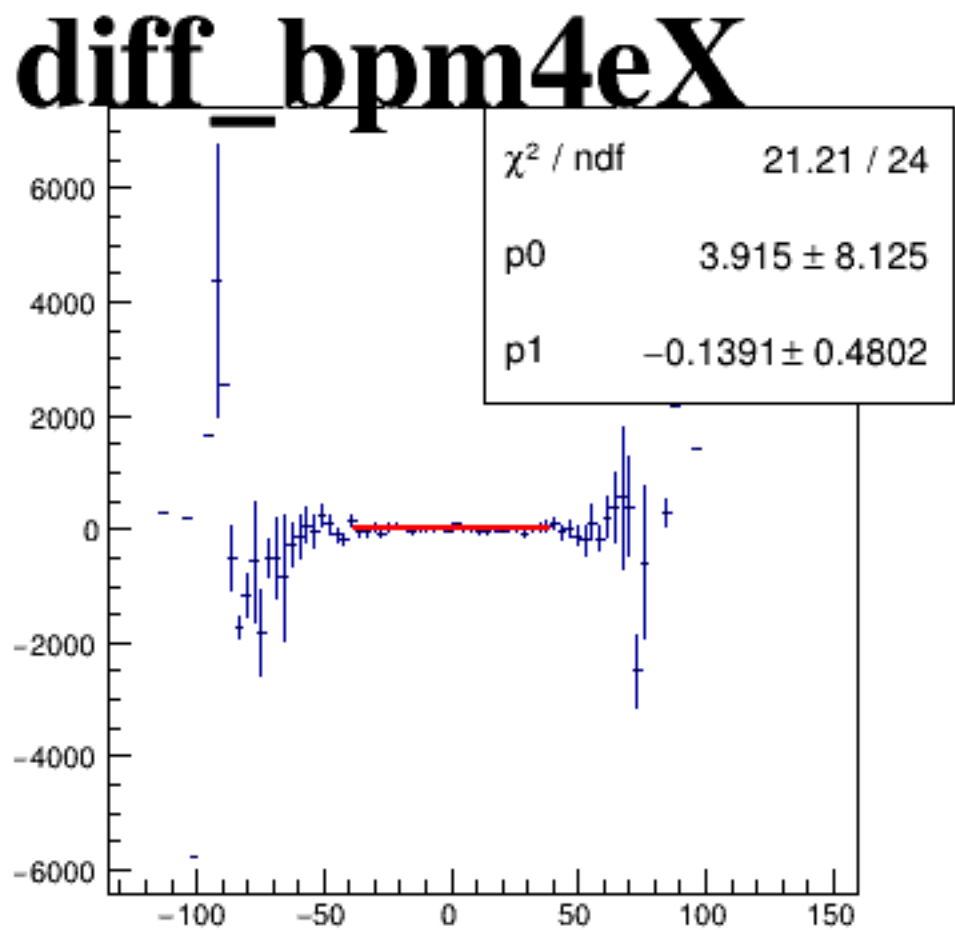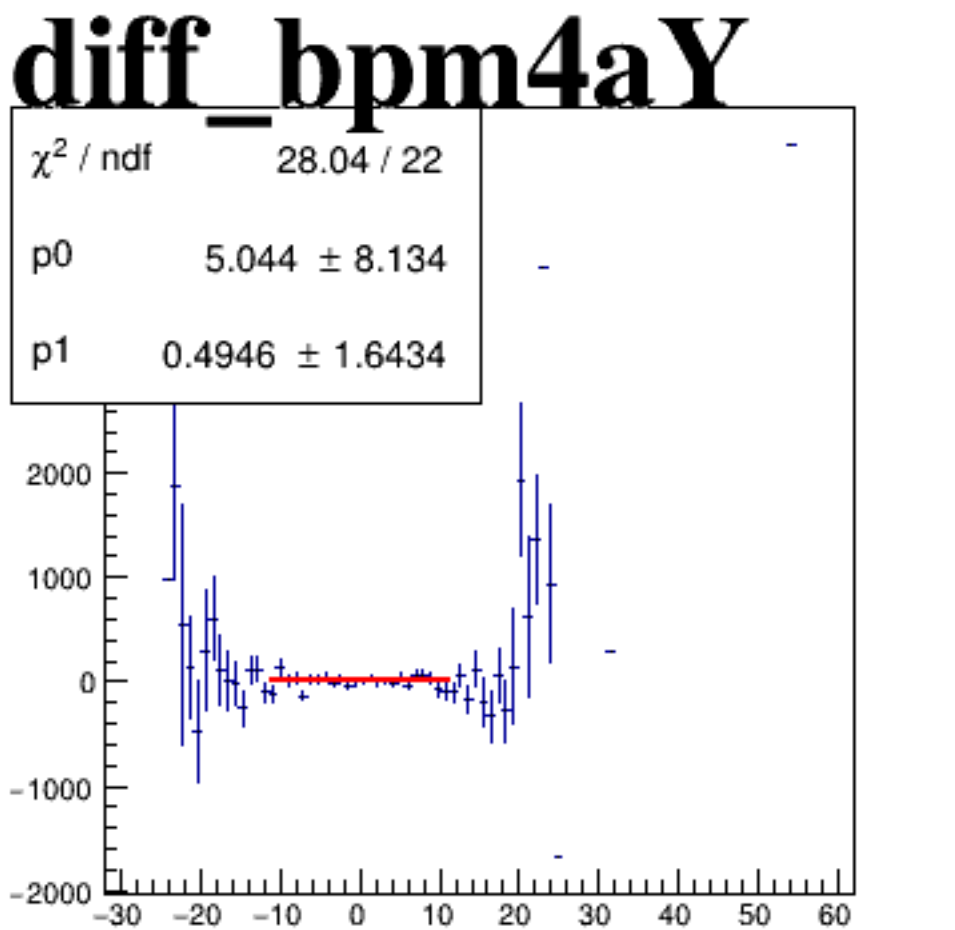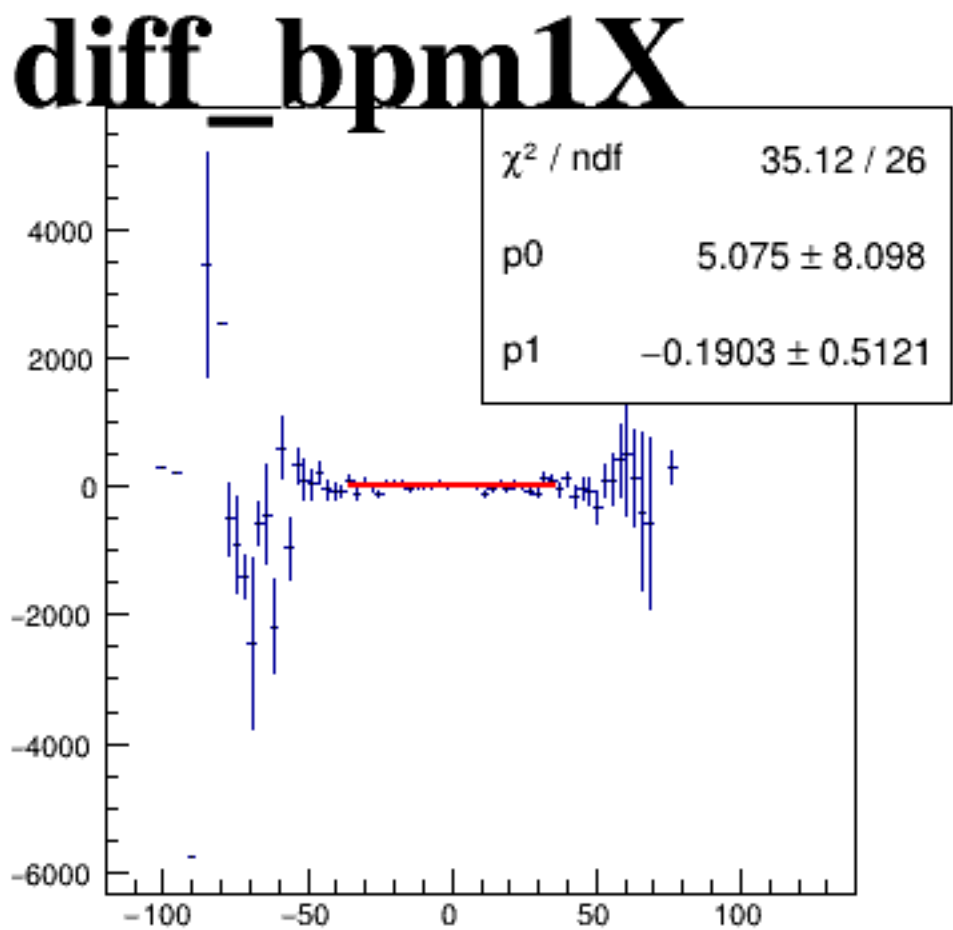






reg_asym_atr2

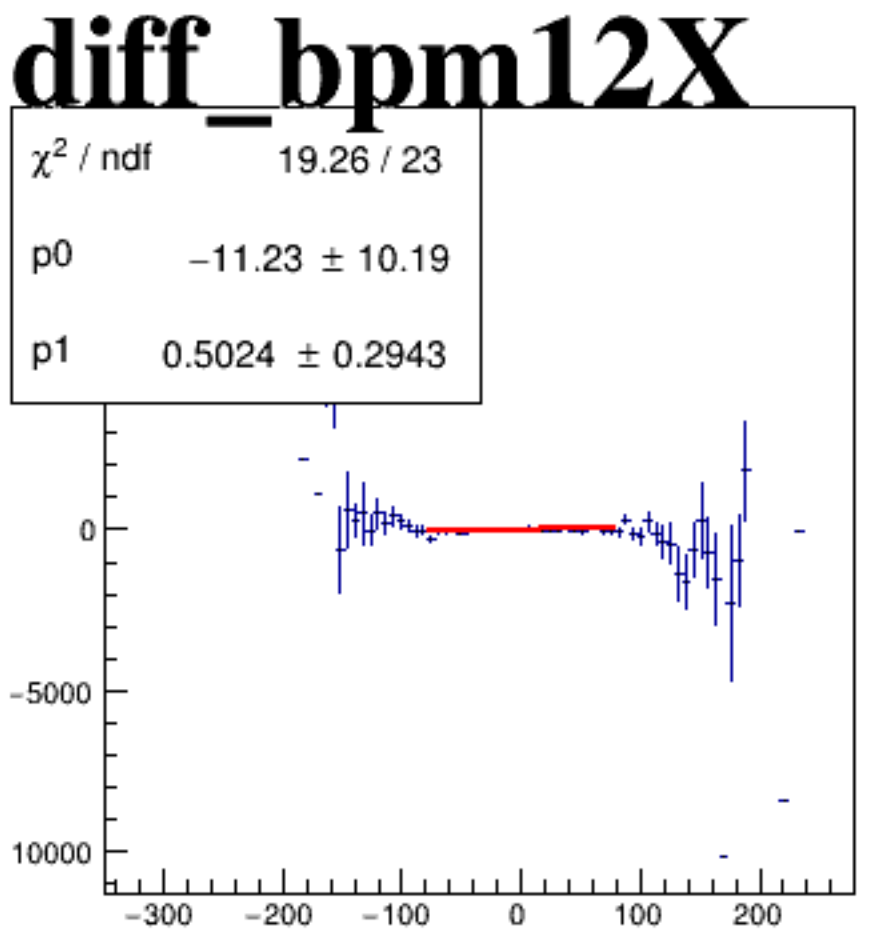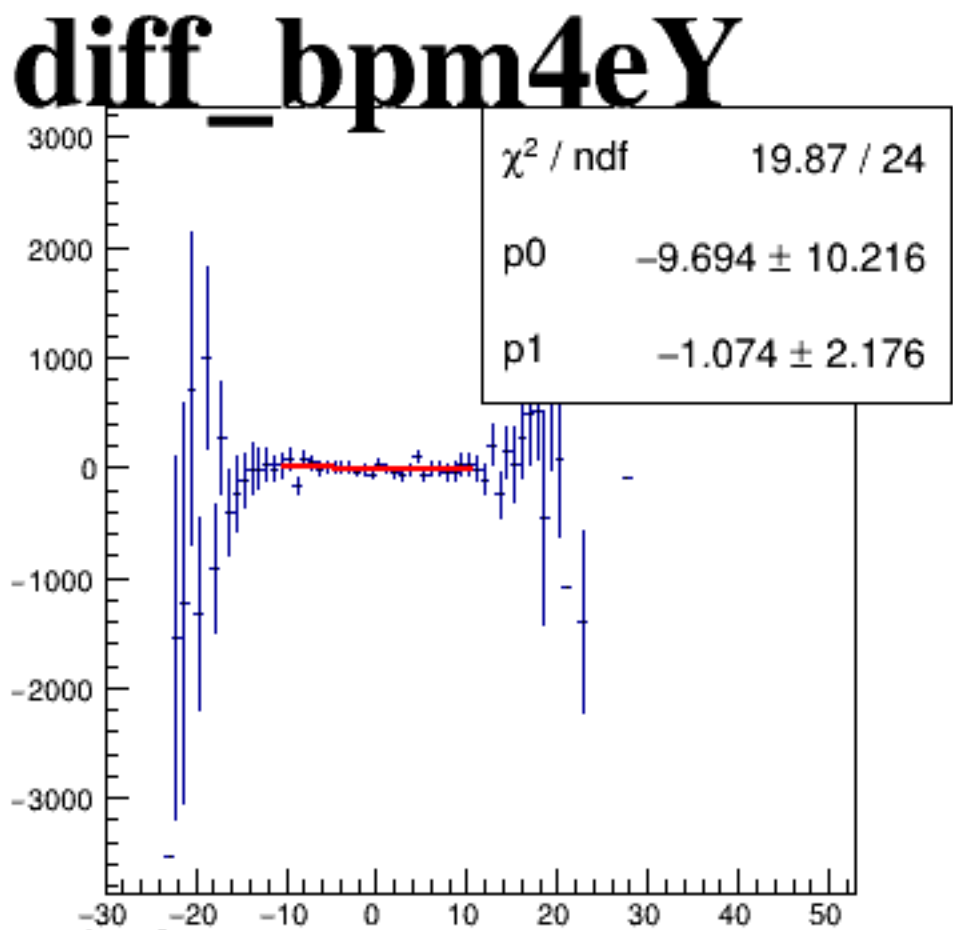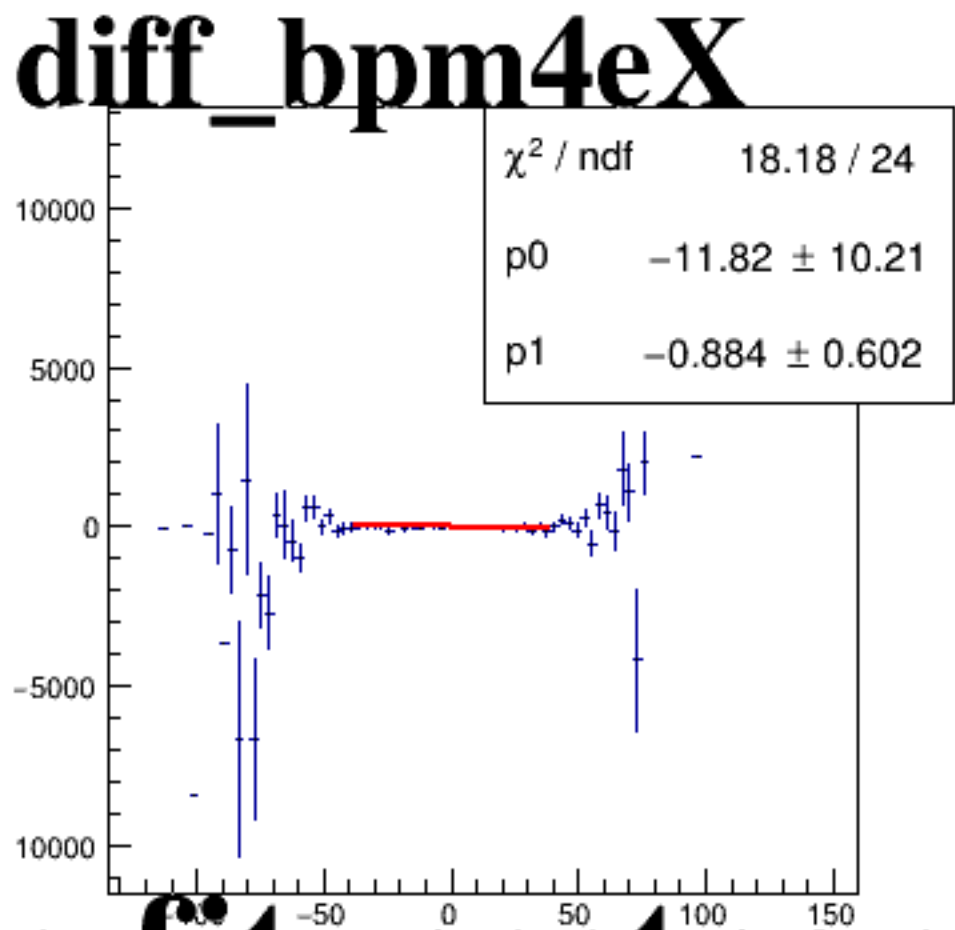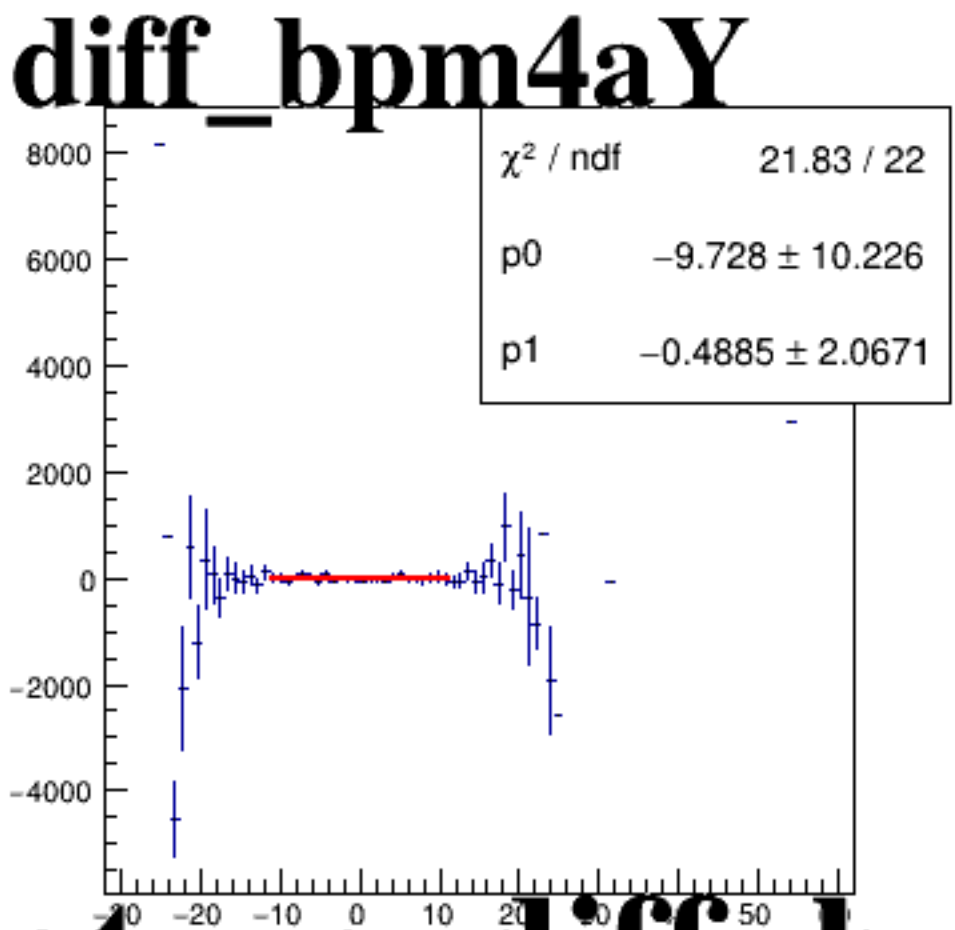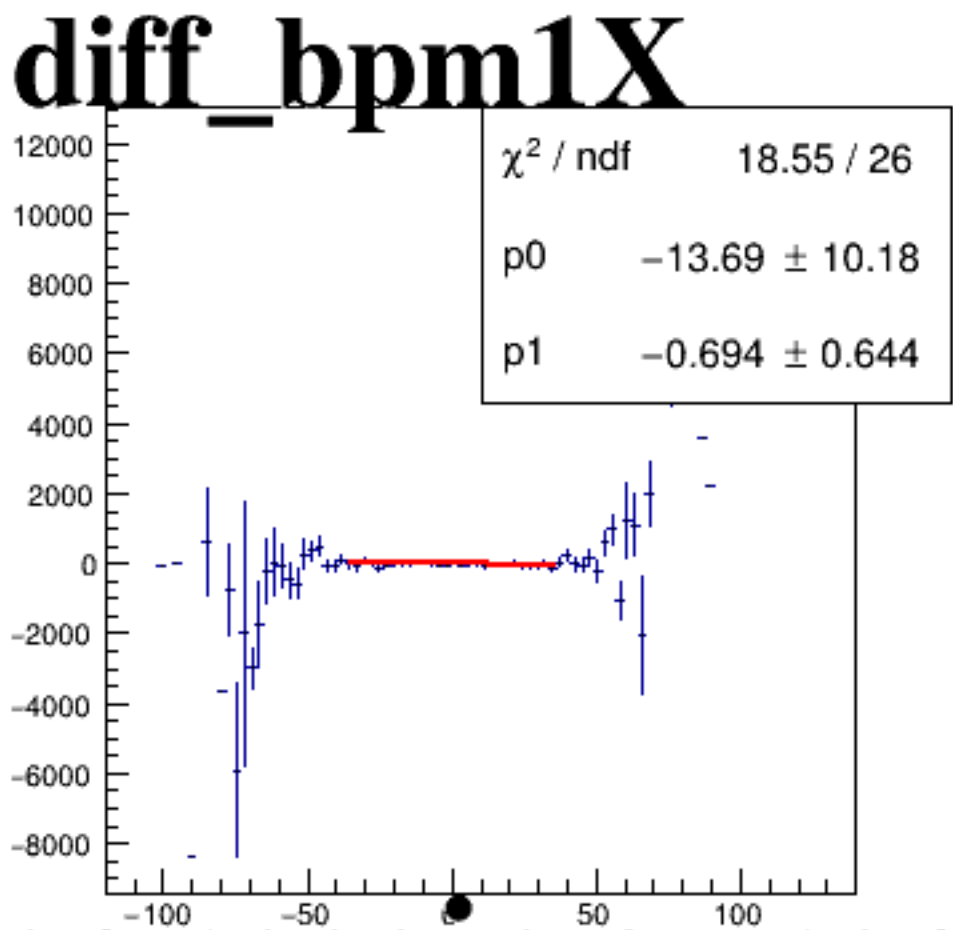






asym_atl1

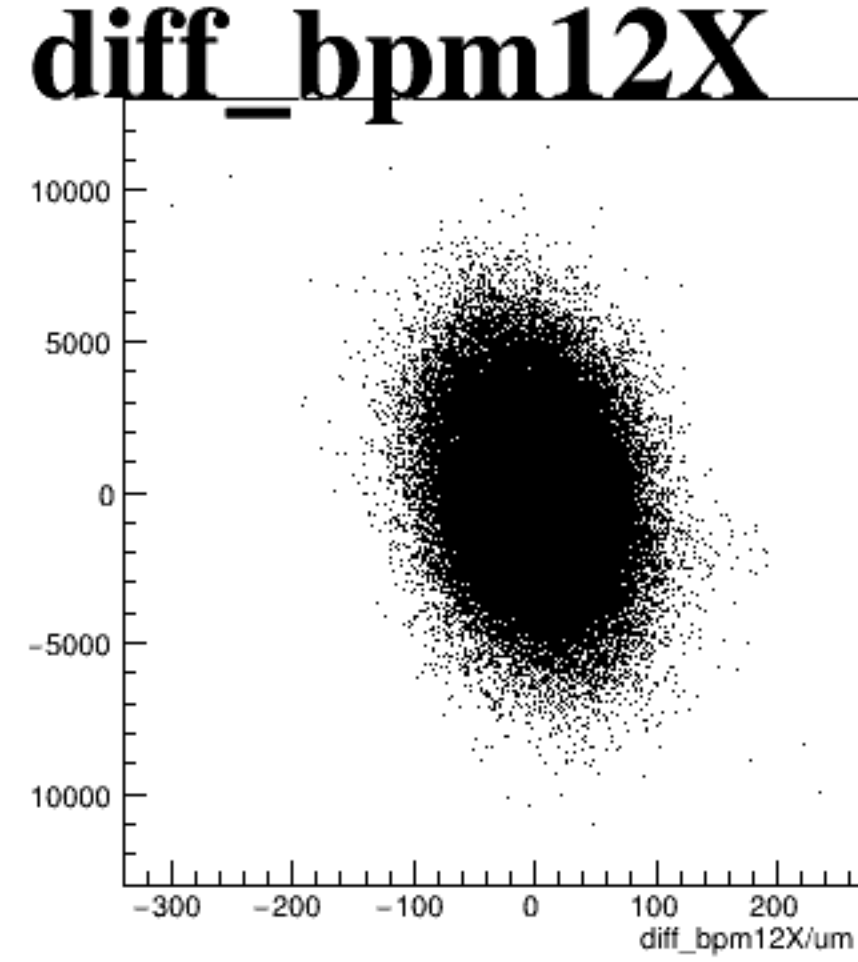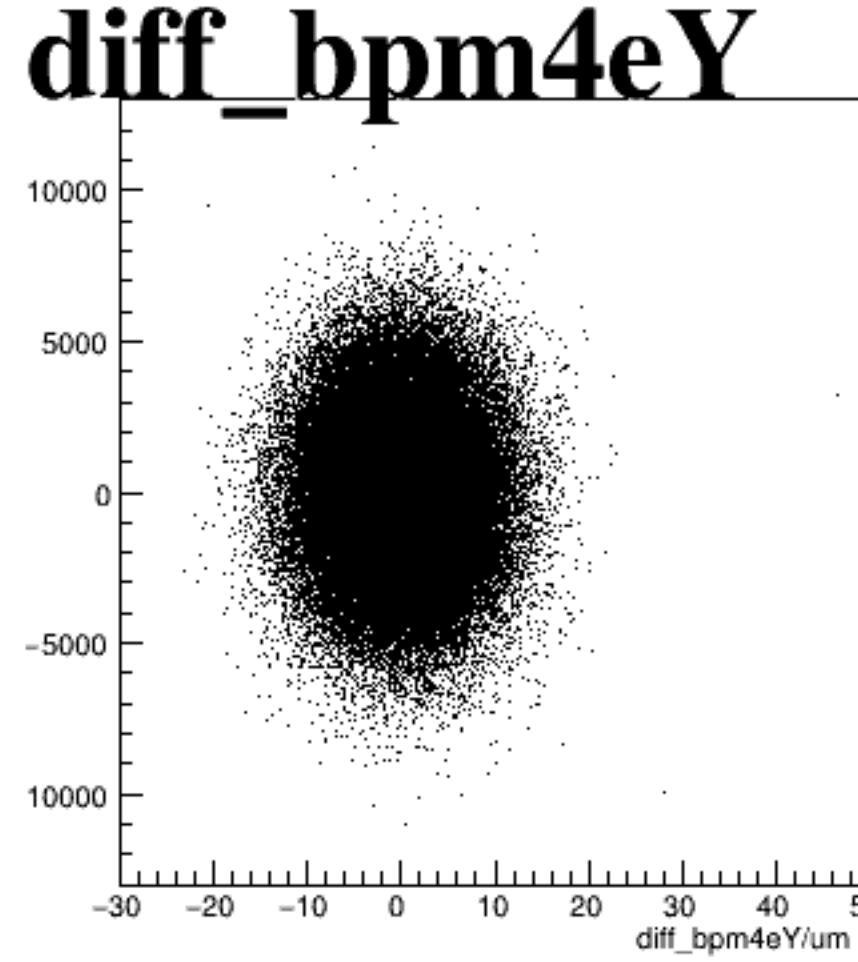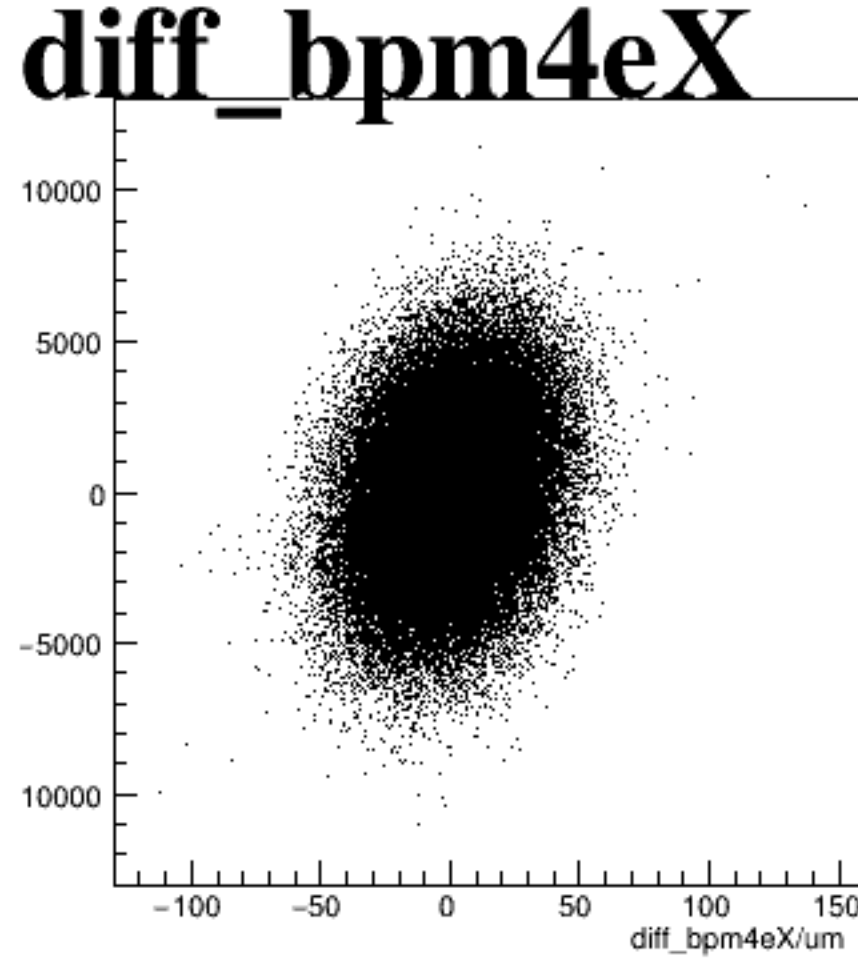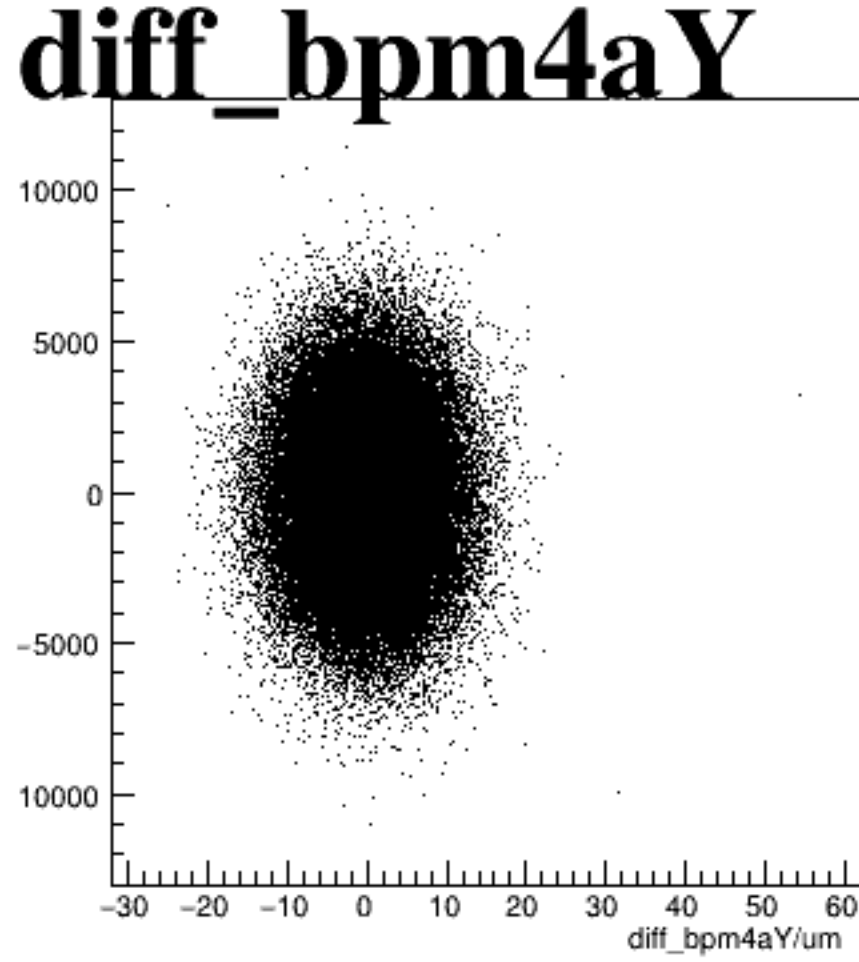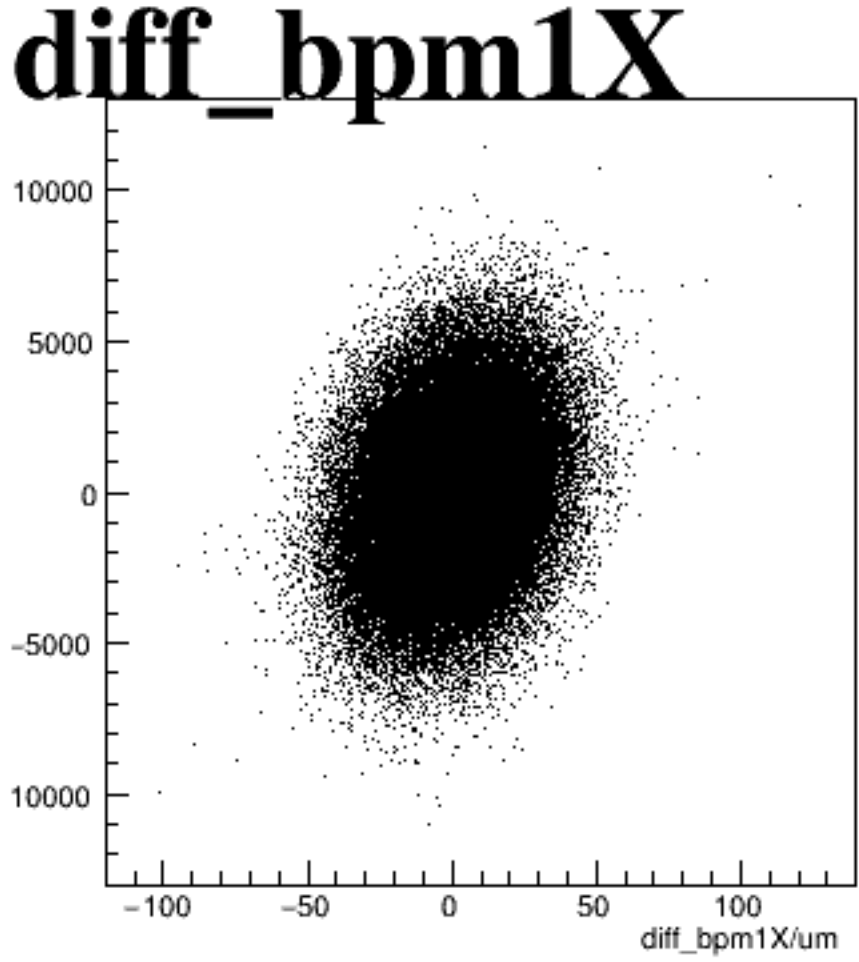






asym_atr1

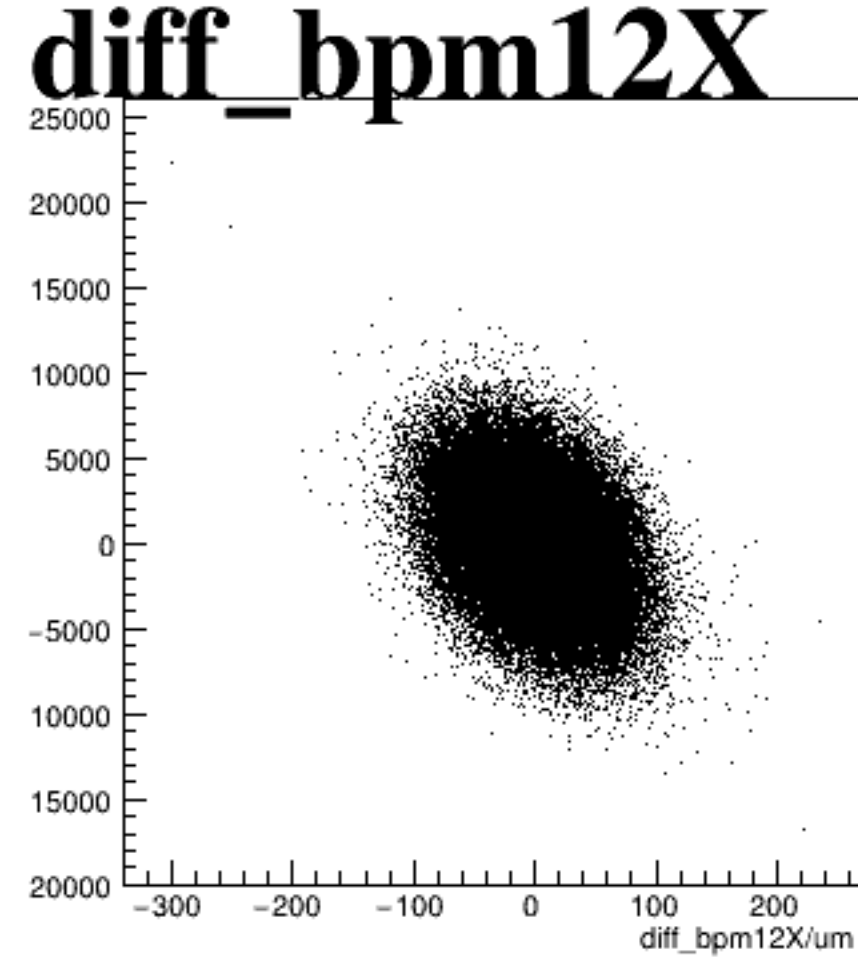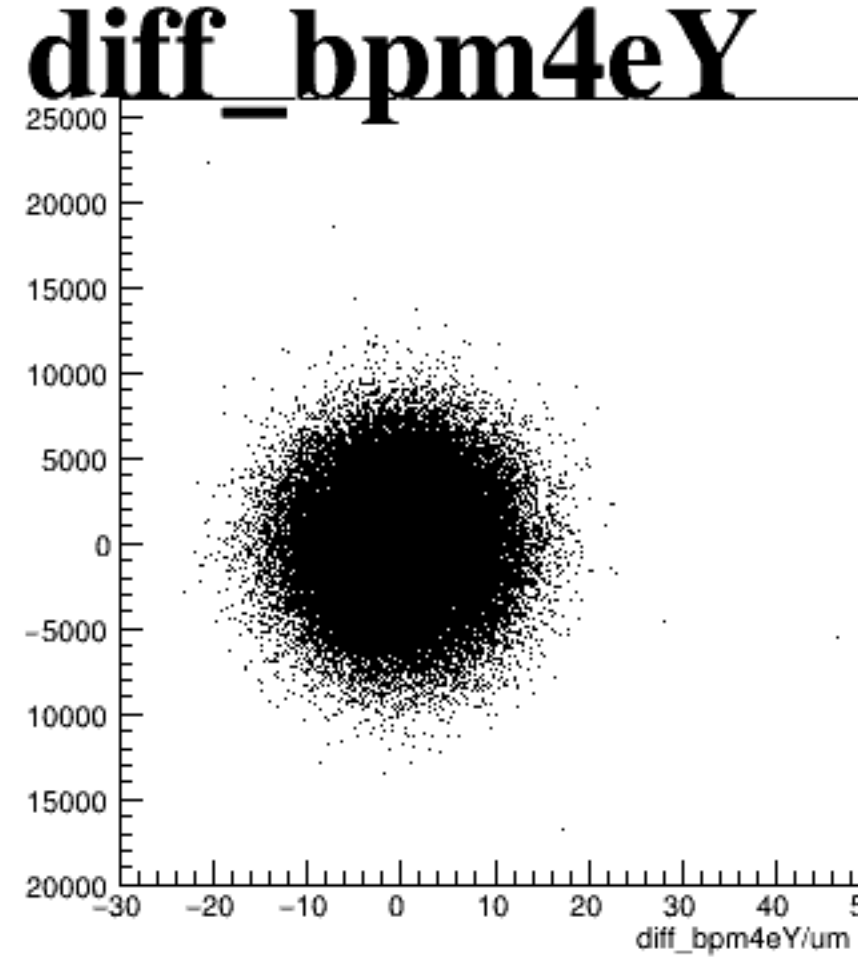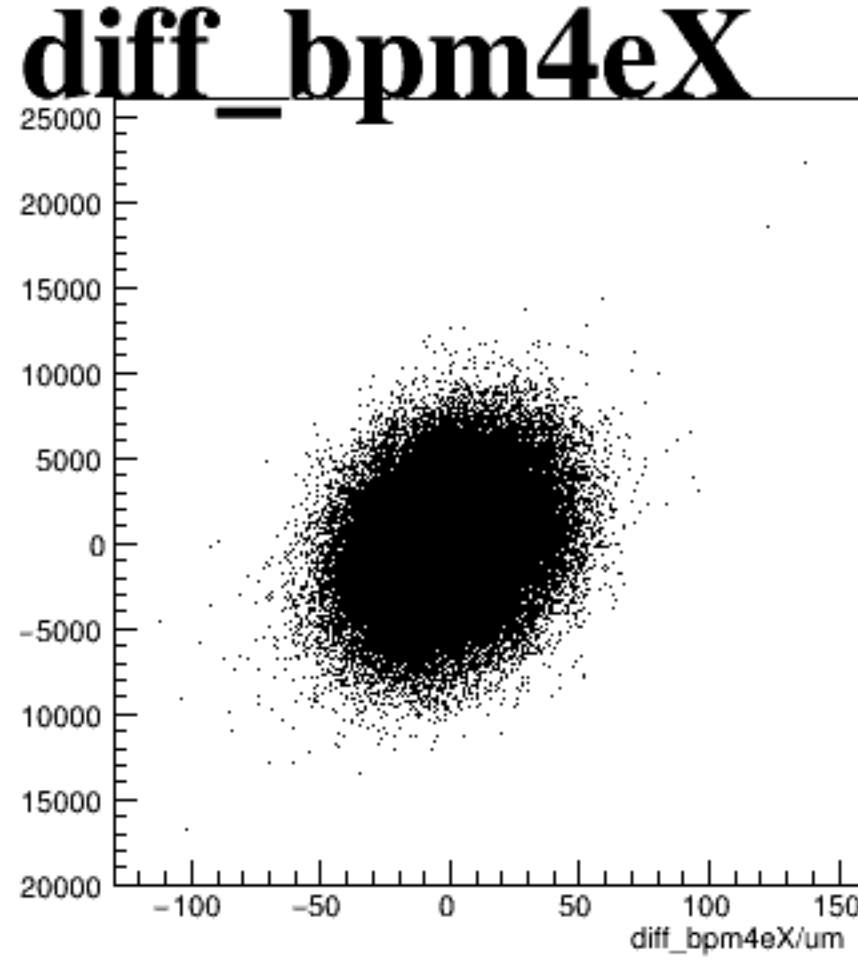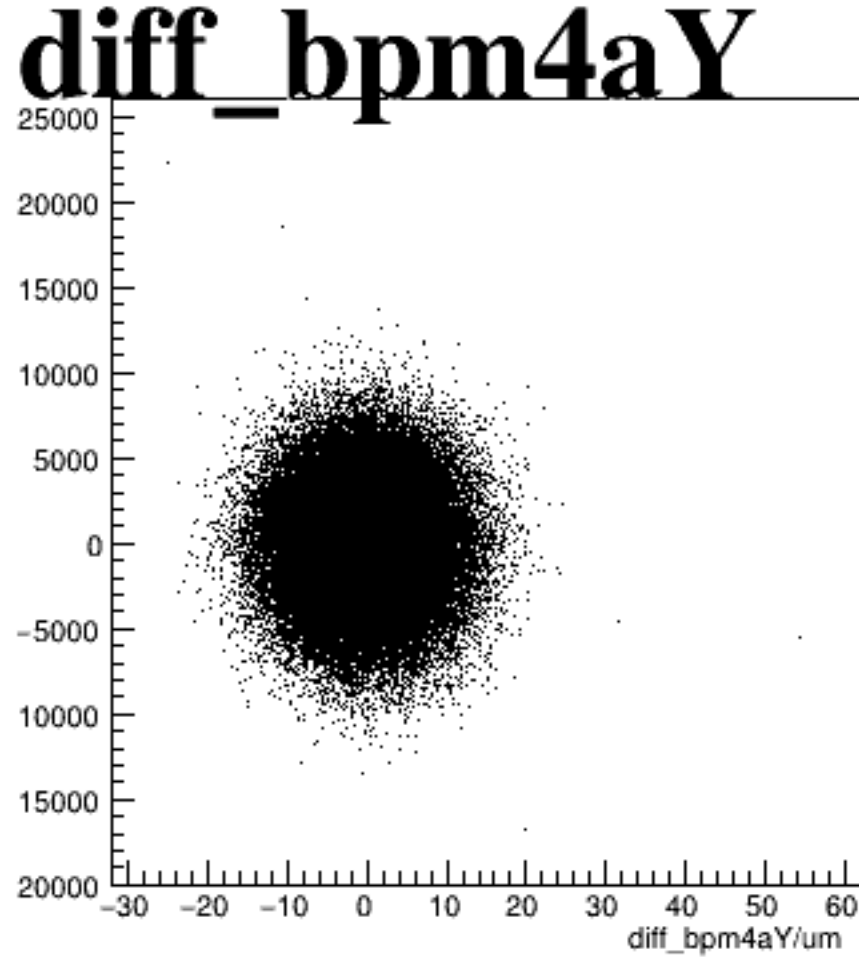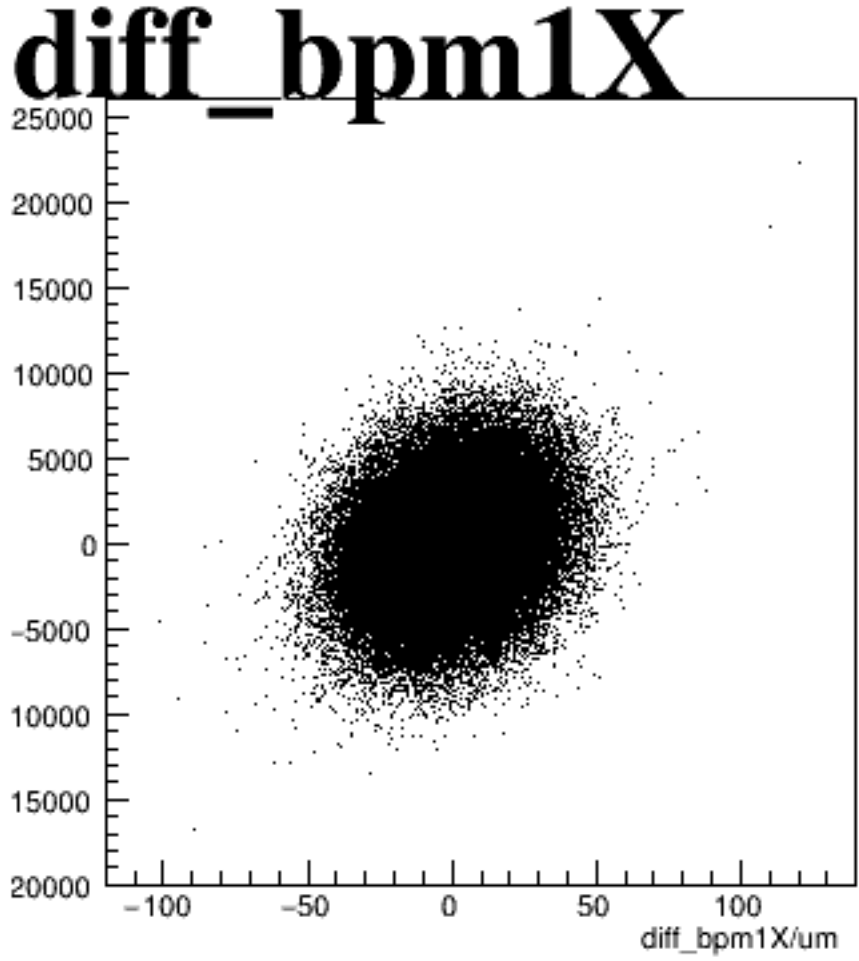

asym_atl2

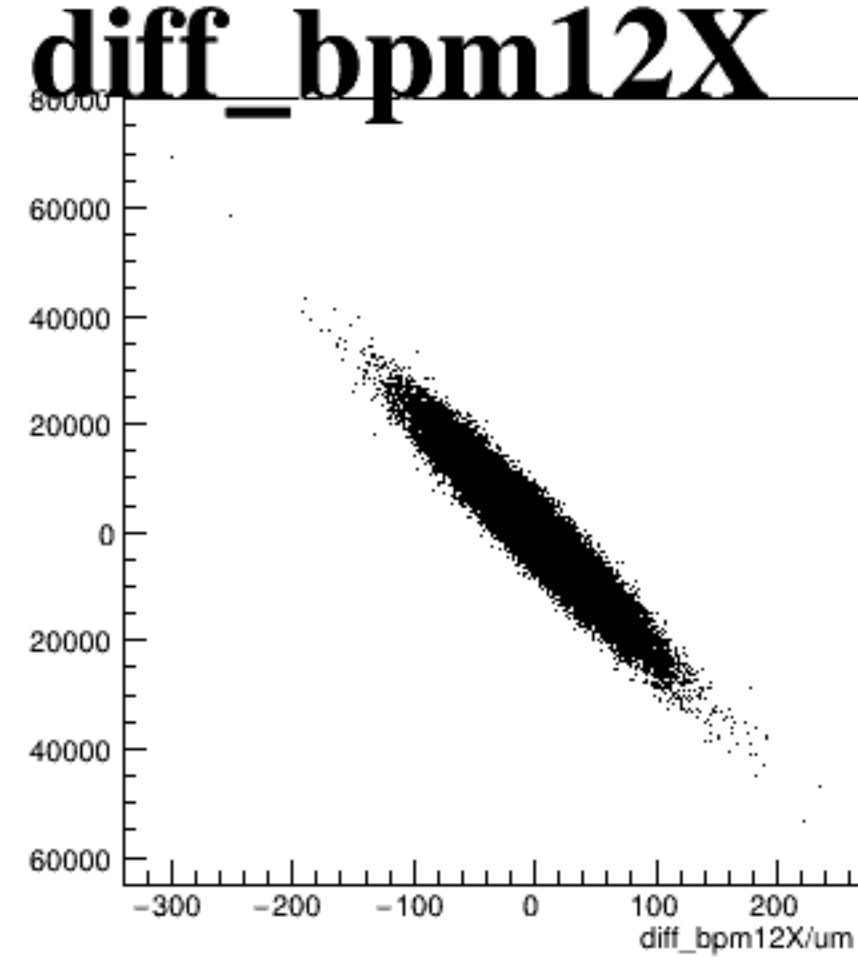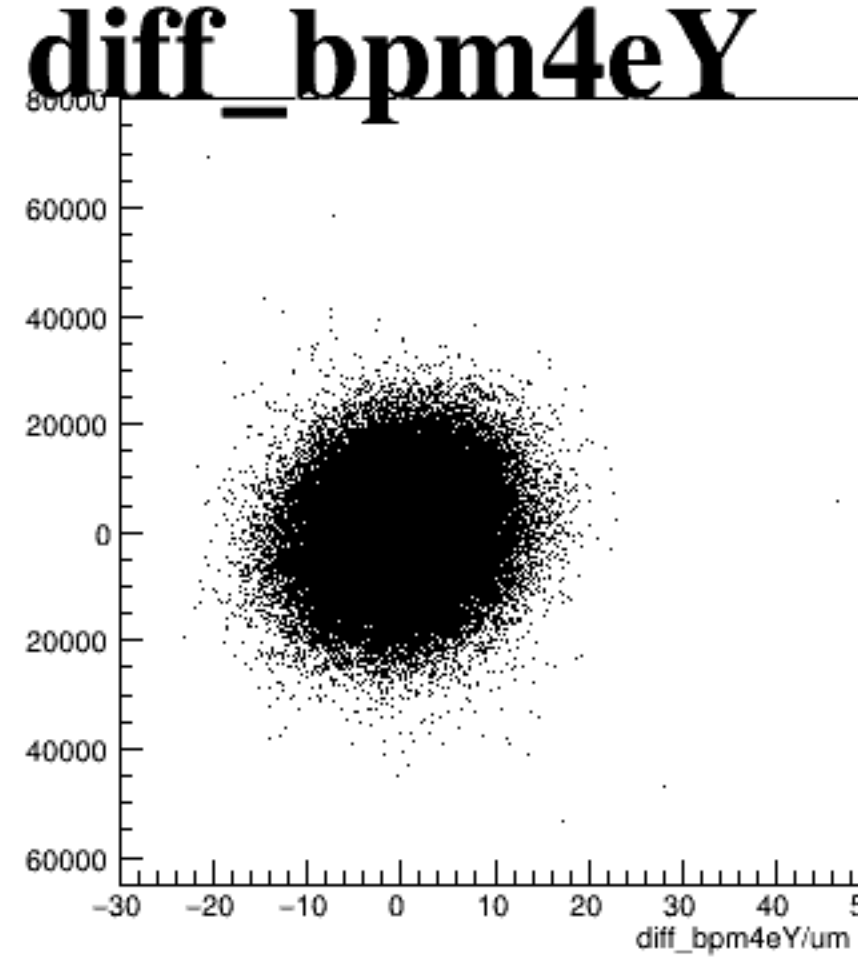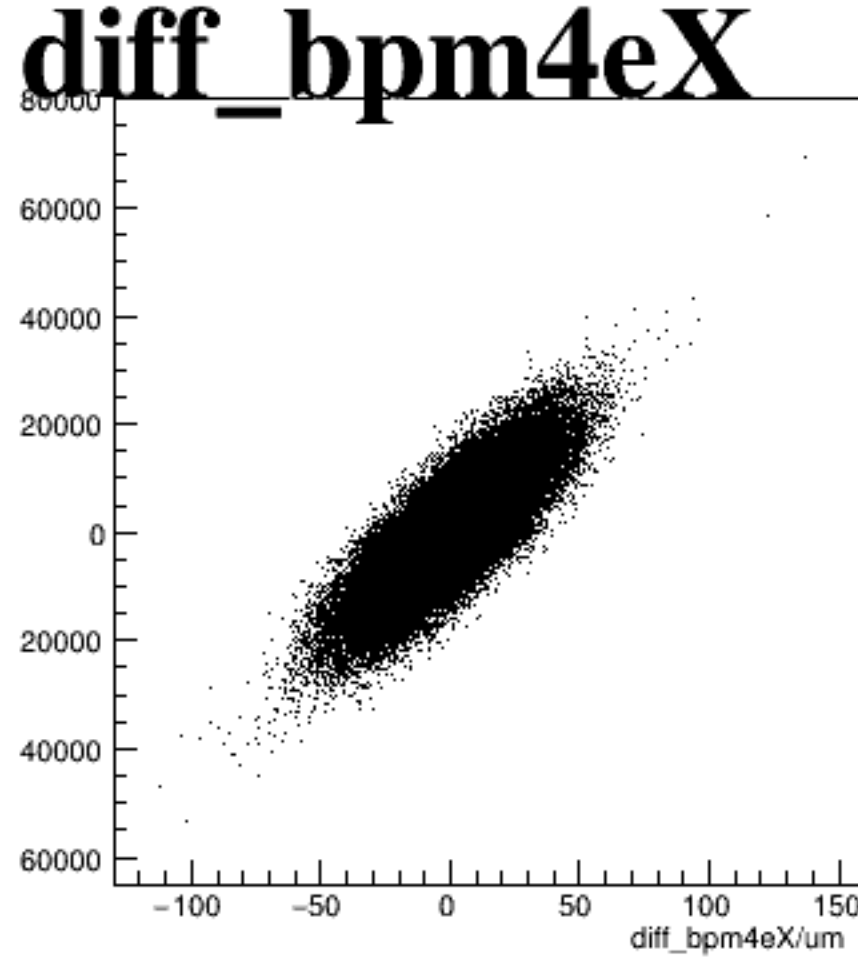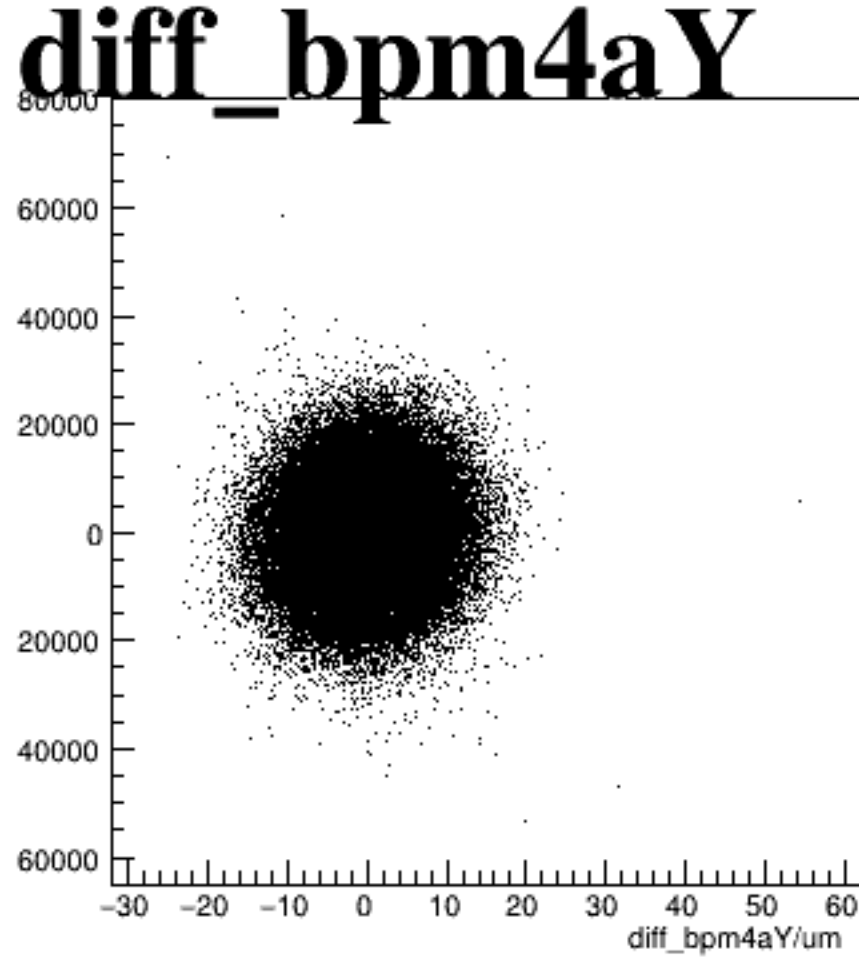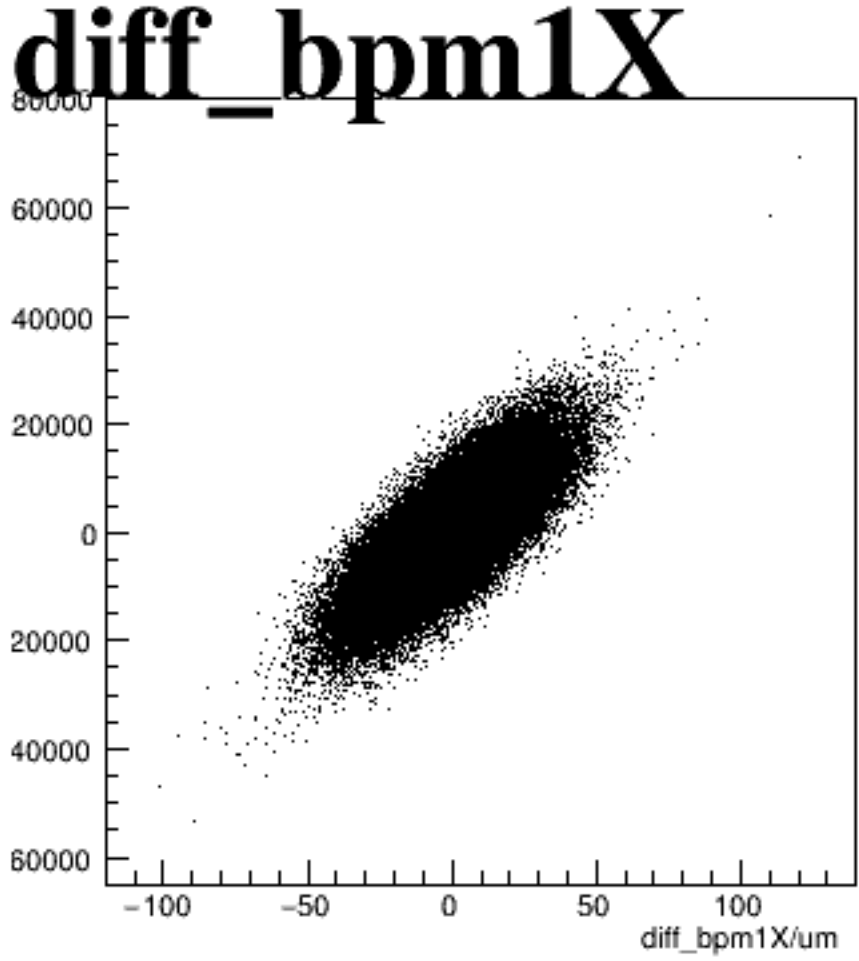

asym_atr2

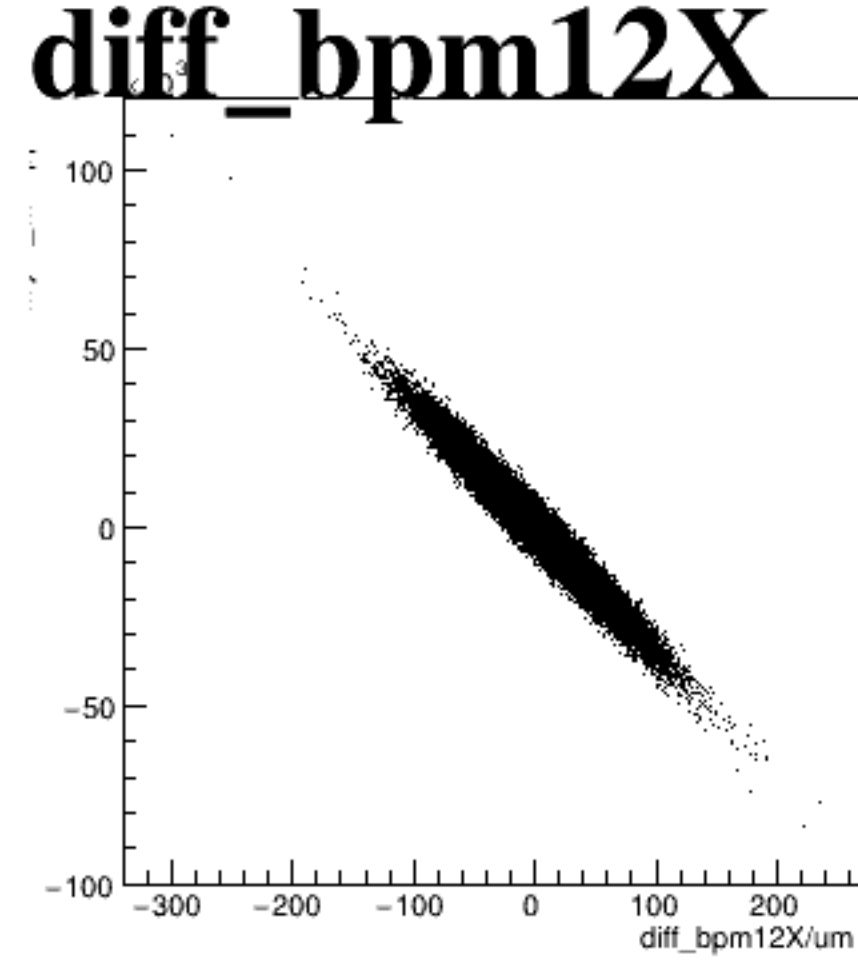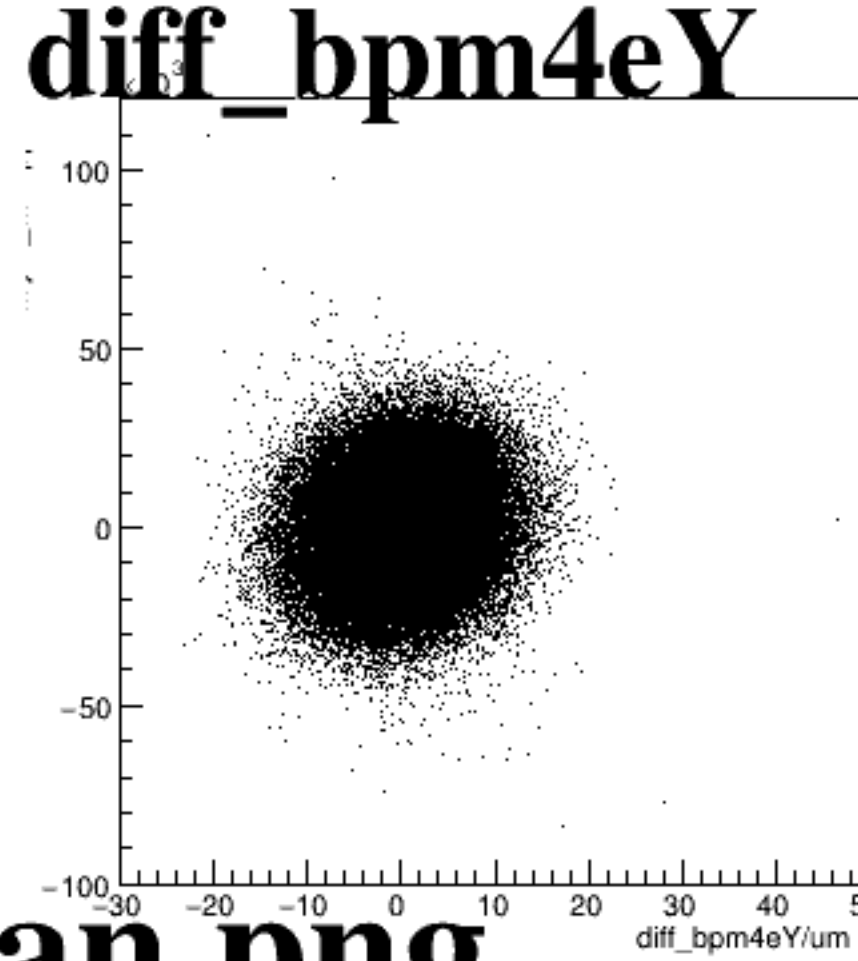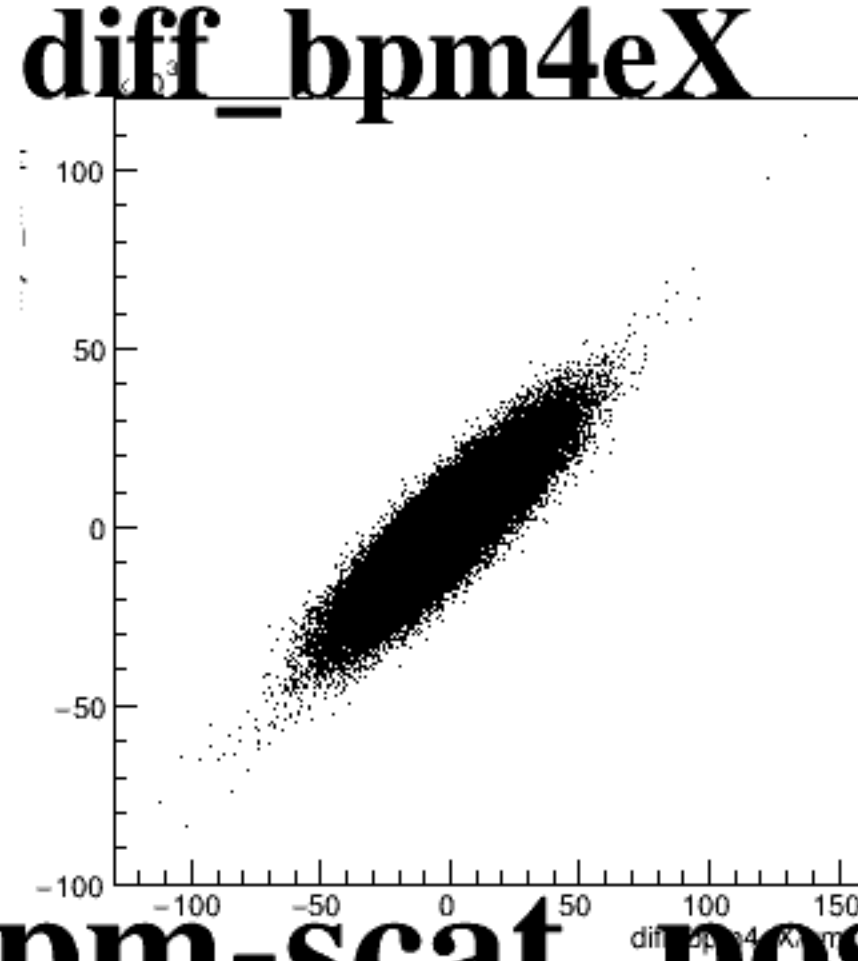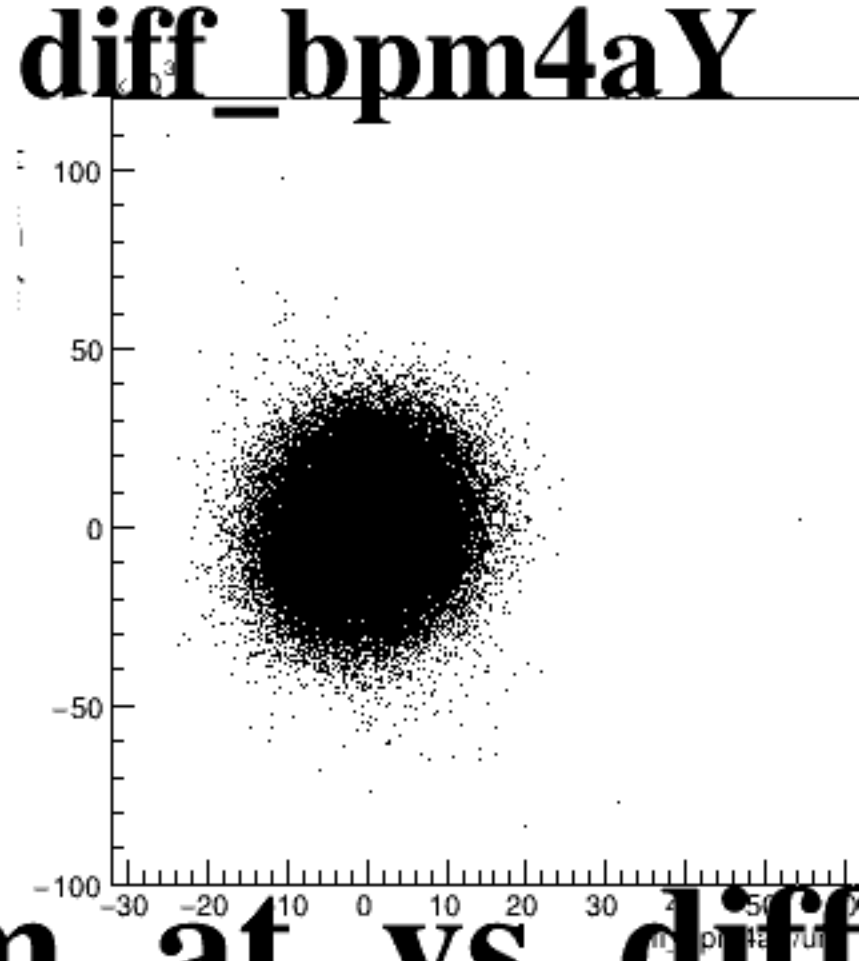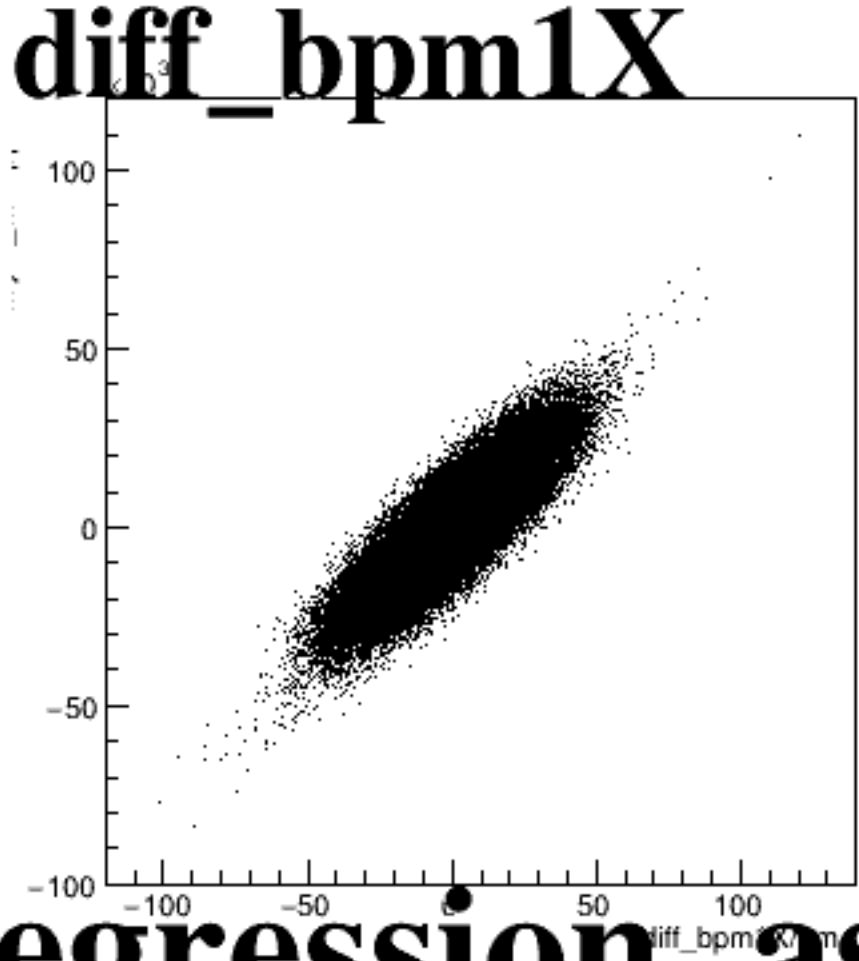

The figure displays five scatter plots, each showing the difference in BPM (diff_bpm) for various beam parameters. The plots are arranged horizontally. Each plot has a dense, roughly circular distribution of points centered around (0,0). The x-axis represents the difference in BPM for a specific parameter, and the y-axis represents the difference in BPM for another parameter. The plots are labeled: diff_bpm1X, diff_bpm4aY, diff_bpm4eX, diff_bpm4eY, and diff_bpm12X. The axes are labeled with units of um.