




asym_atl1

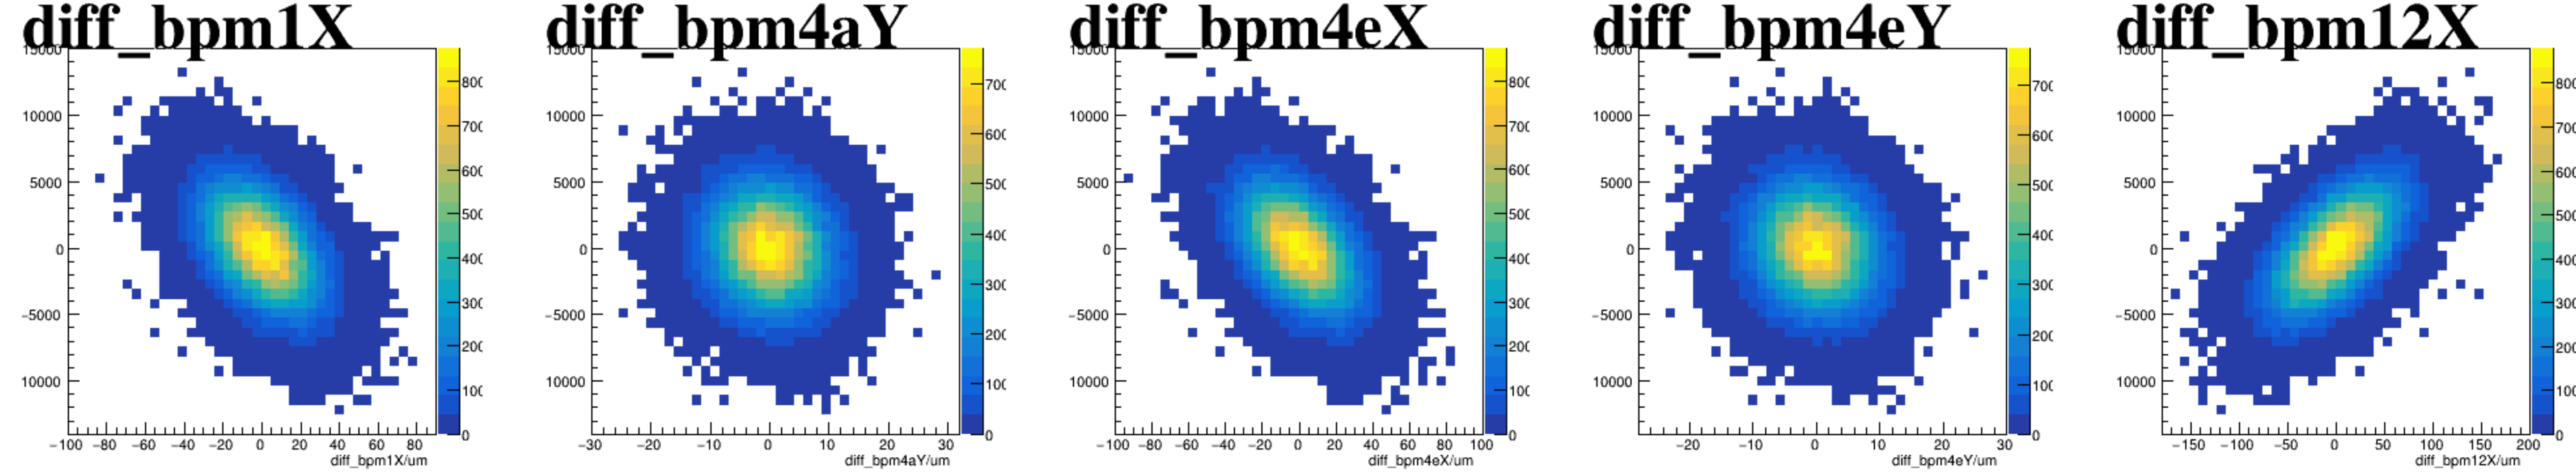


asym_atr1

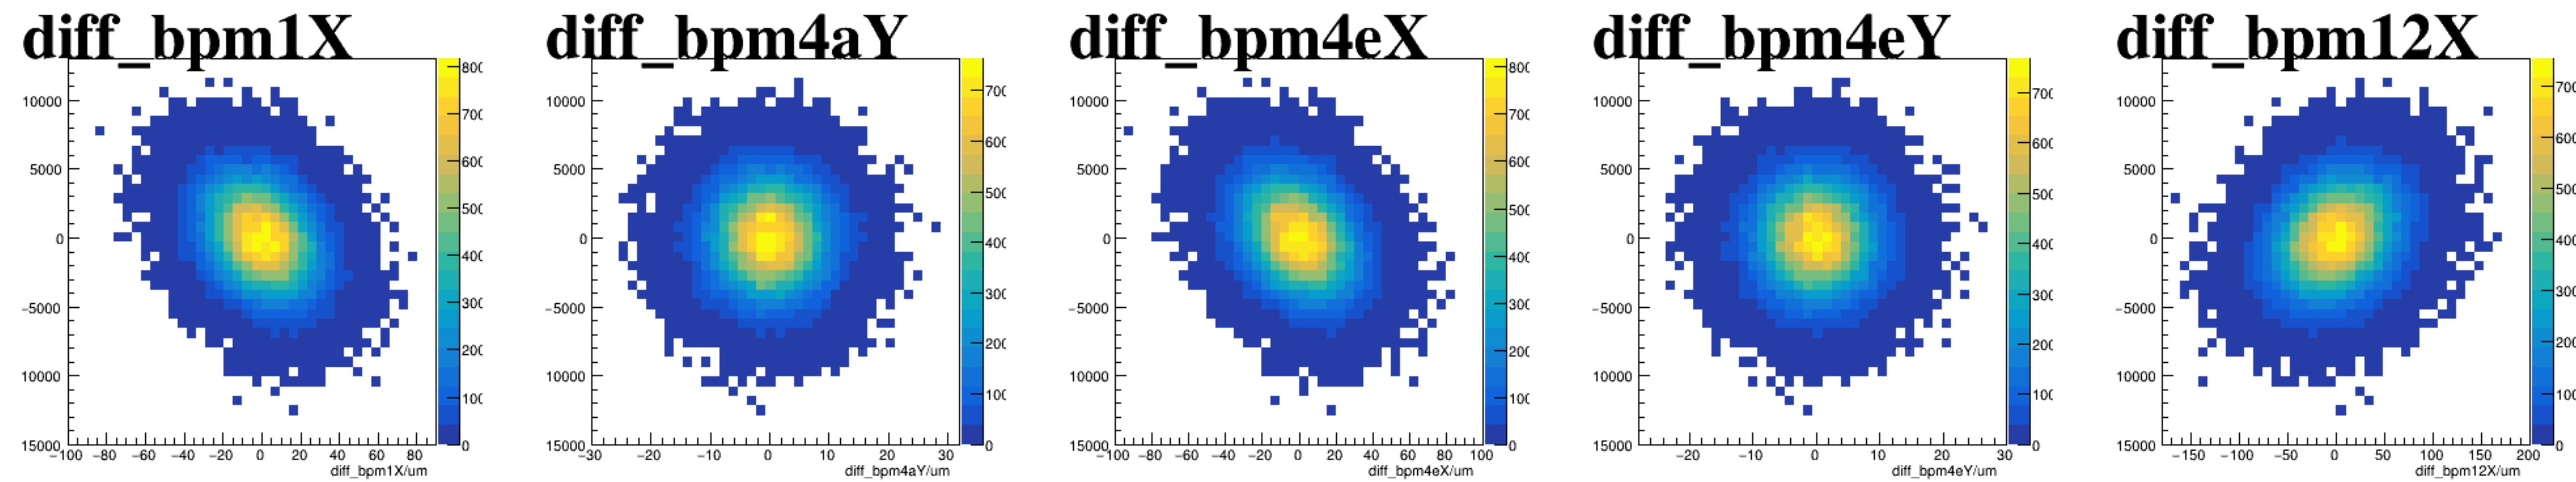


asym_atl2

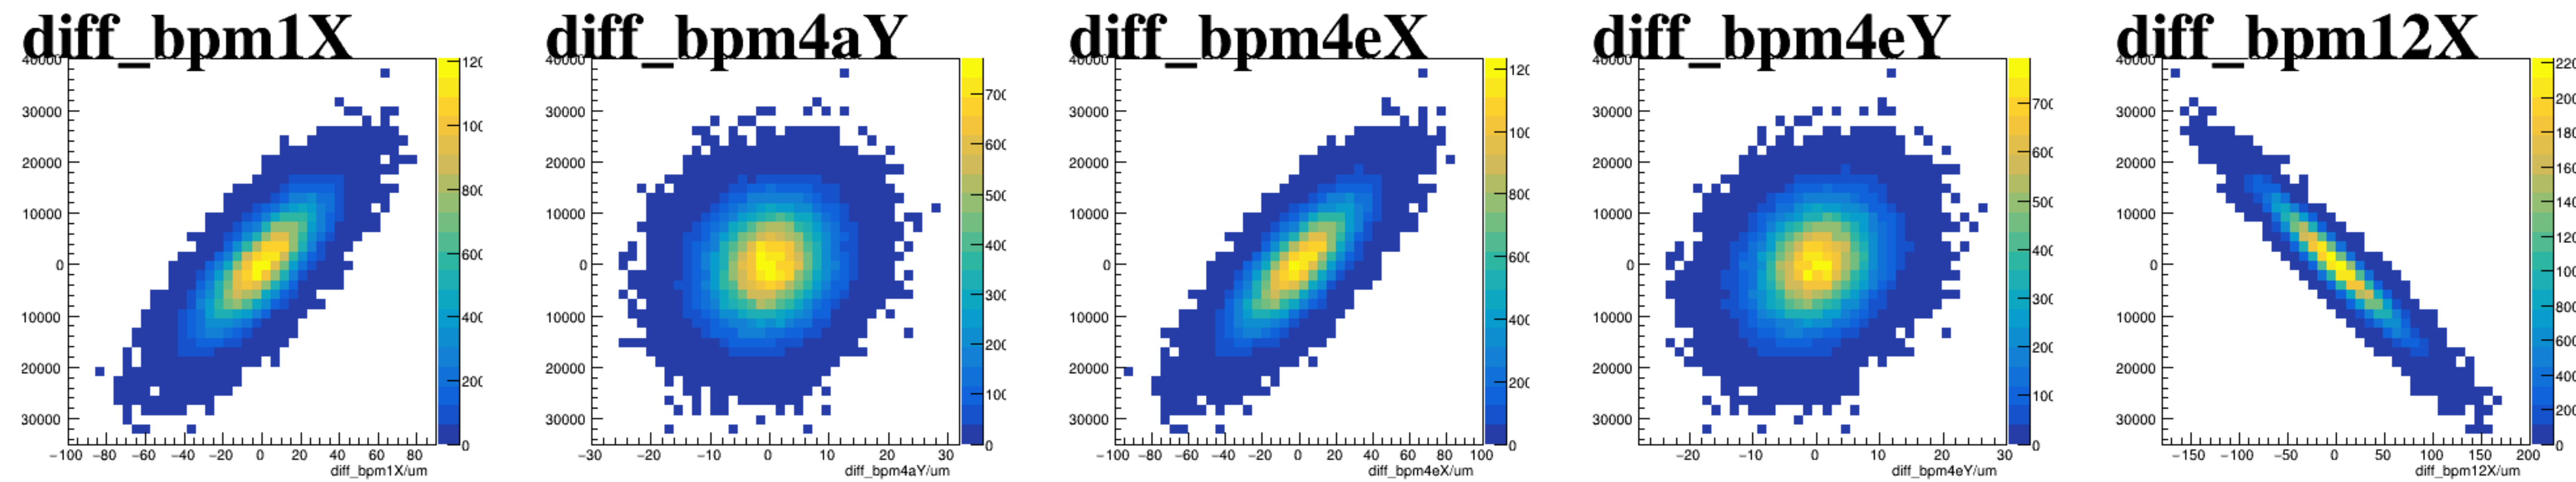


asym_atr2

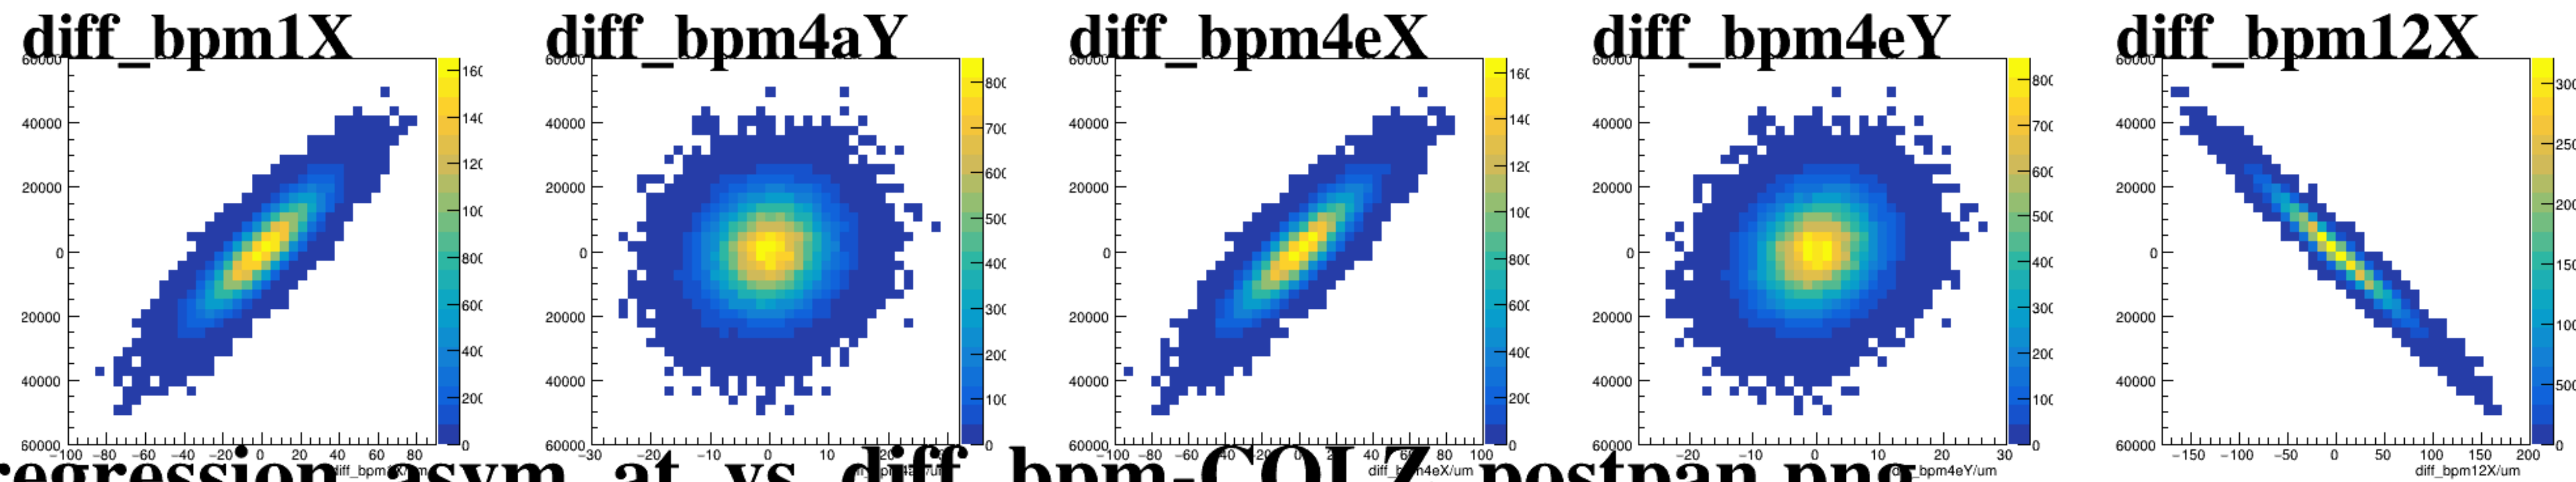


reg_asym_atl1

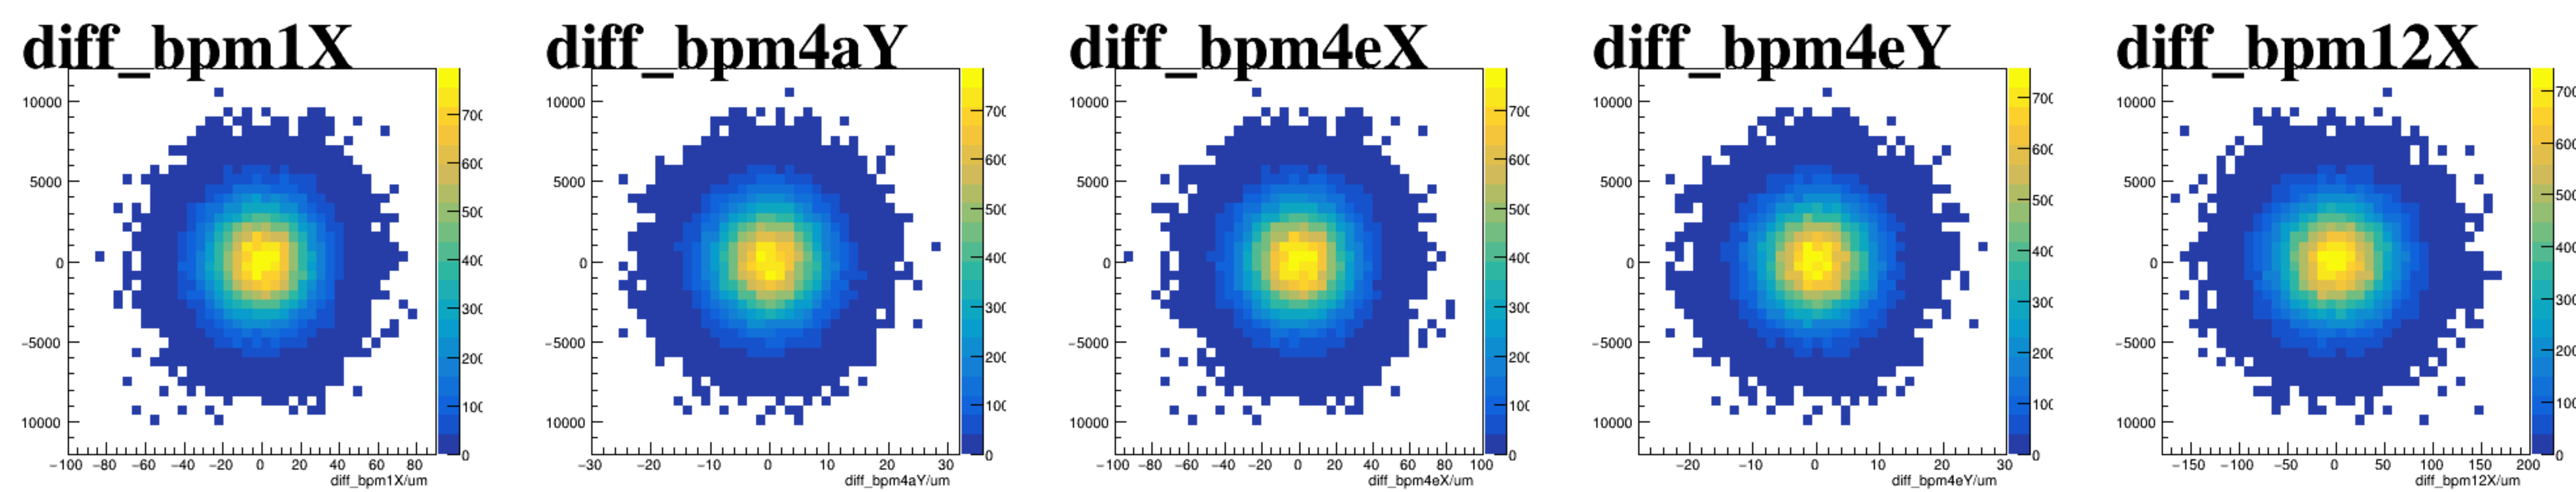


reg_asym_atr1

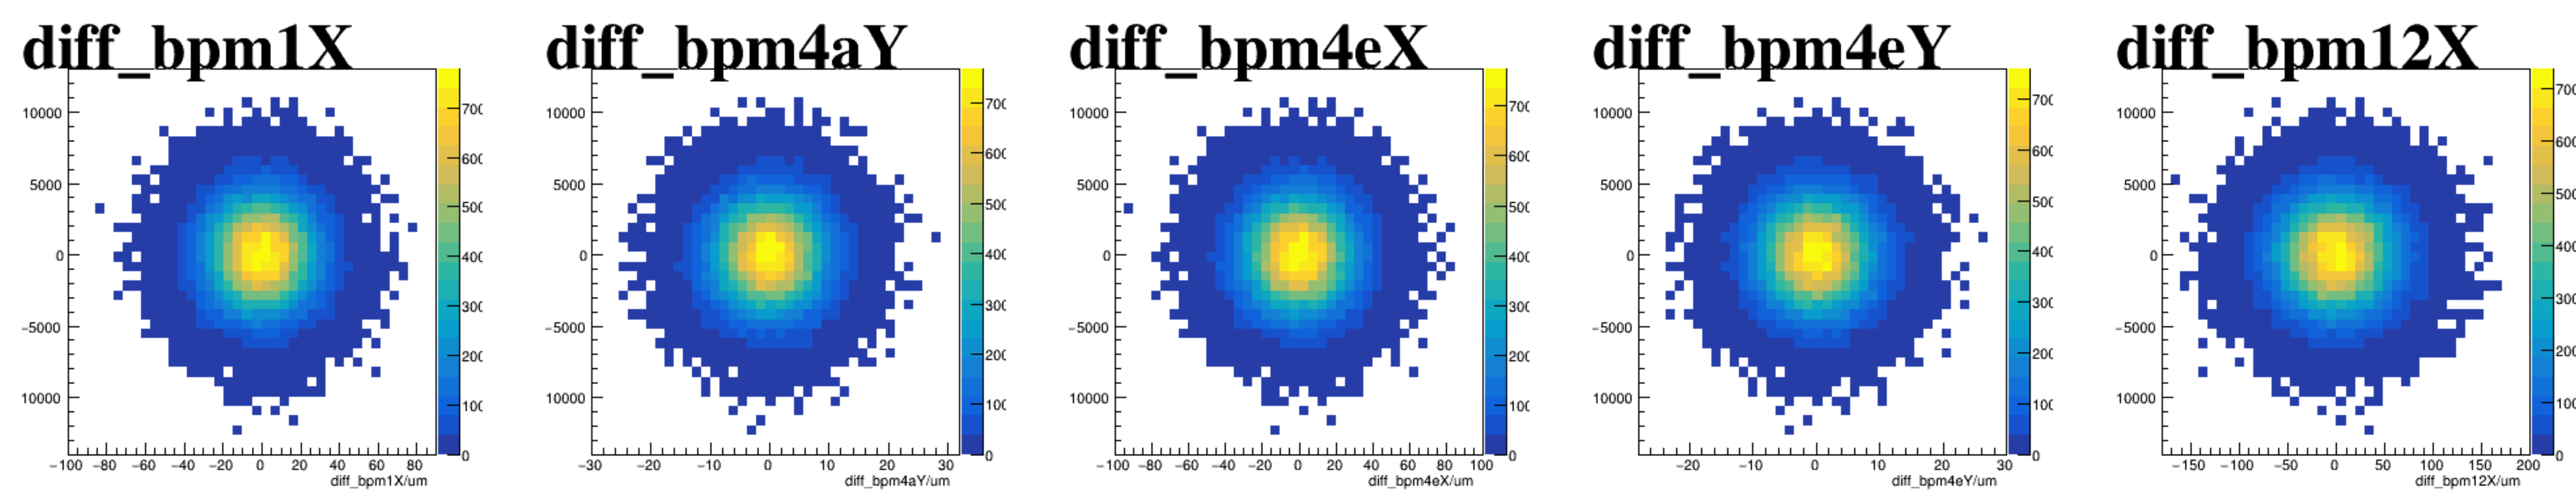






reg_asym_atl2

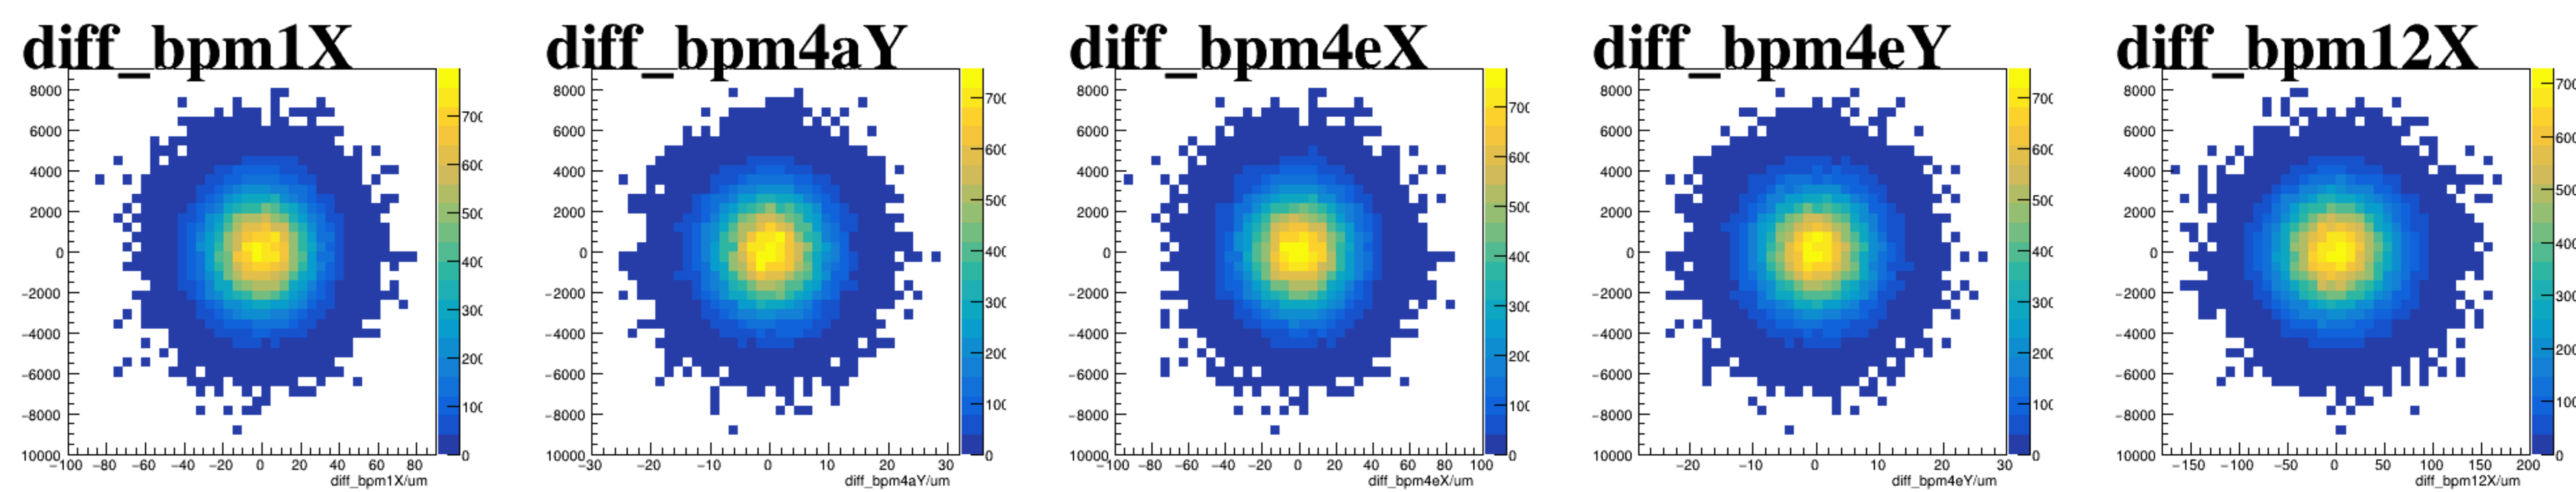






reg_asym_atr2

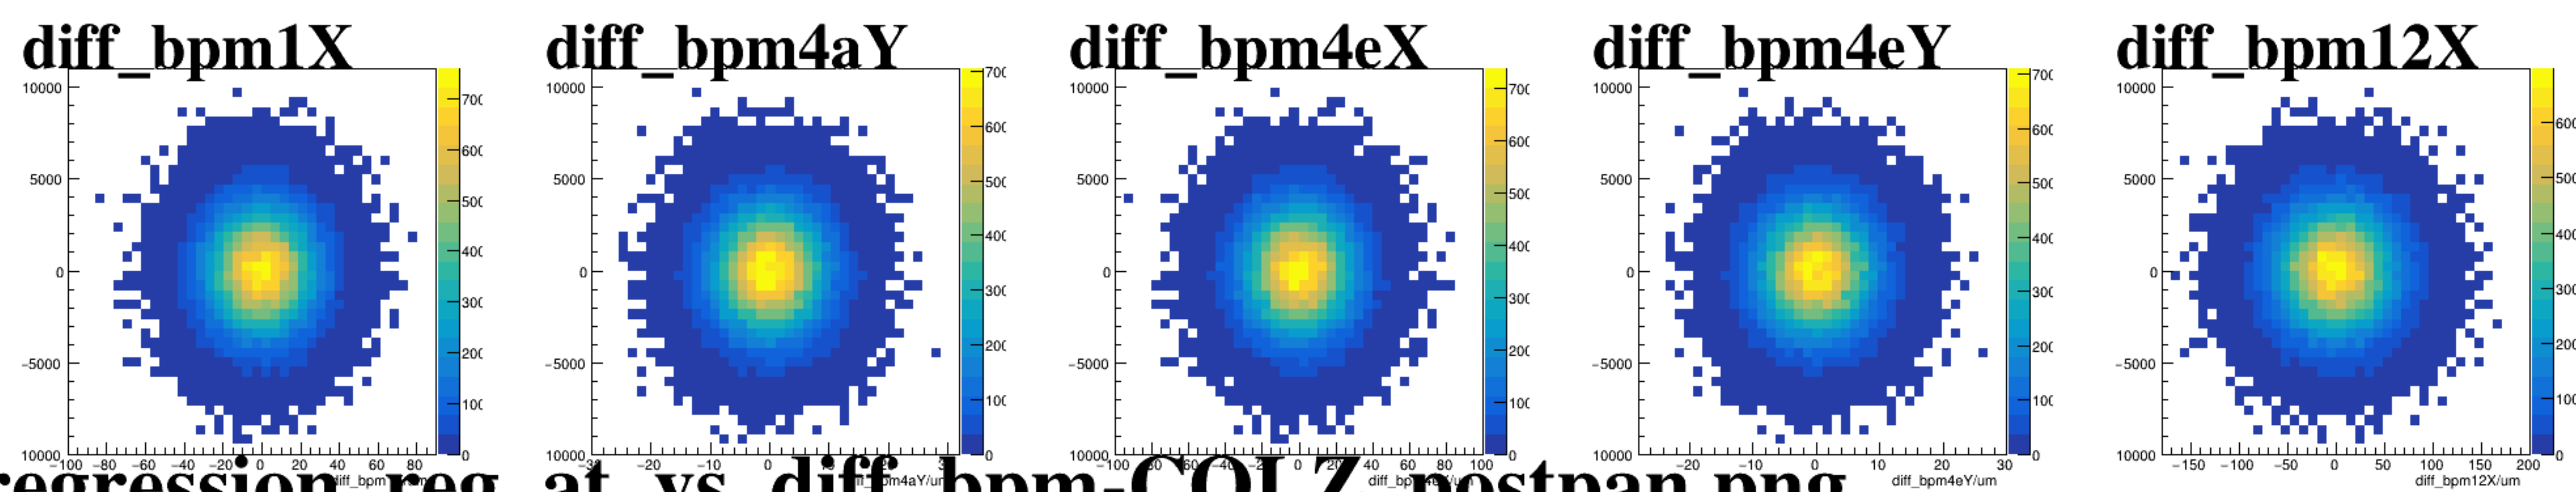






asym_atl1

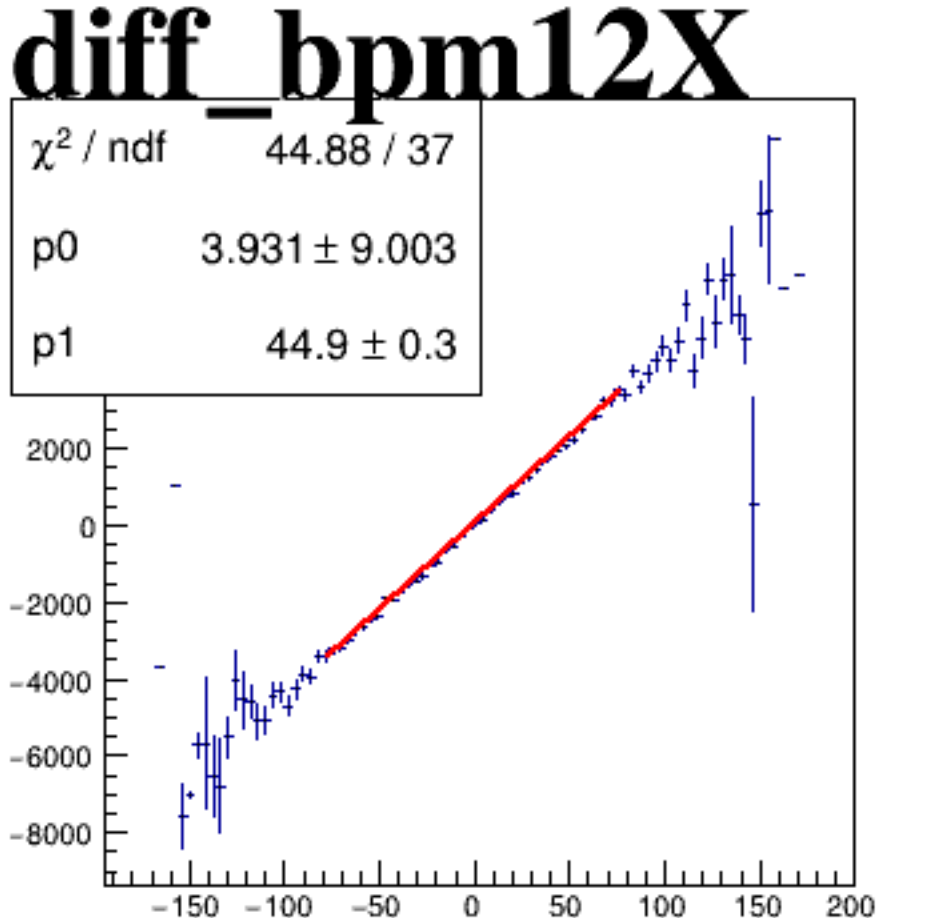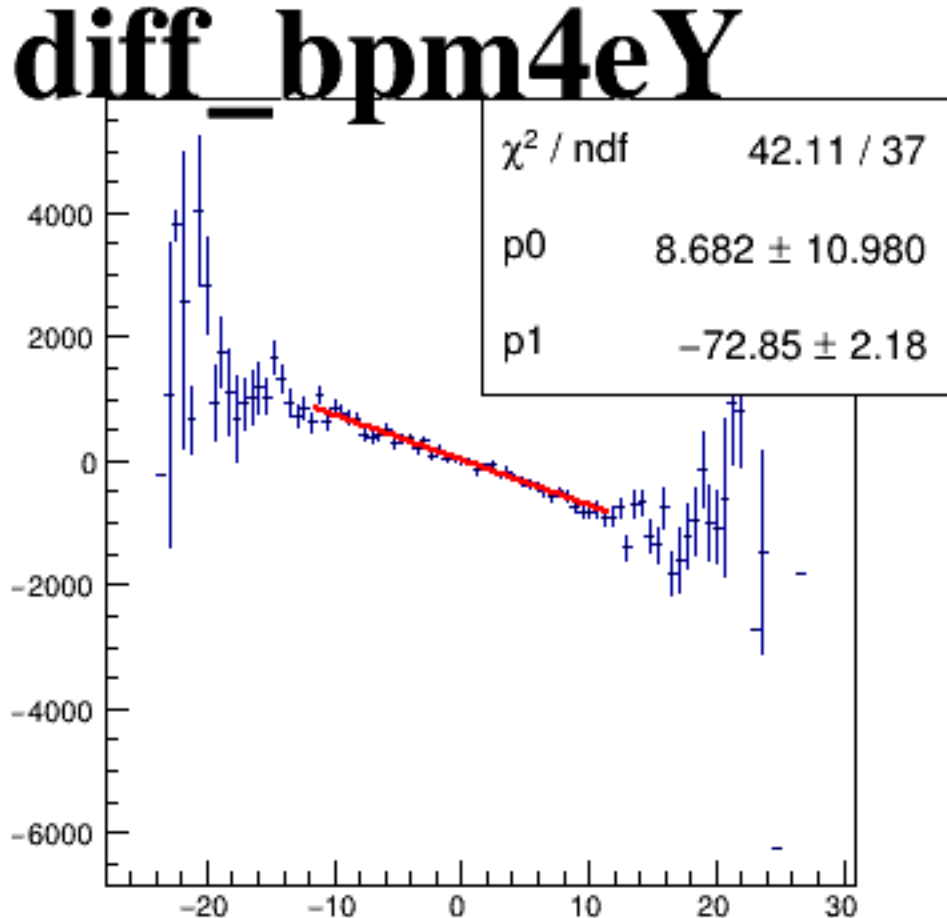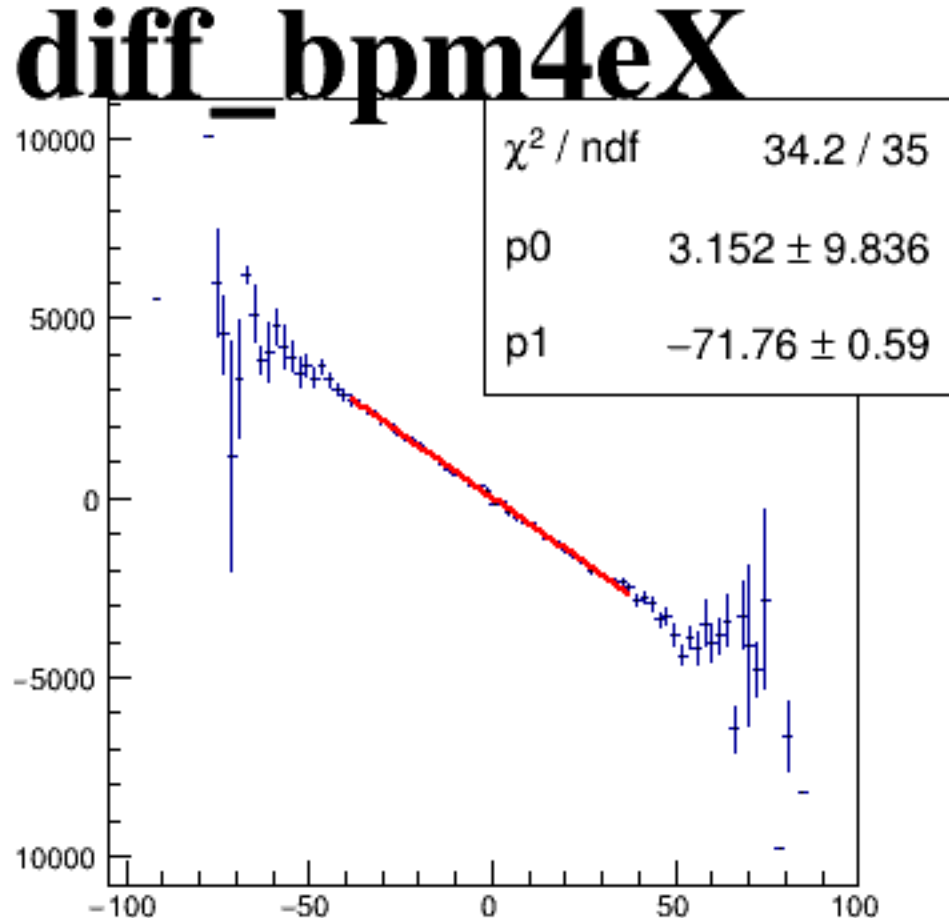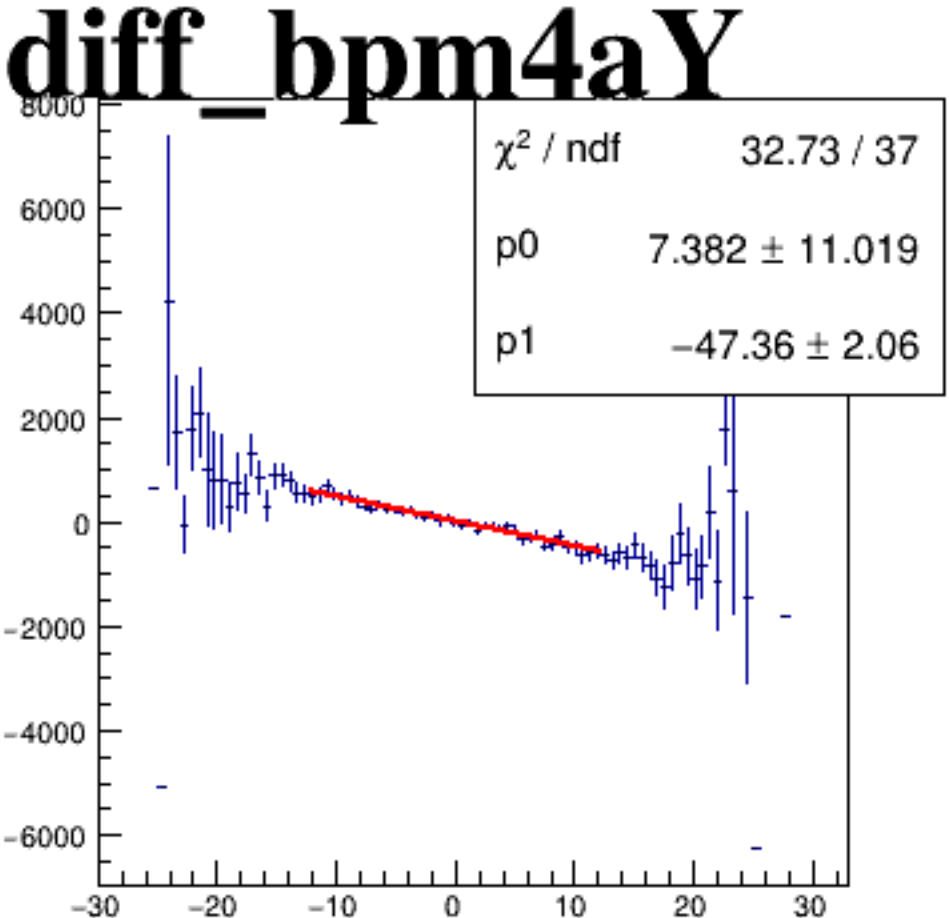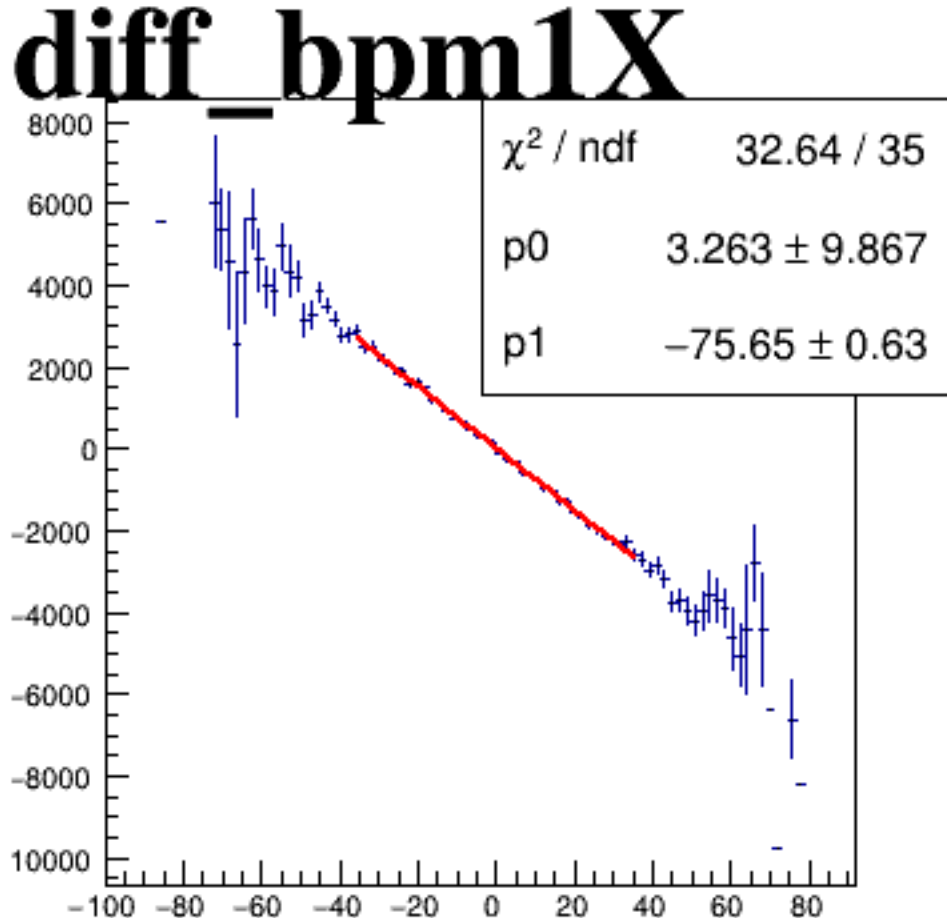






asym_atr1

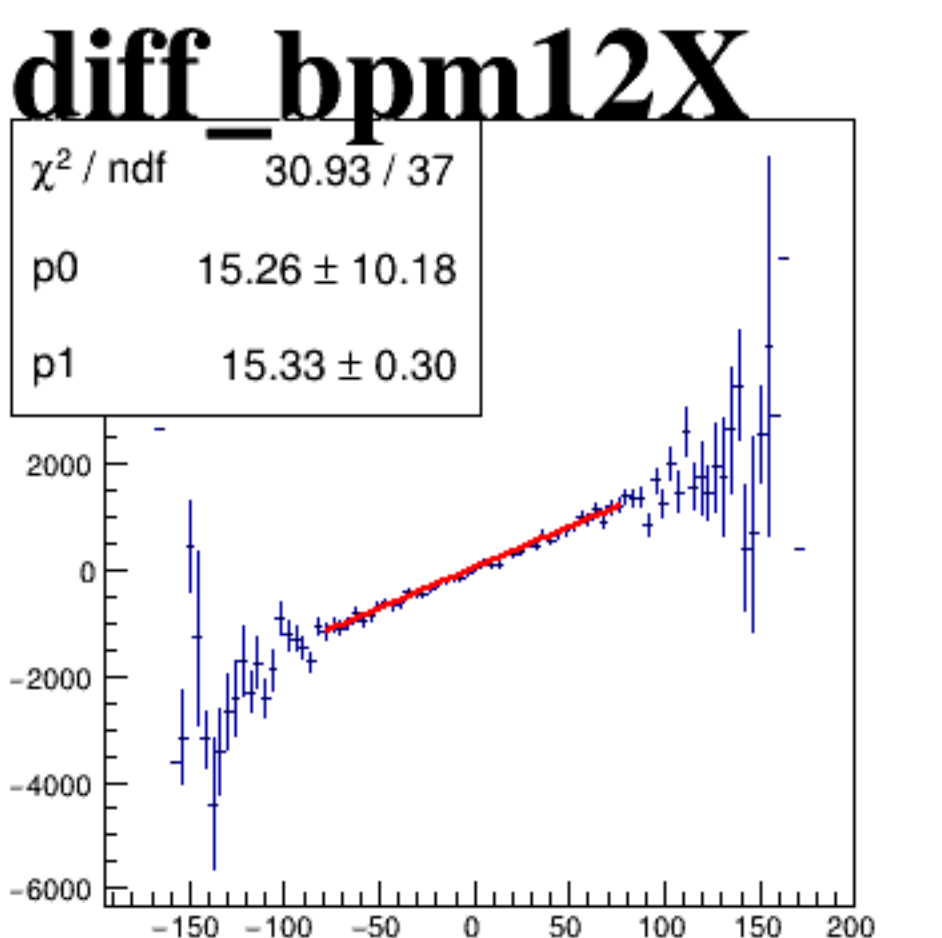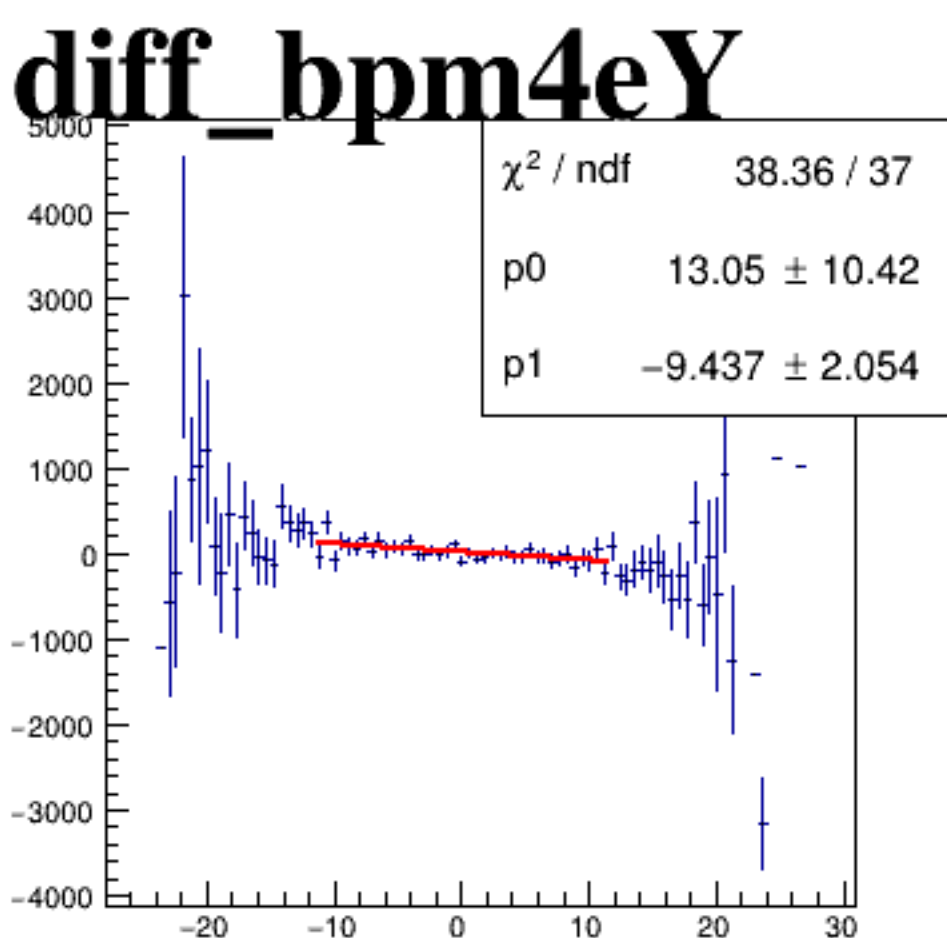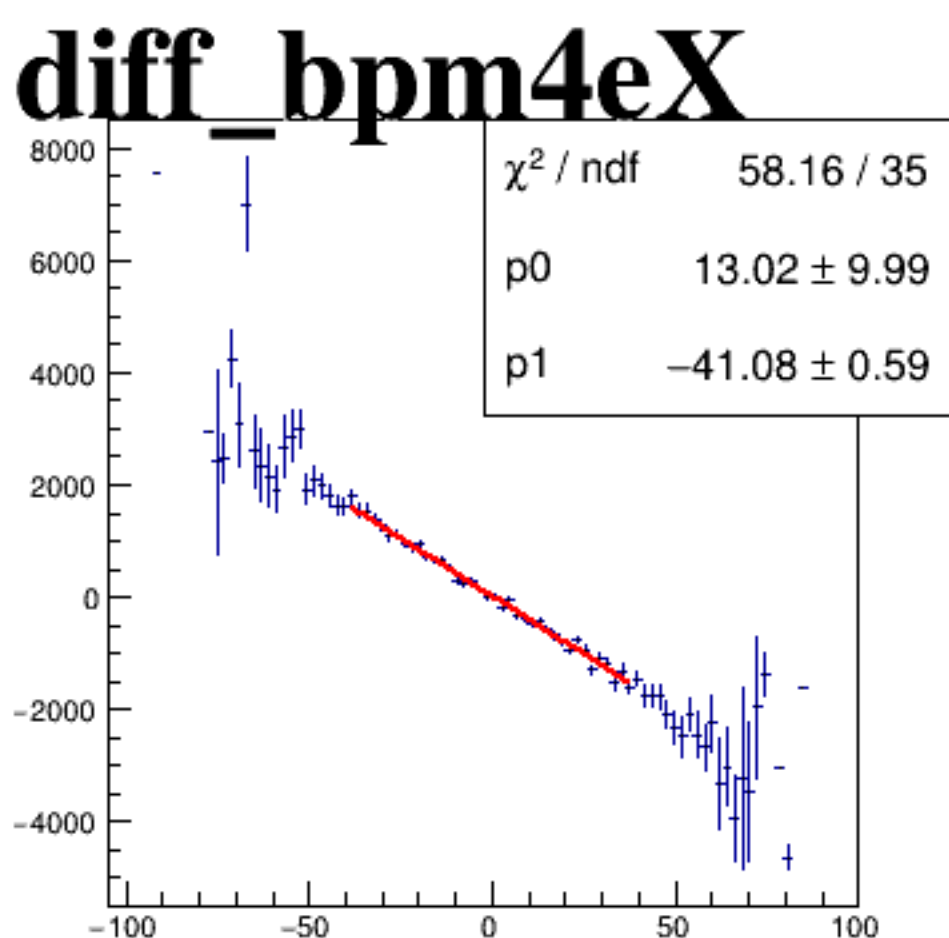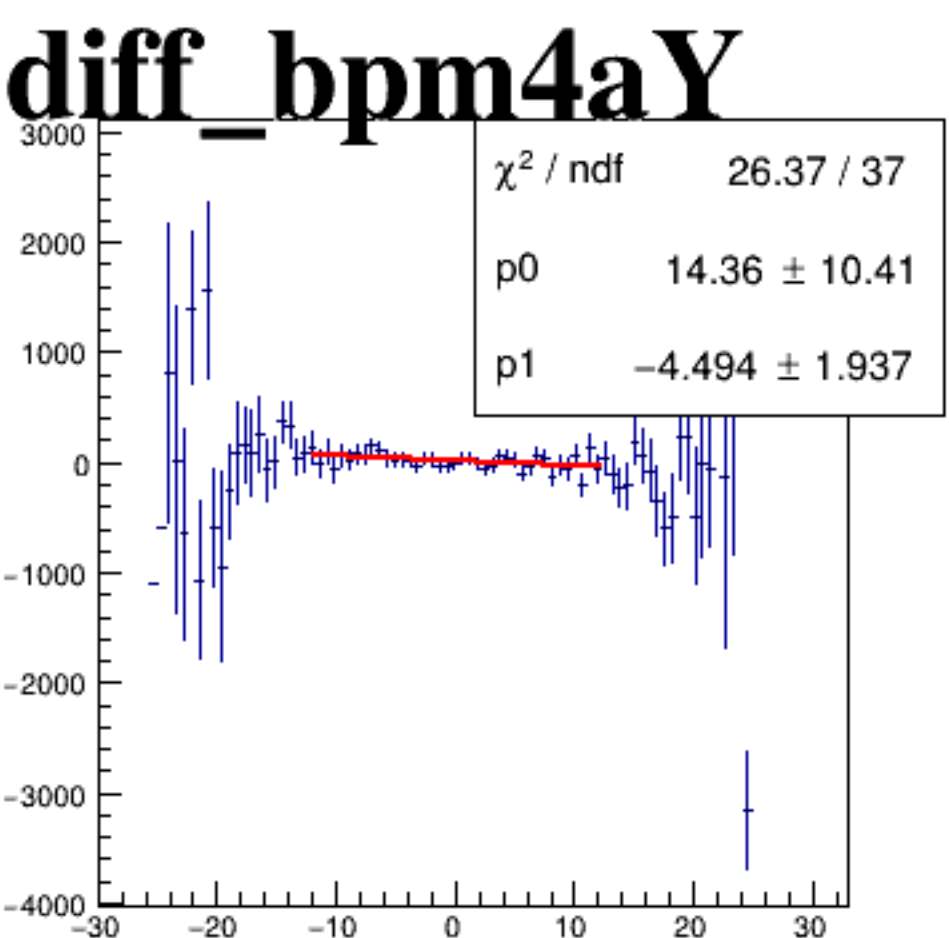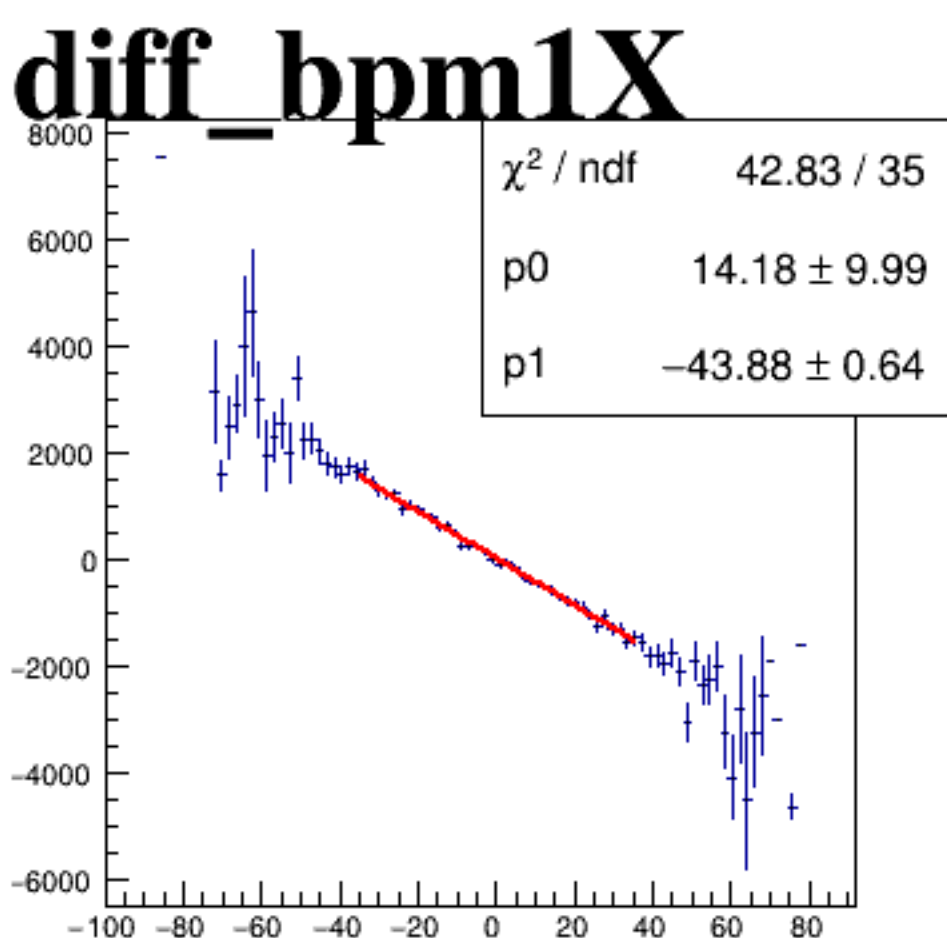


asym_atl2

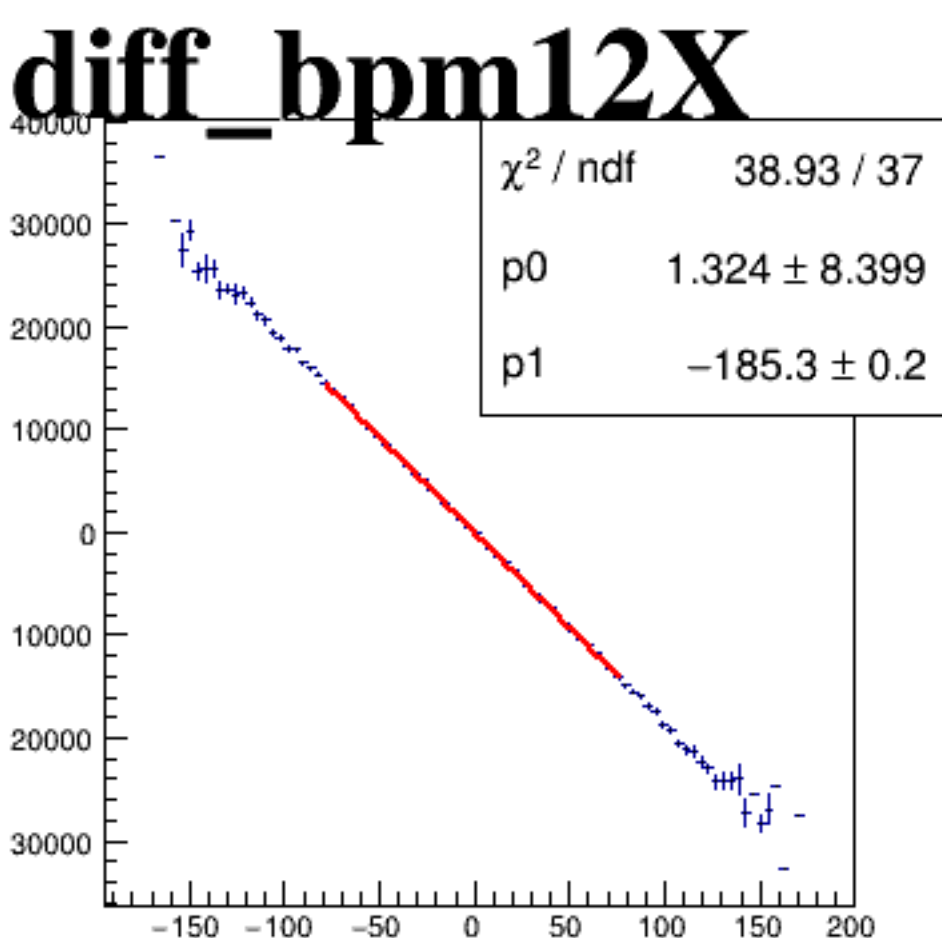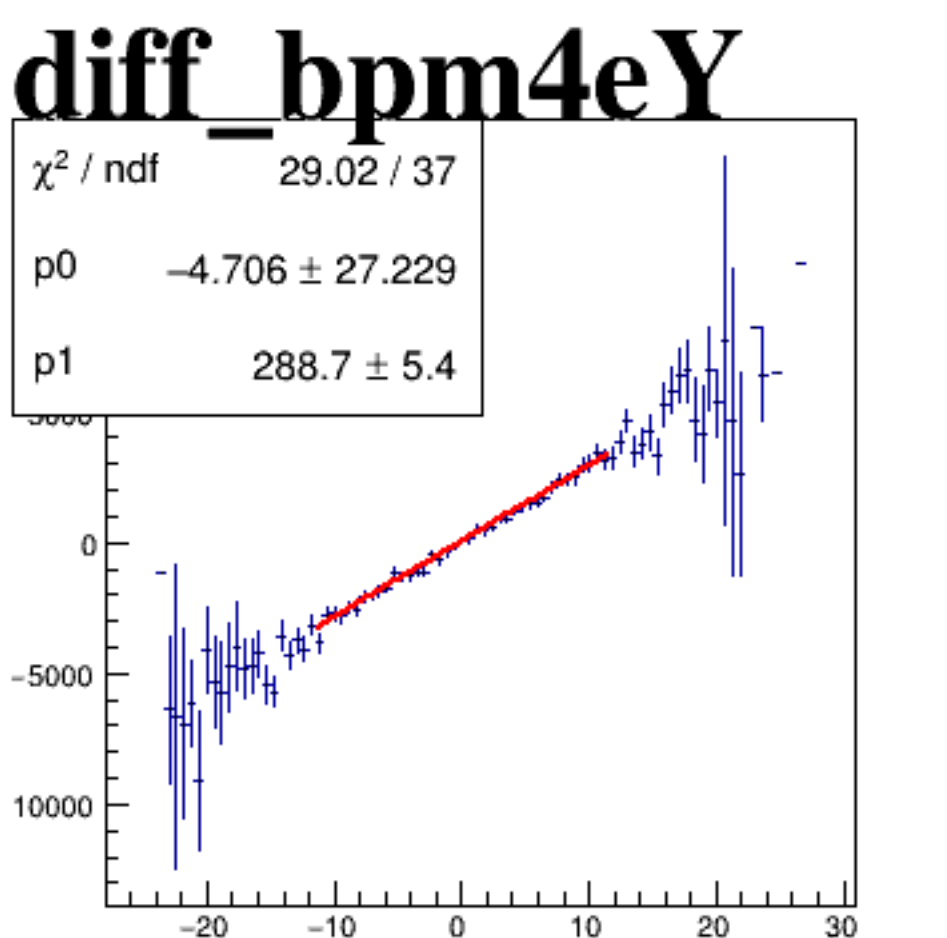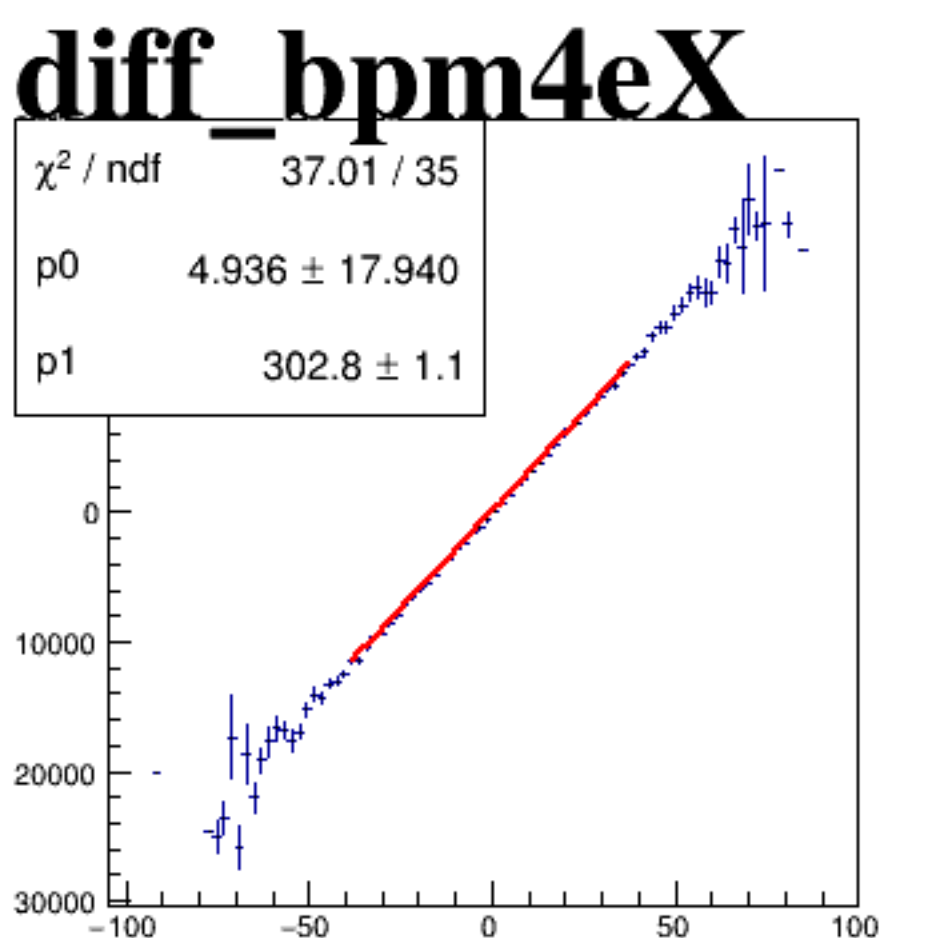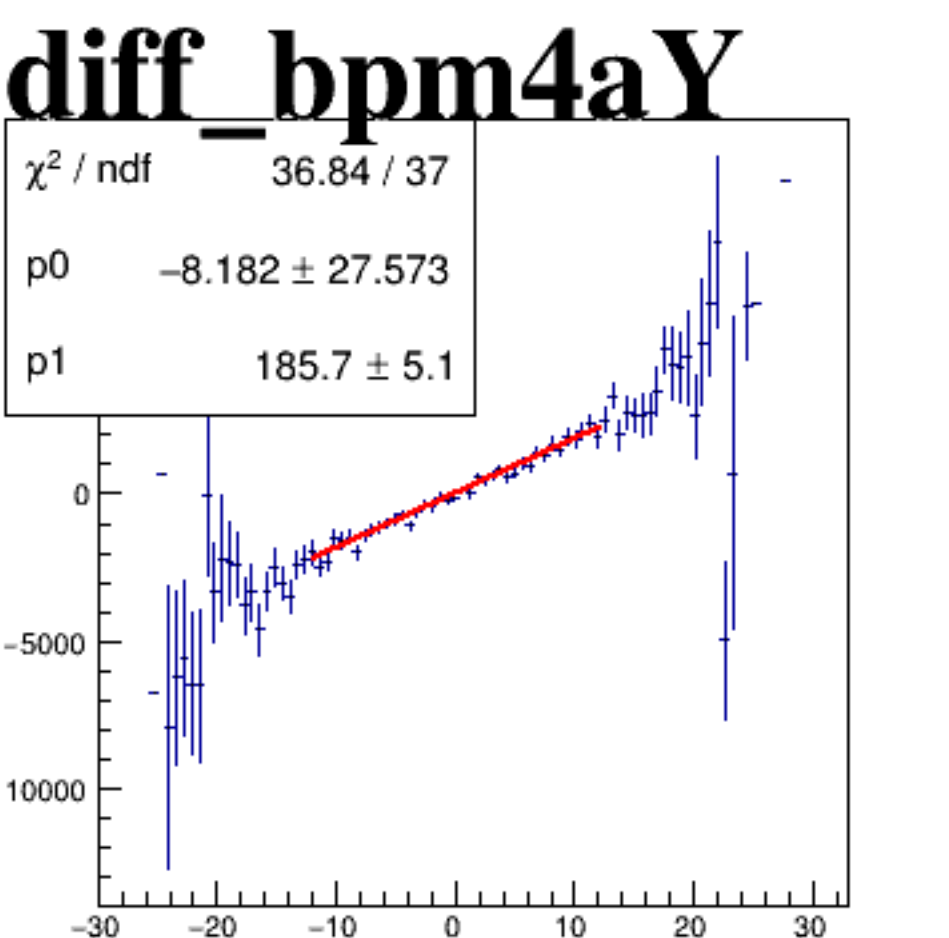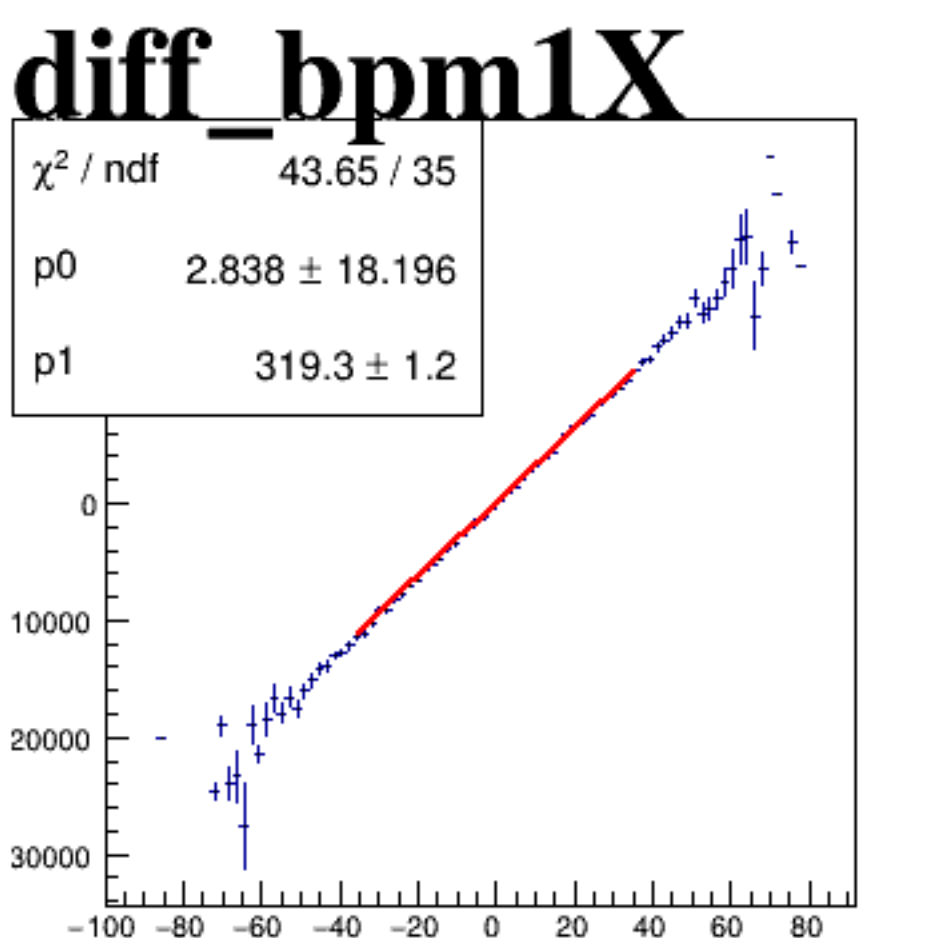


asym_atr2

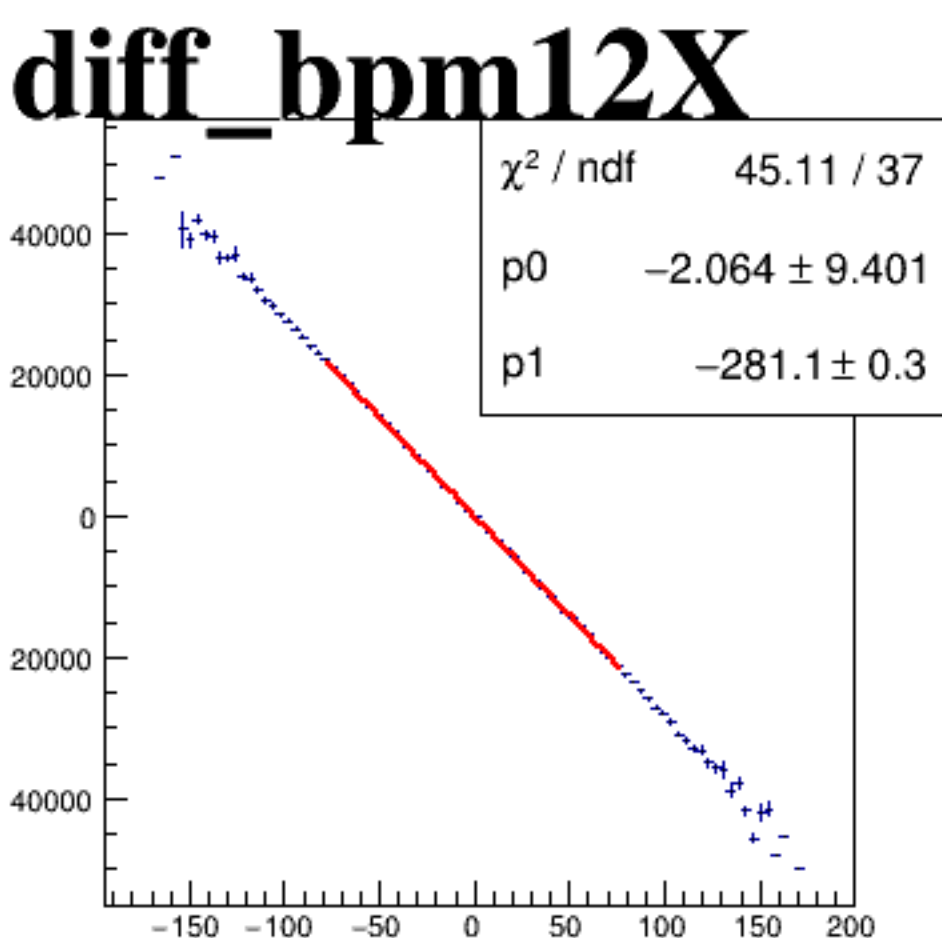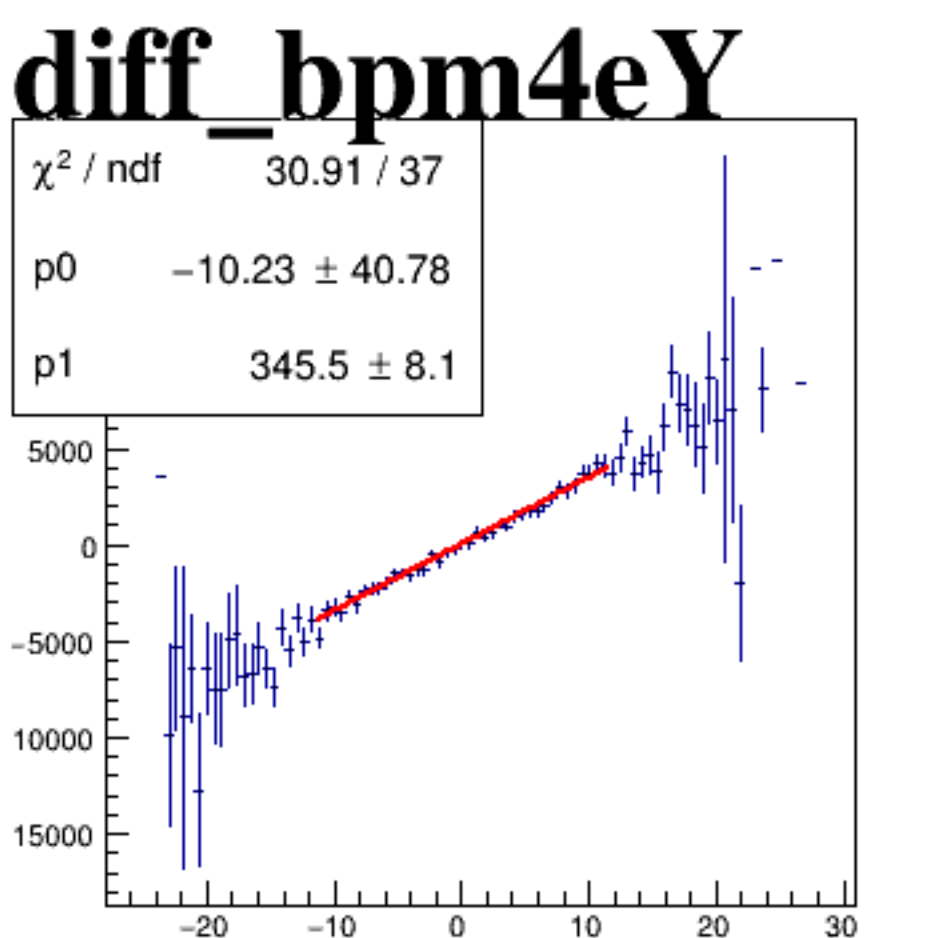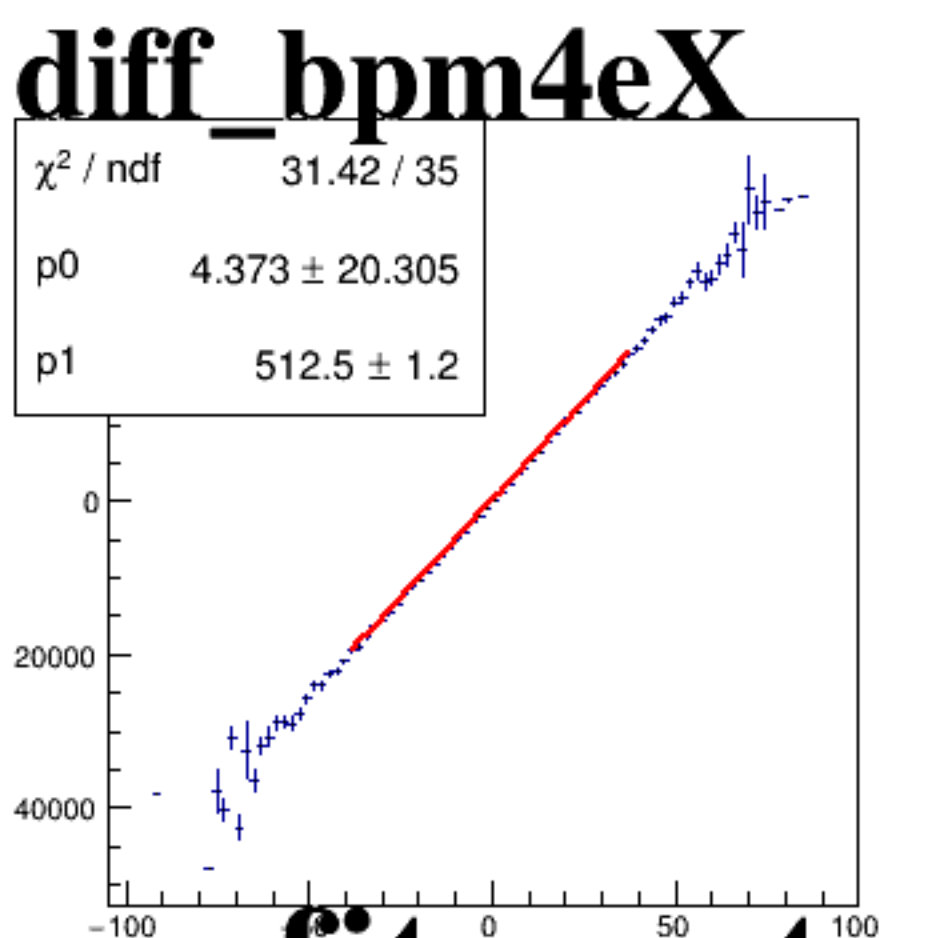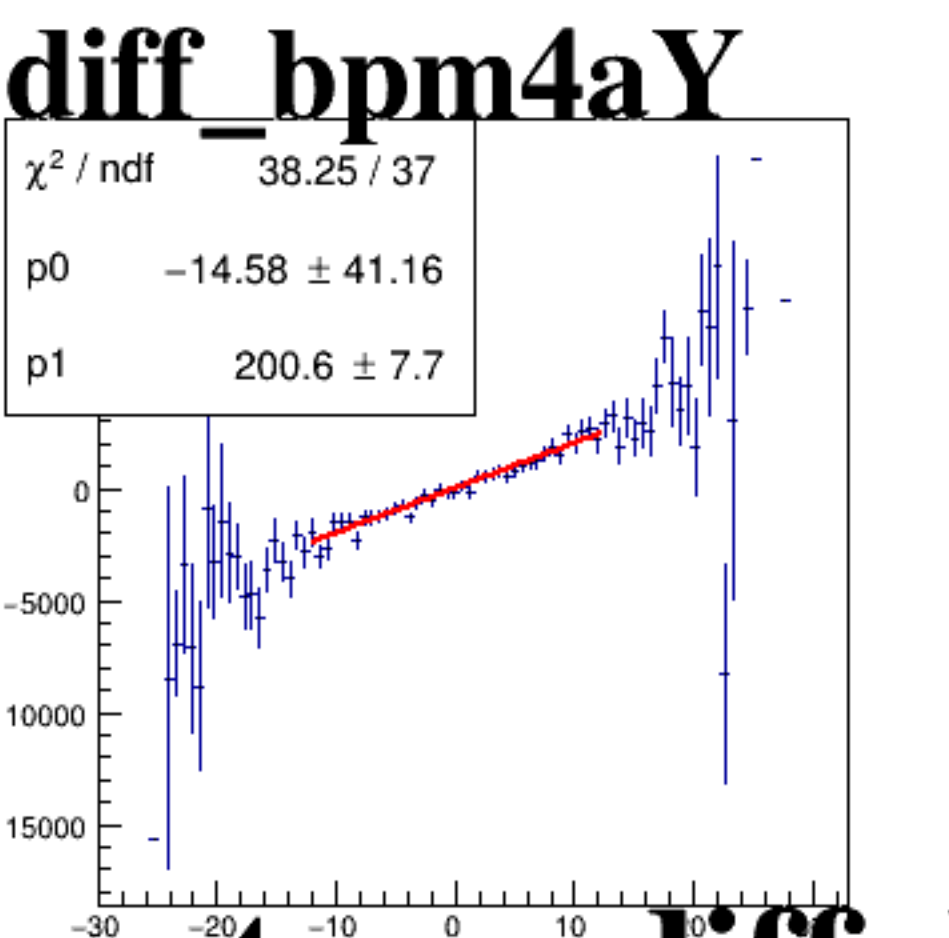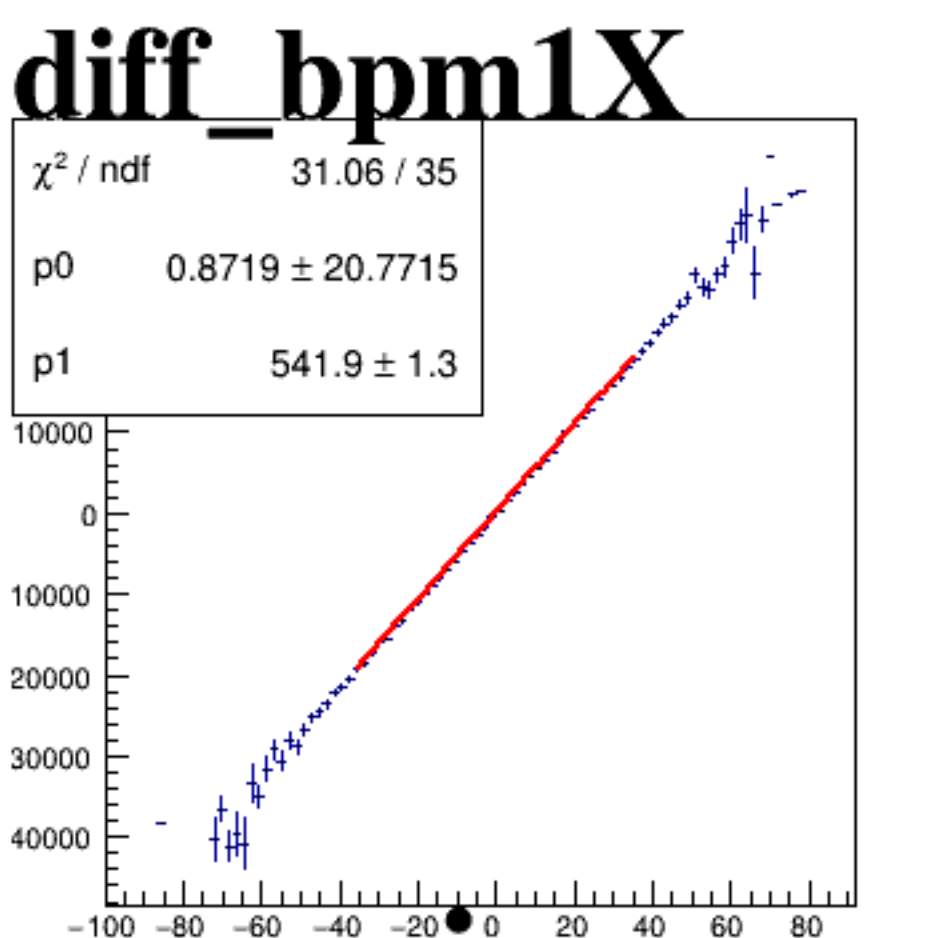


reg_asym_atl1

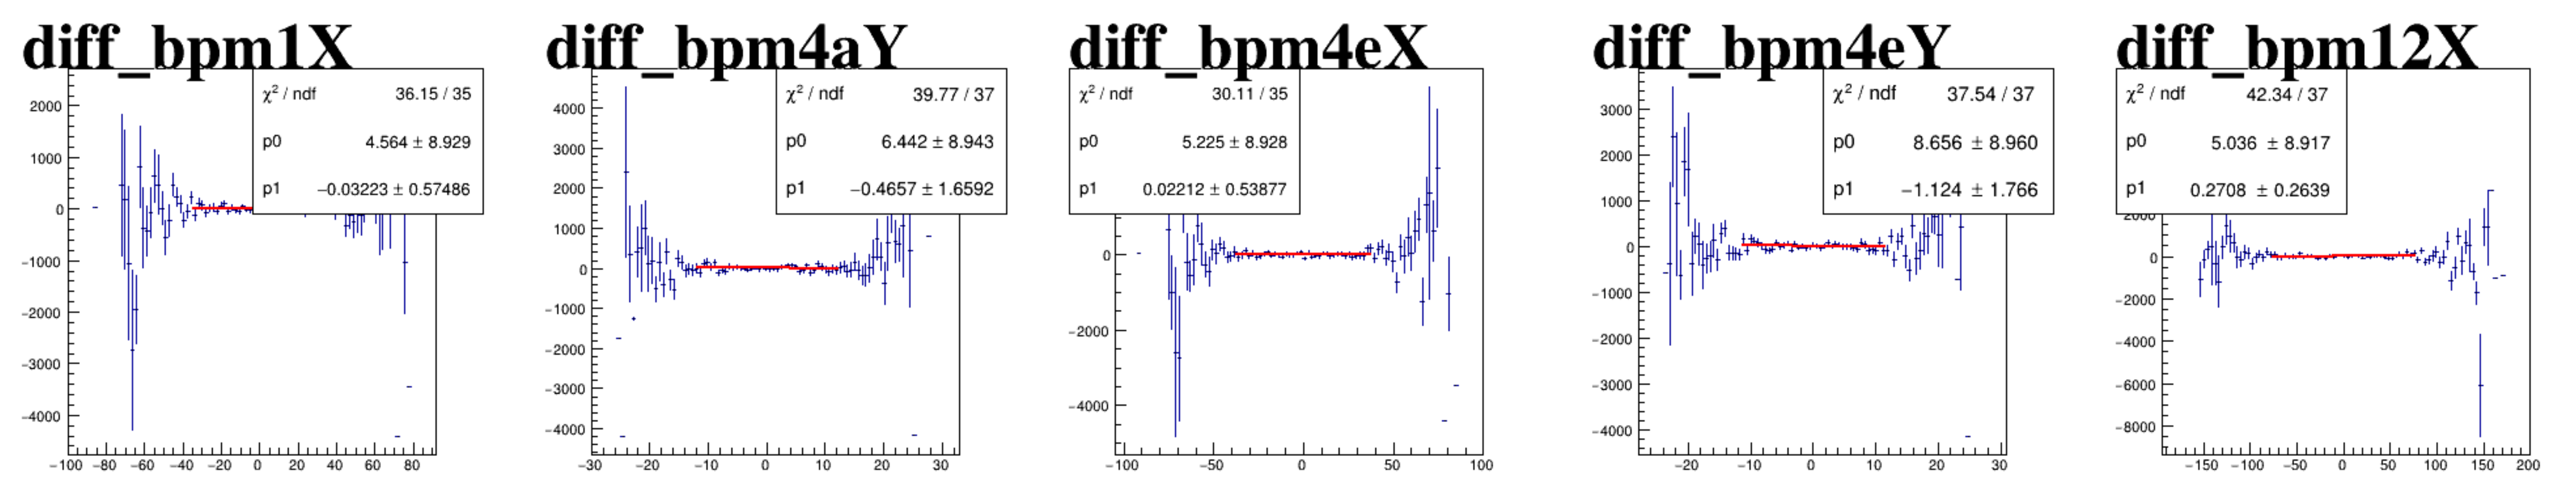


reg_asym_atr1

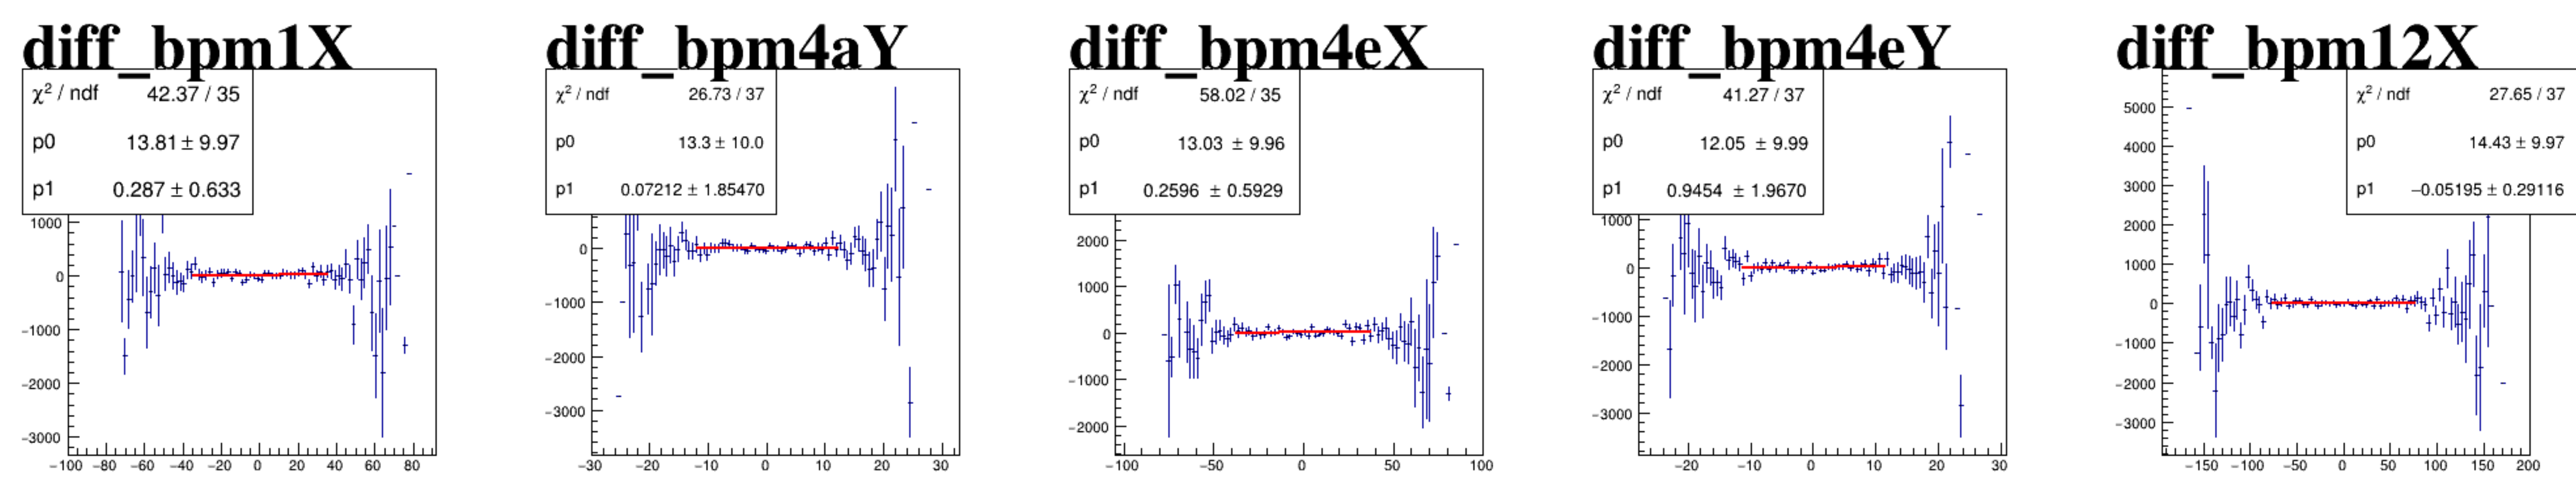






reg_asym_atl2

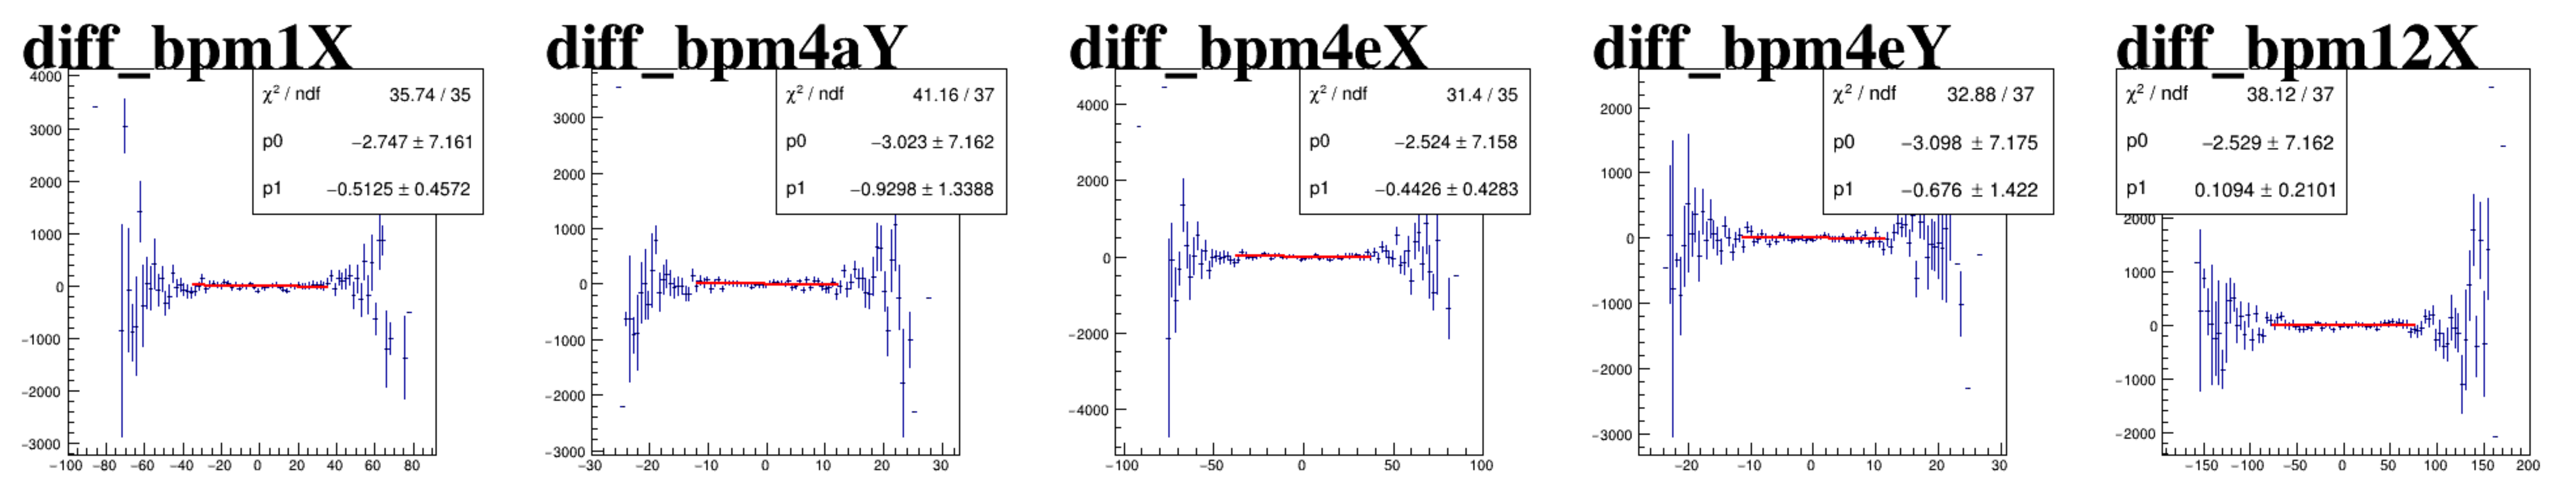






reg_asym_atr2

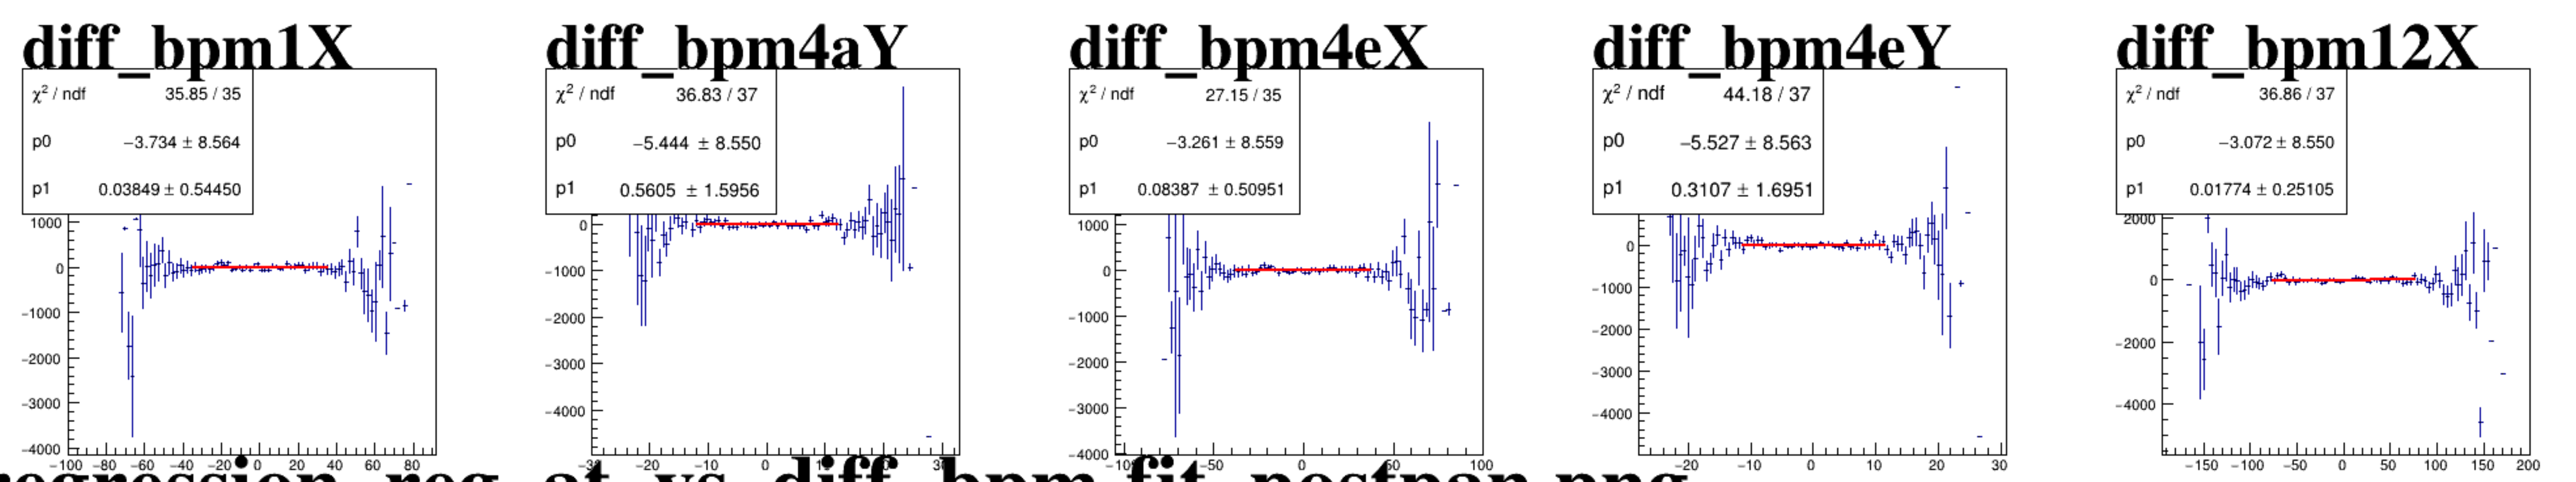






asym_atl1

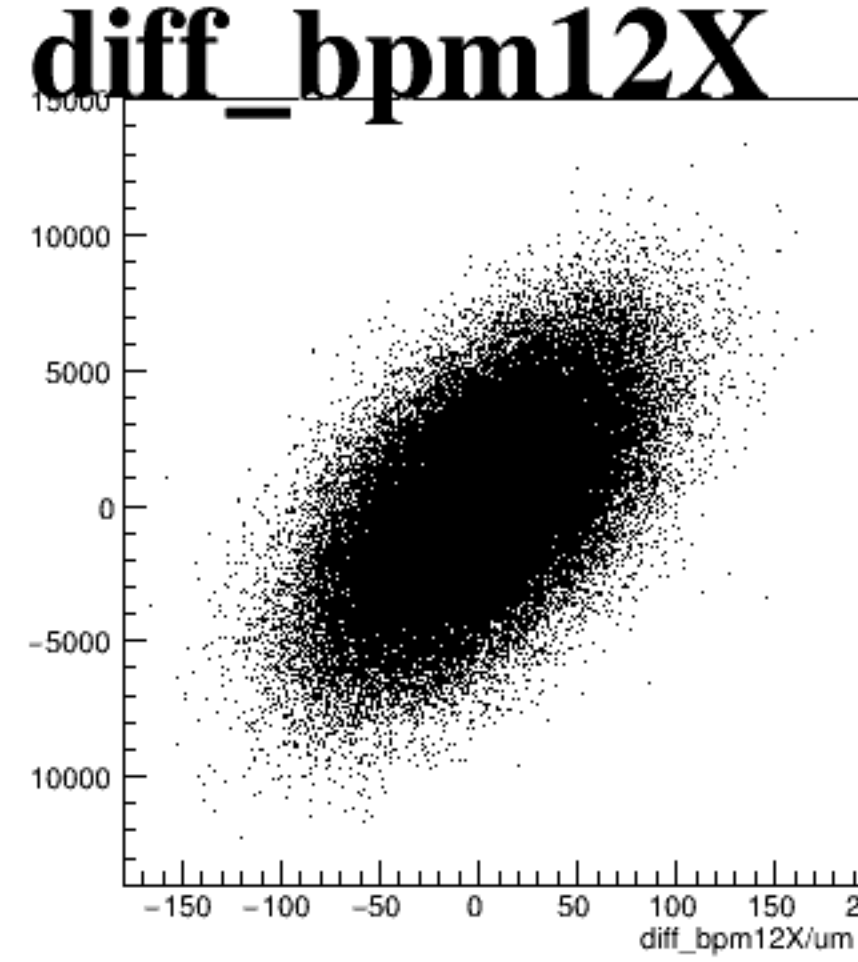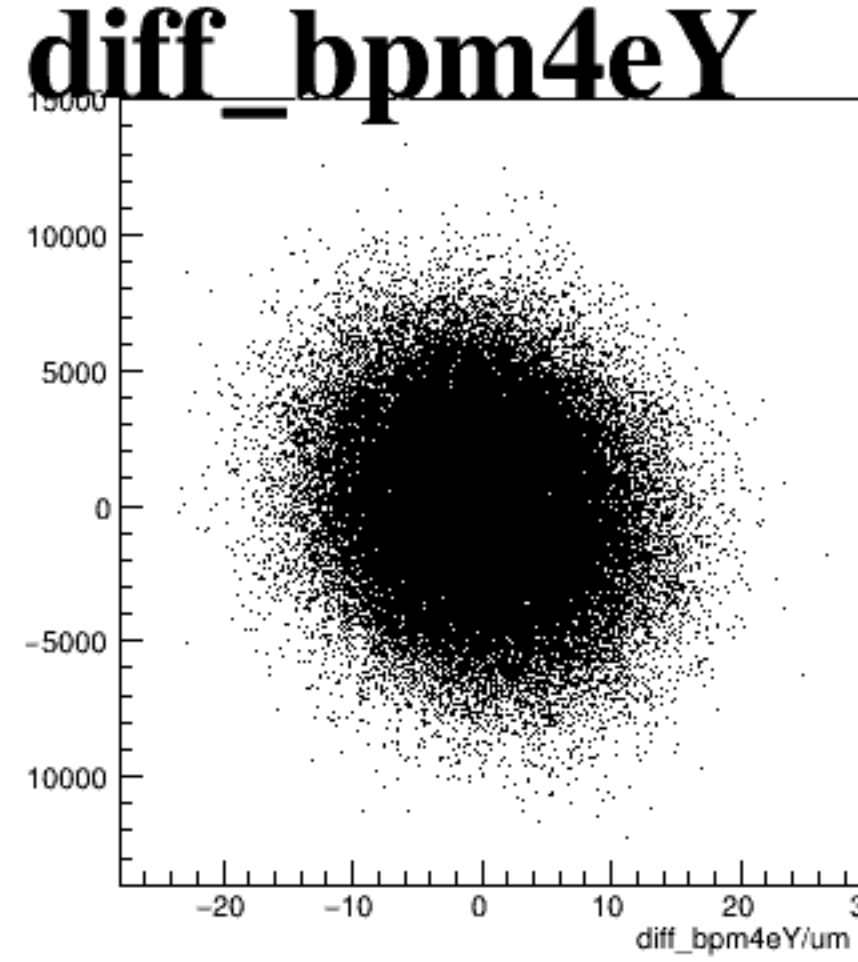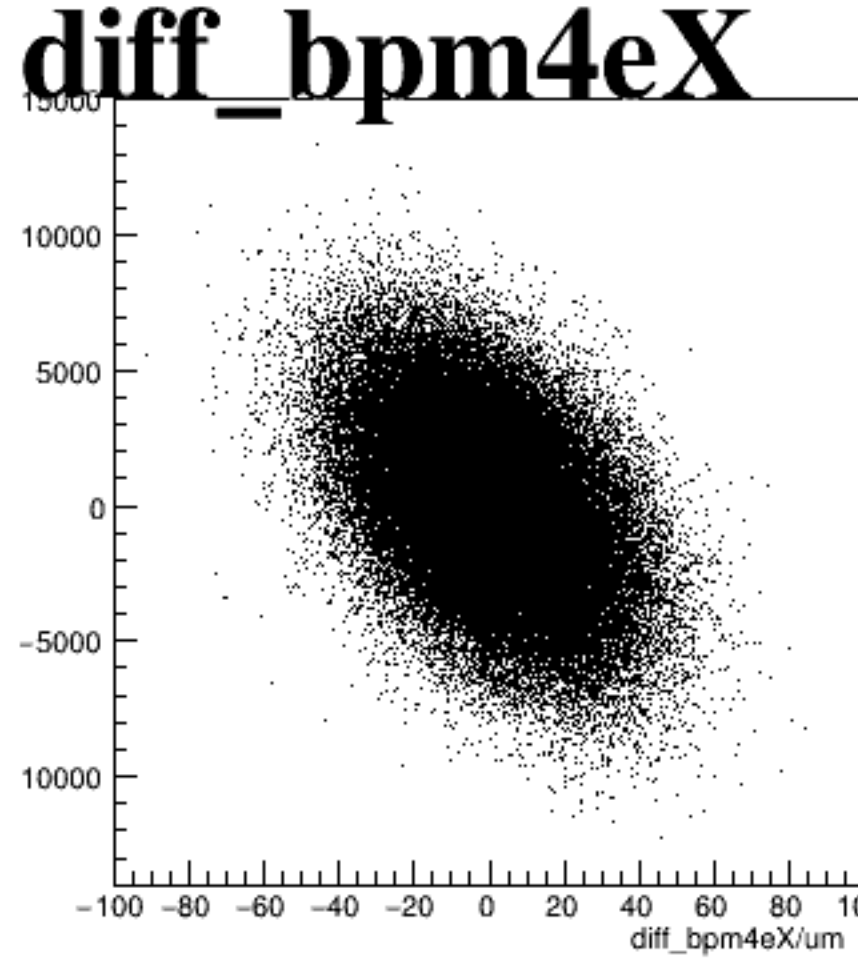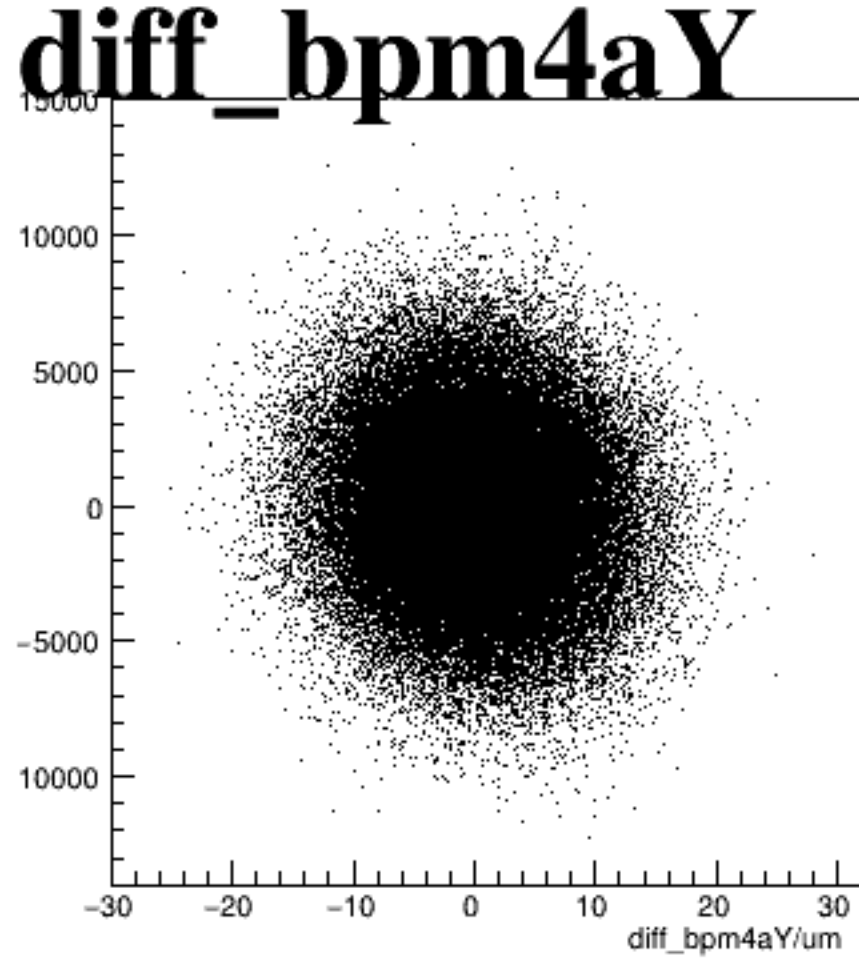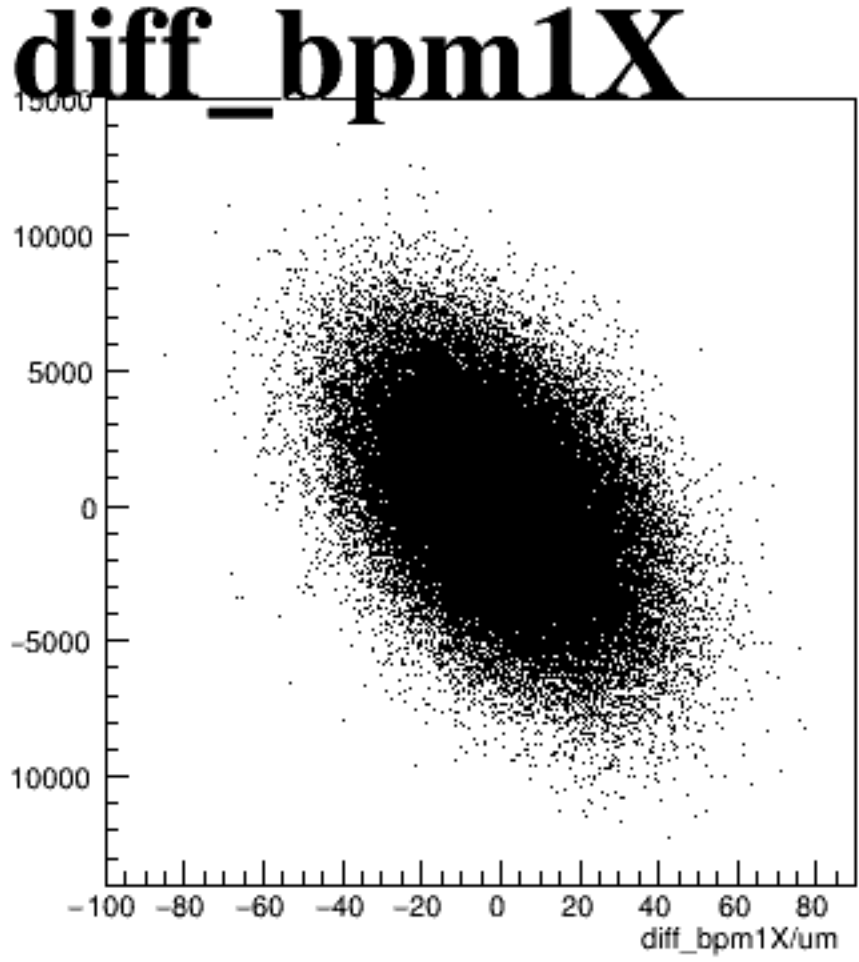






asym_atr1

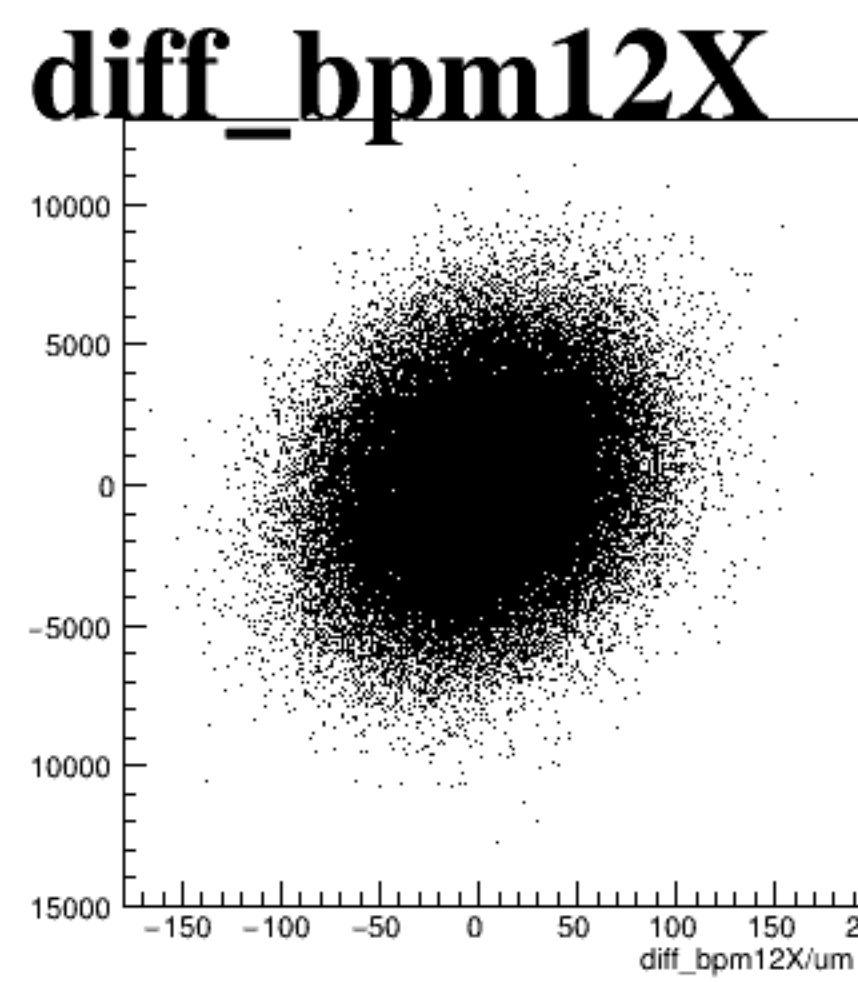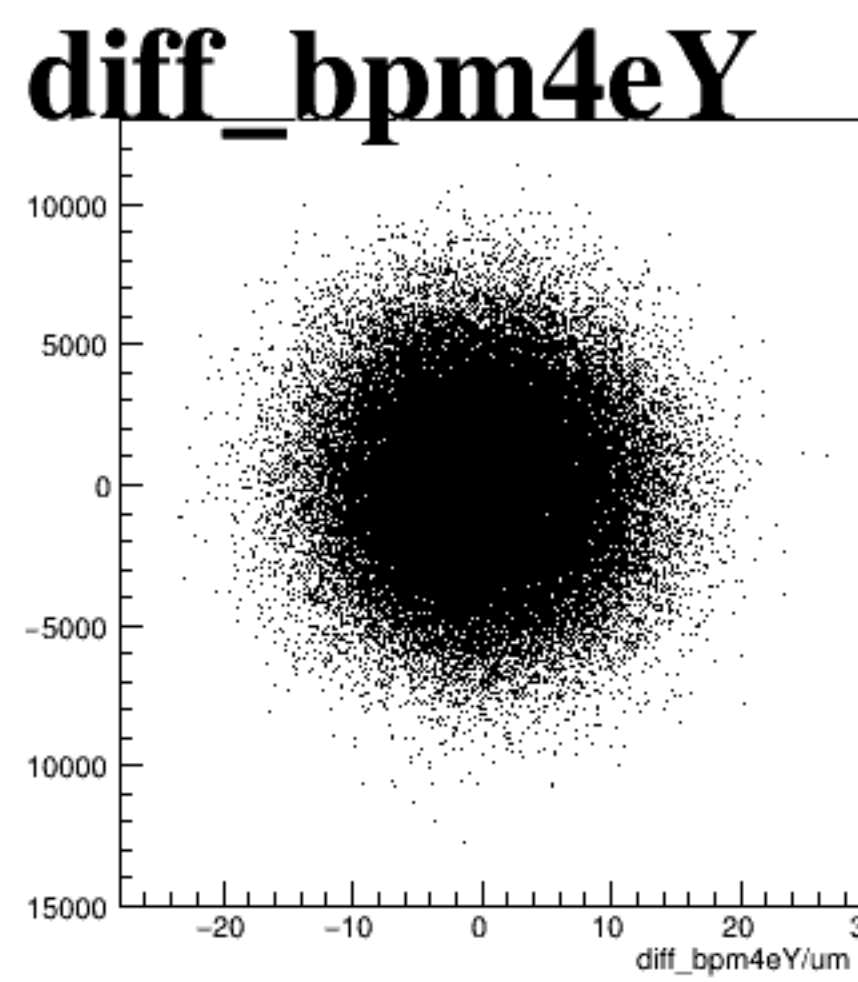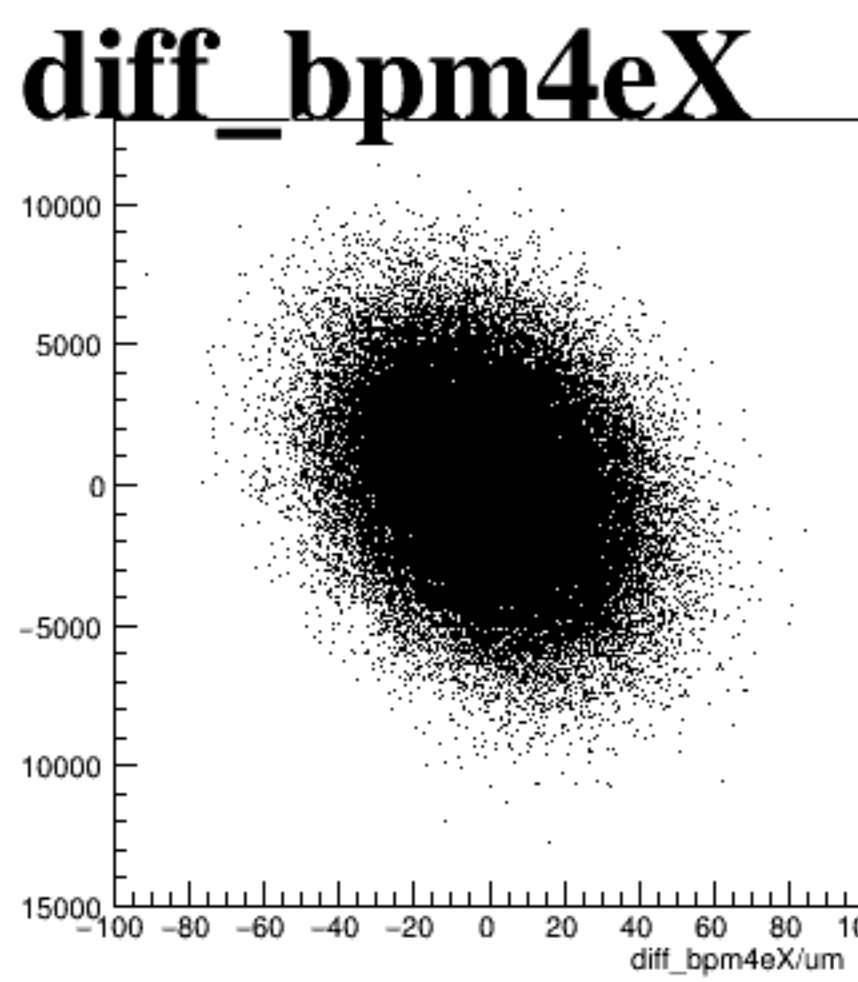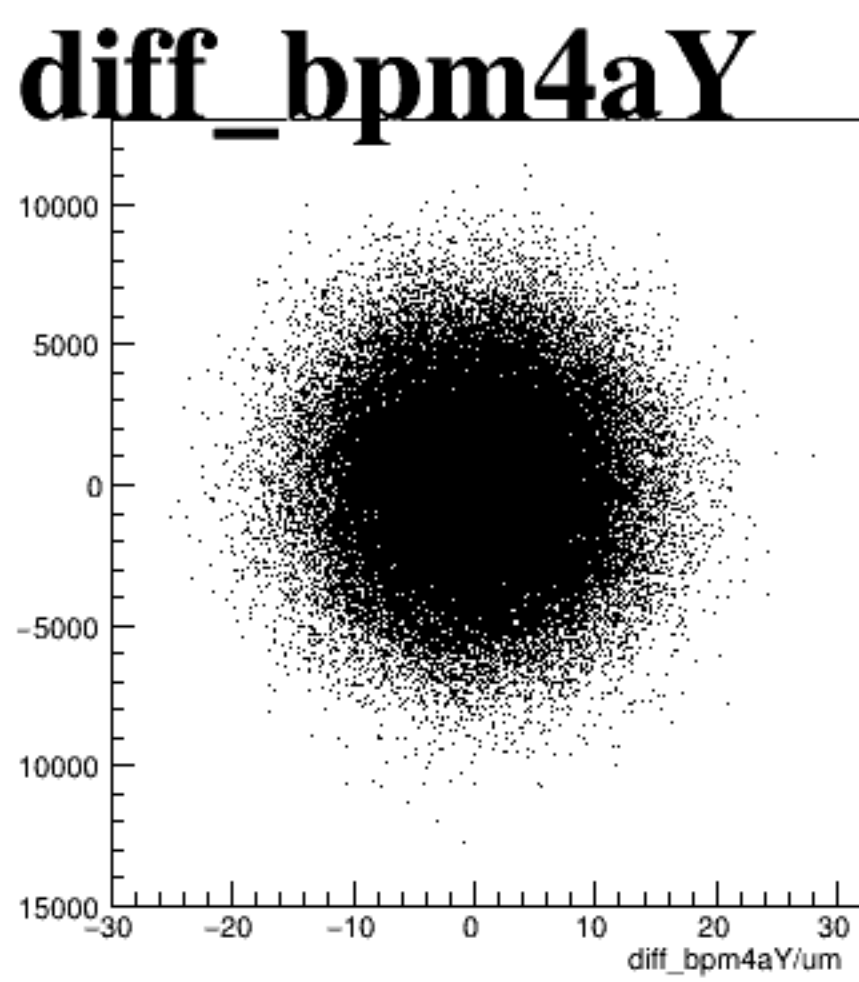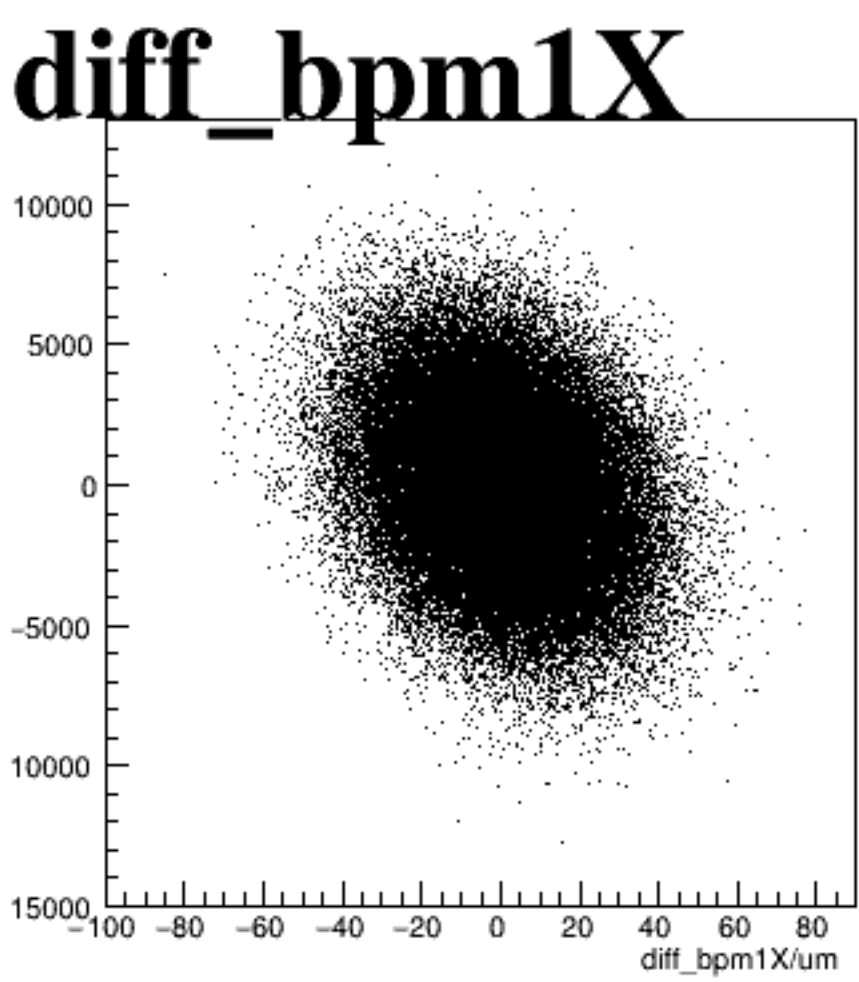

asym_atl2

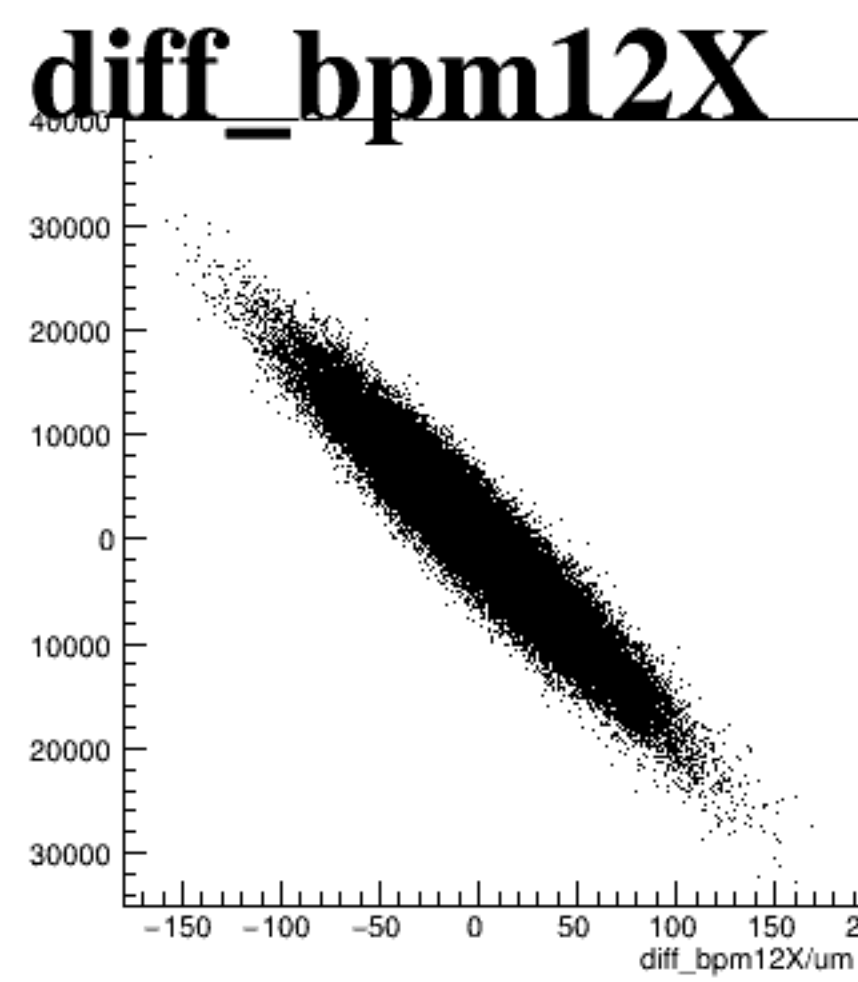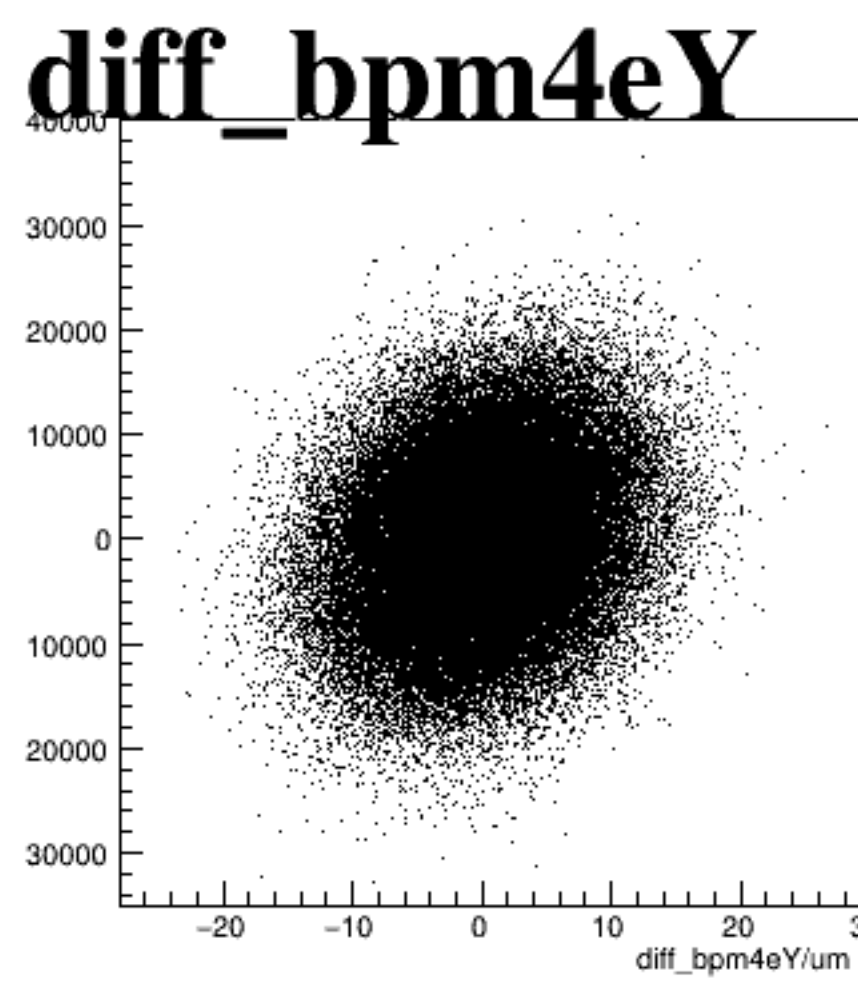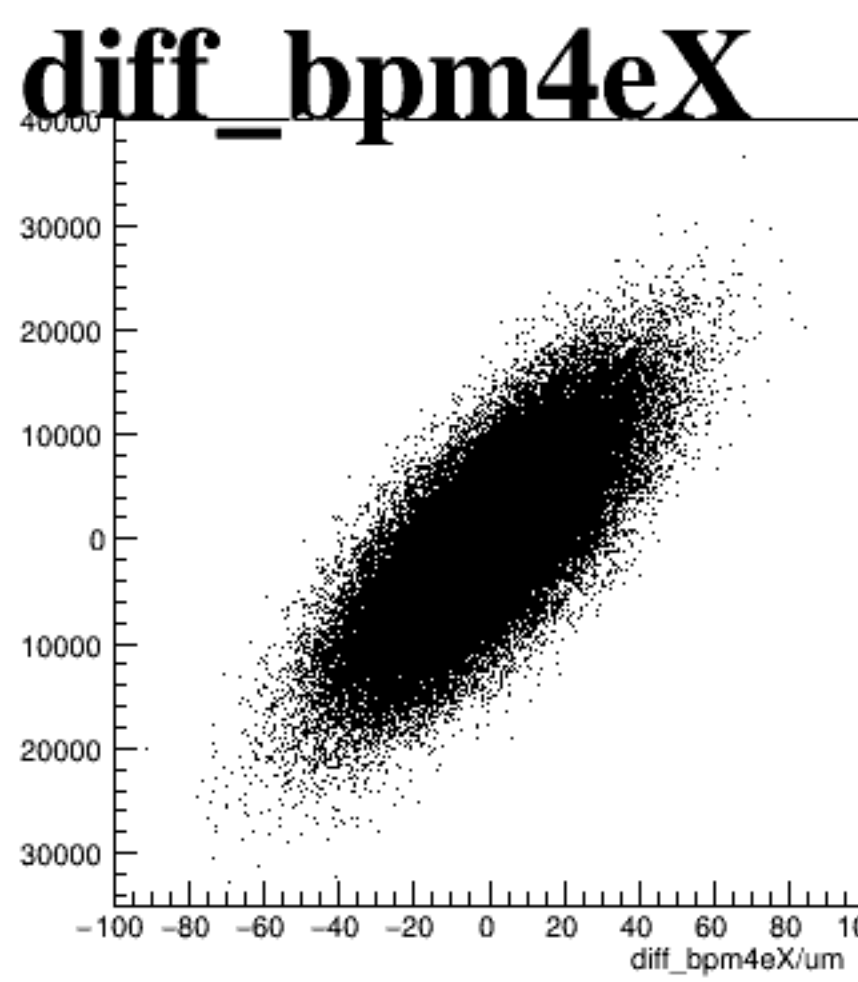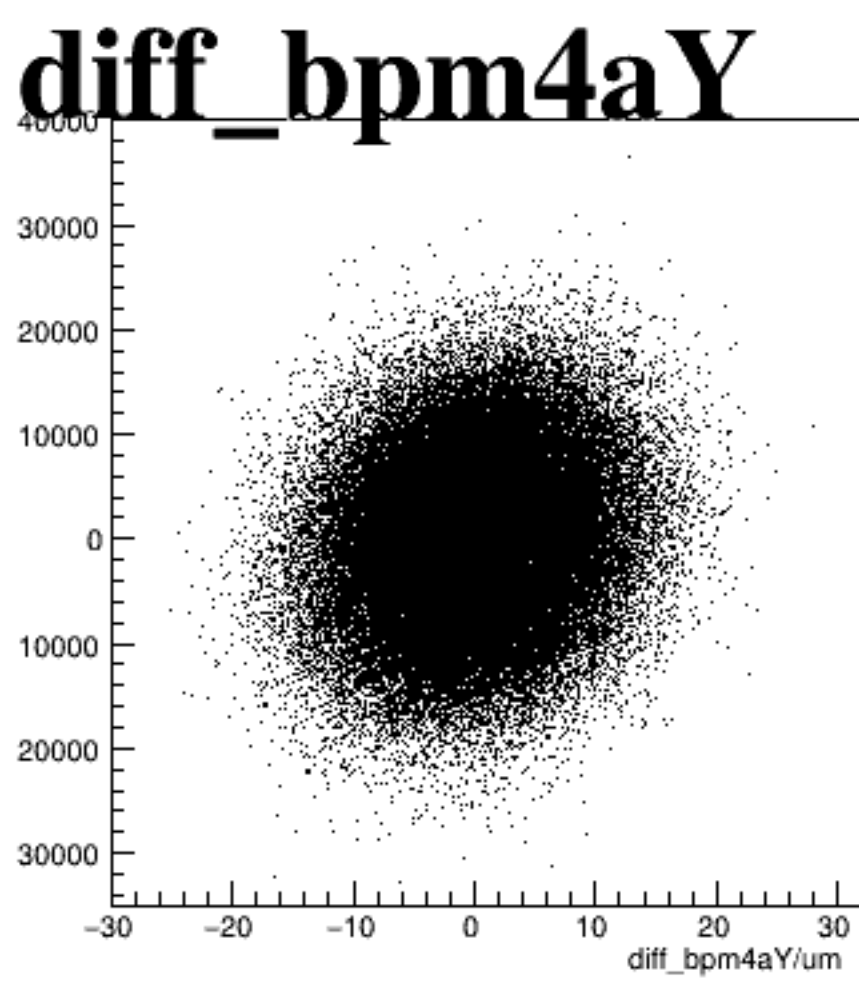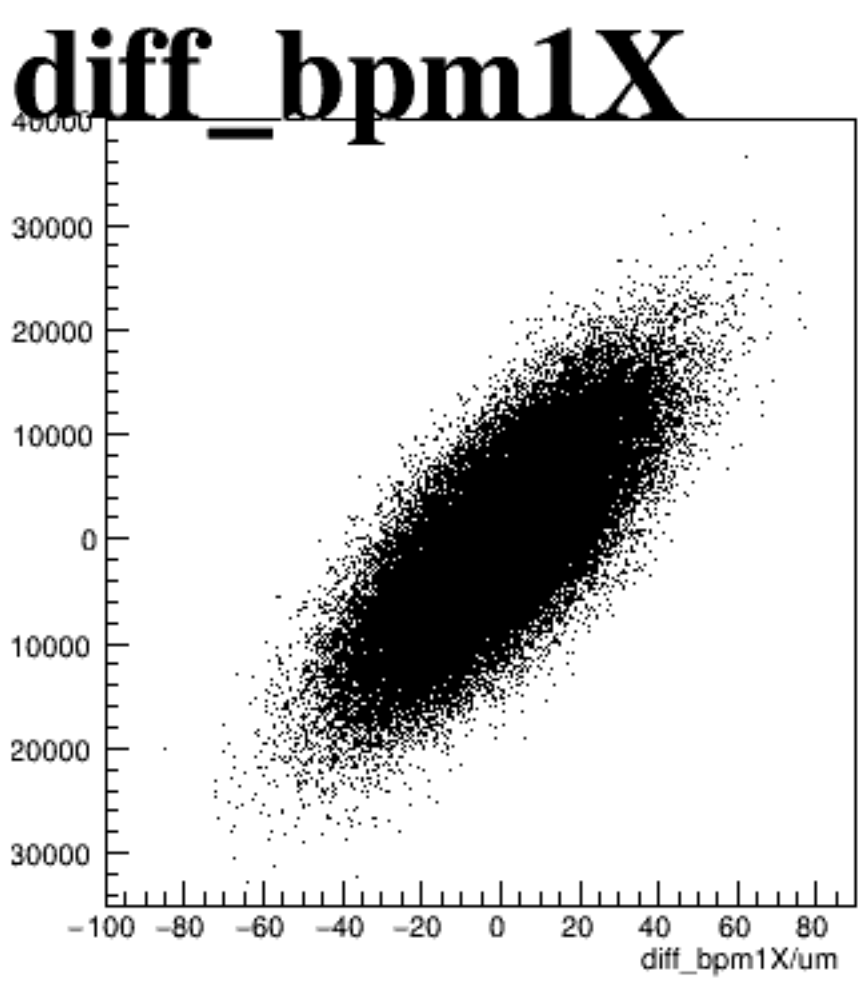

asym_atr2

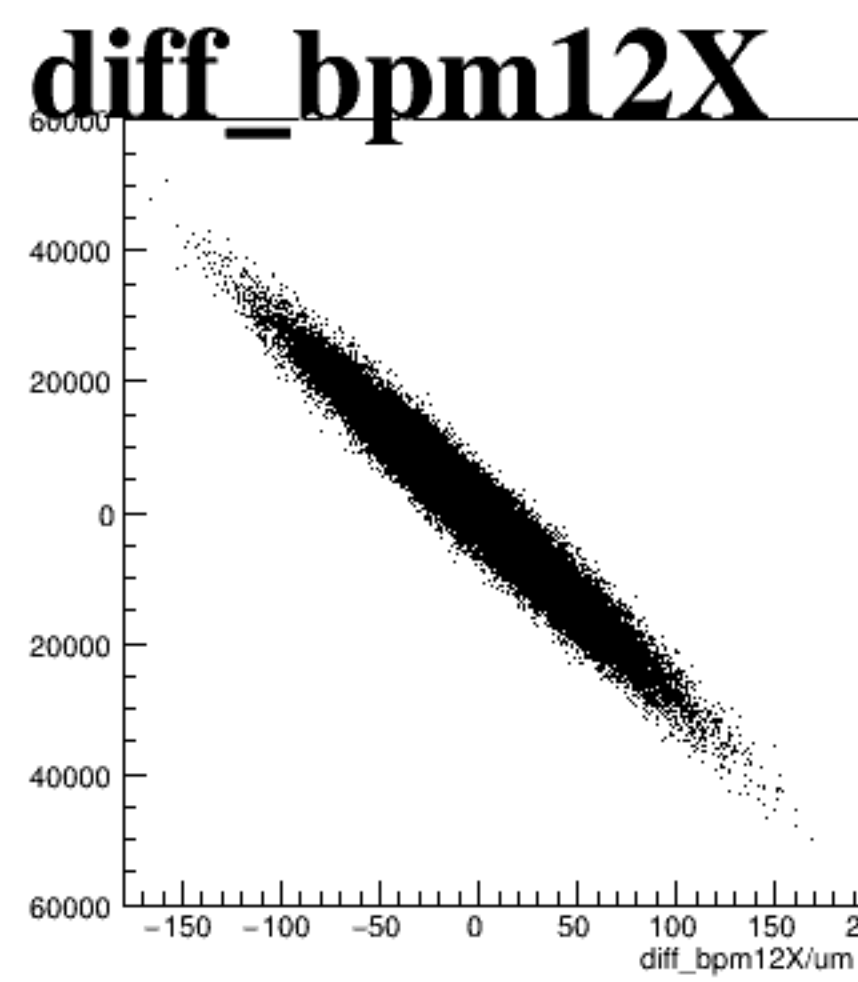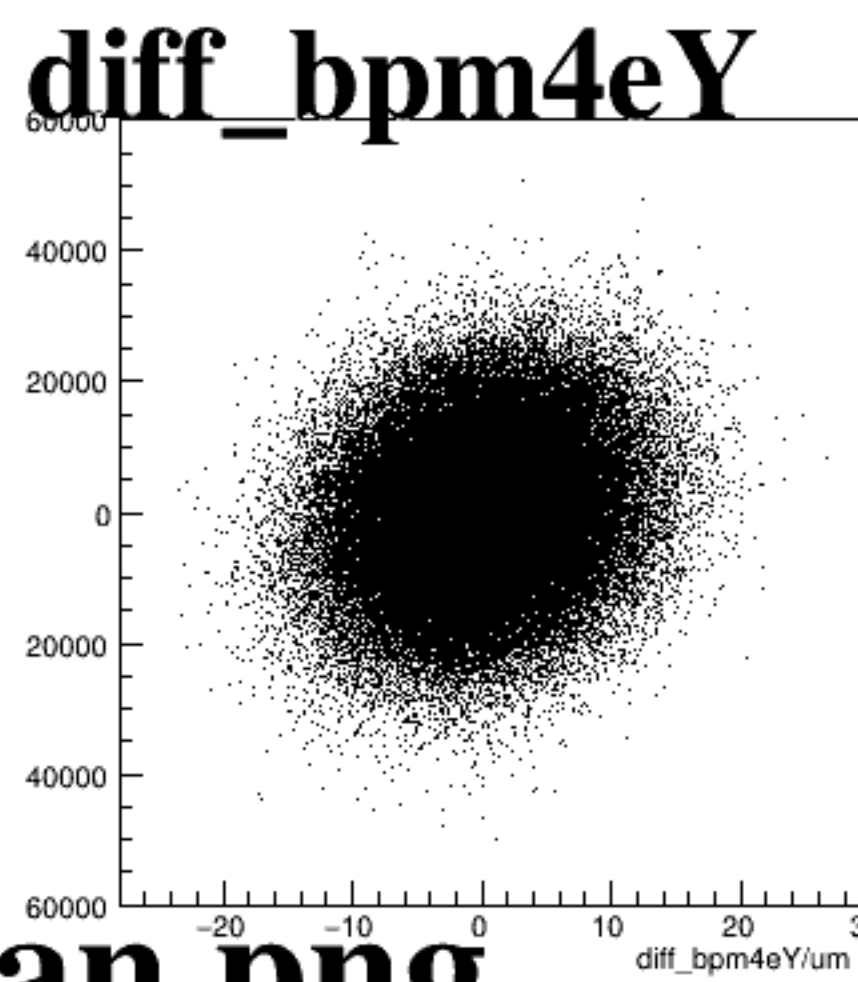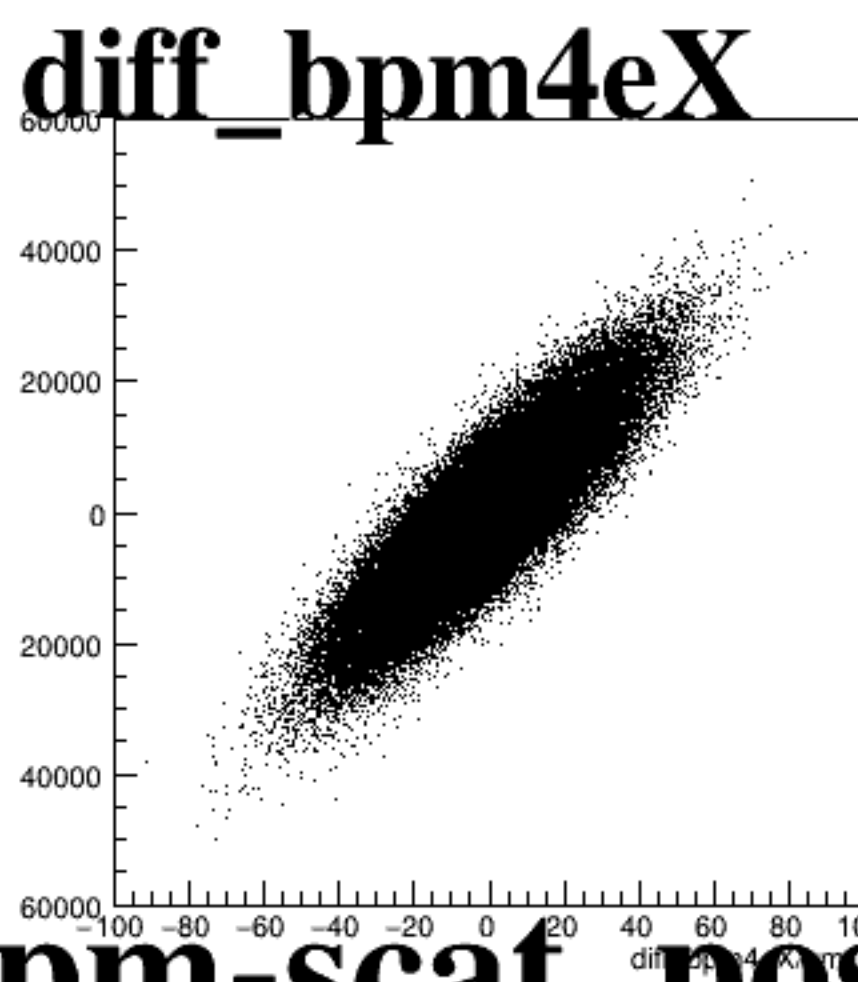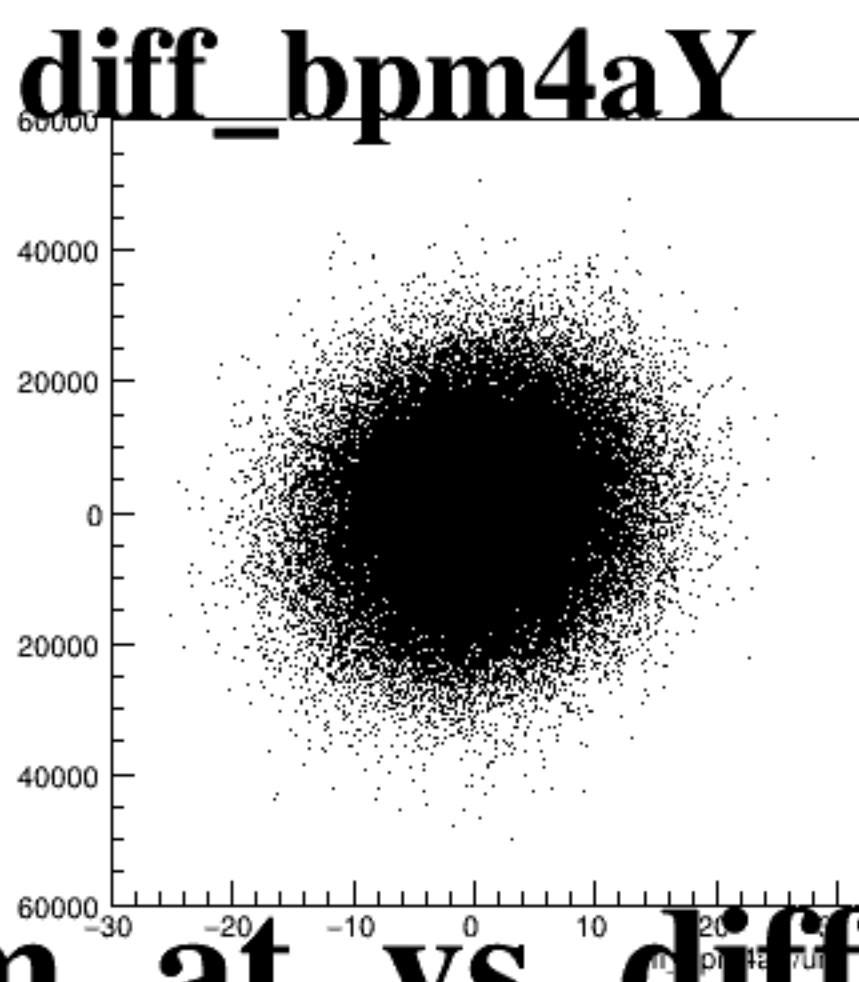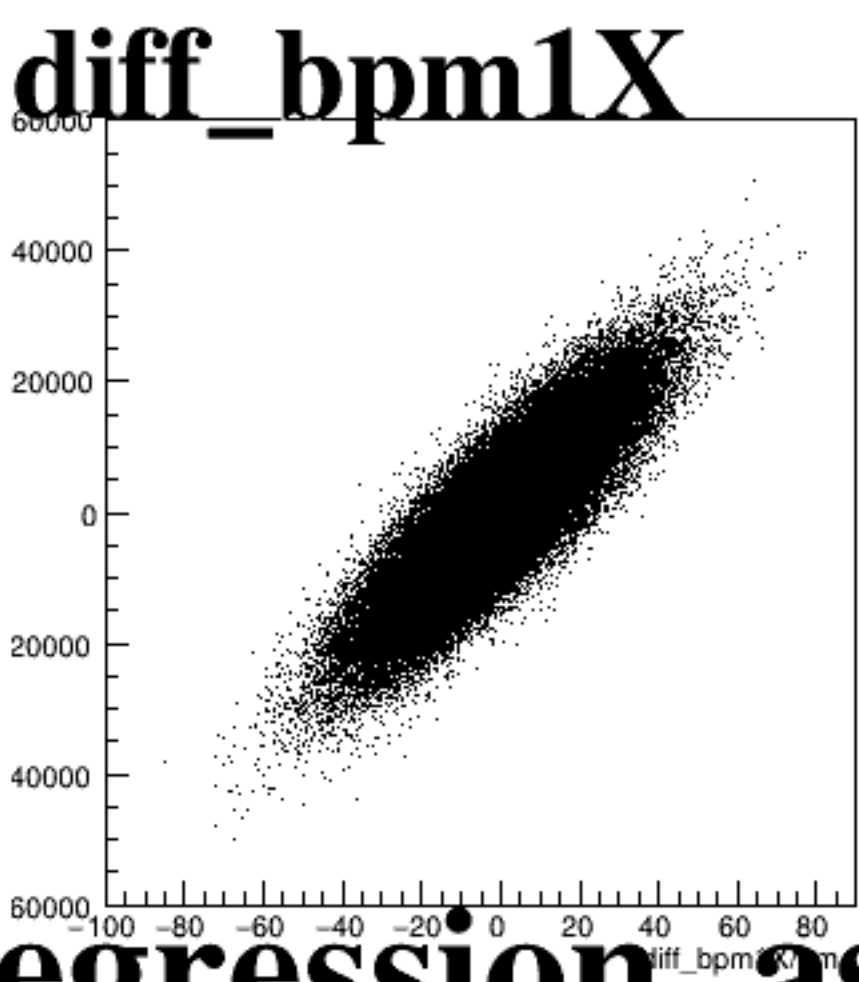

The figure consists of five scatter plots arranged horizontally, each showing the distribution of diffraction orders for a specific beam parameter. The plots are titled as follows:

- diff_bpm1X**: The x-axis is labeled $\text{diff_bpm1X}/\mu\text{m}$ and ranges from -100 to 100. The y-axis is labeled diff_bpm1X and ranges from -10000 to 10000.
- diff_bpm4aY**: The x-axis is labeled $\text{diff_bpm4aY}/\mu\text{m}$ and ranges from -30 to 30. The y-axis is labeled diff_bpm4aY and ranges from -10000 to 10000.
- diff_bpm4eX**: The x-axis is labeled $\text{diff_bpm4eX}/\mu\text{m}$ and ranges from -100 to 100. The y-axis is labeled diff_bpm4eX and ranges from -10000 to 10000.
- diff_bpm4eY**: The x-axis is labeled $\text{diff_bpm4eY}/\mu\text{m}$ and ranges from -20 to 30. The y-axis is labeled diff_bpm4eY and ranges from -10000 to 10000.
- diff_bpm12X**: The x-axis is labeled $\text{diff_bpm12X}/\mu\text{m}$ and ranges from -150 to 200. The y-axis is labeled diff_bpm12X and ranges from -10000 to 10000.

Each plot displays a dense, roughly circular cloud of points centered at the origin (0,0), representing the distribution of diffraction orders for the respective beam parameter.