




asym_atl1

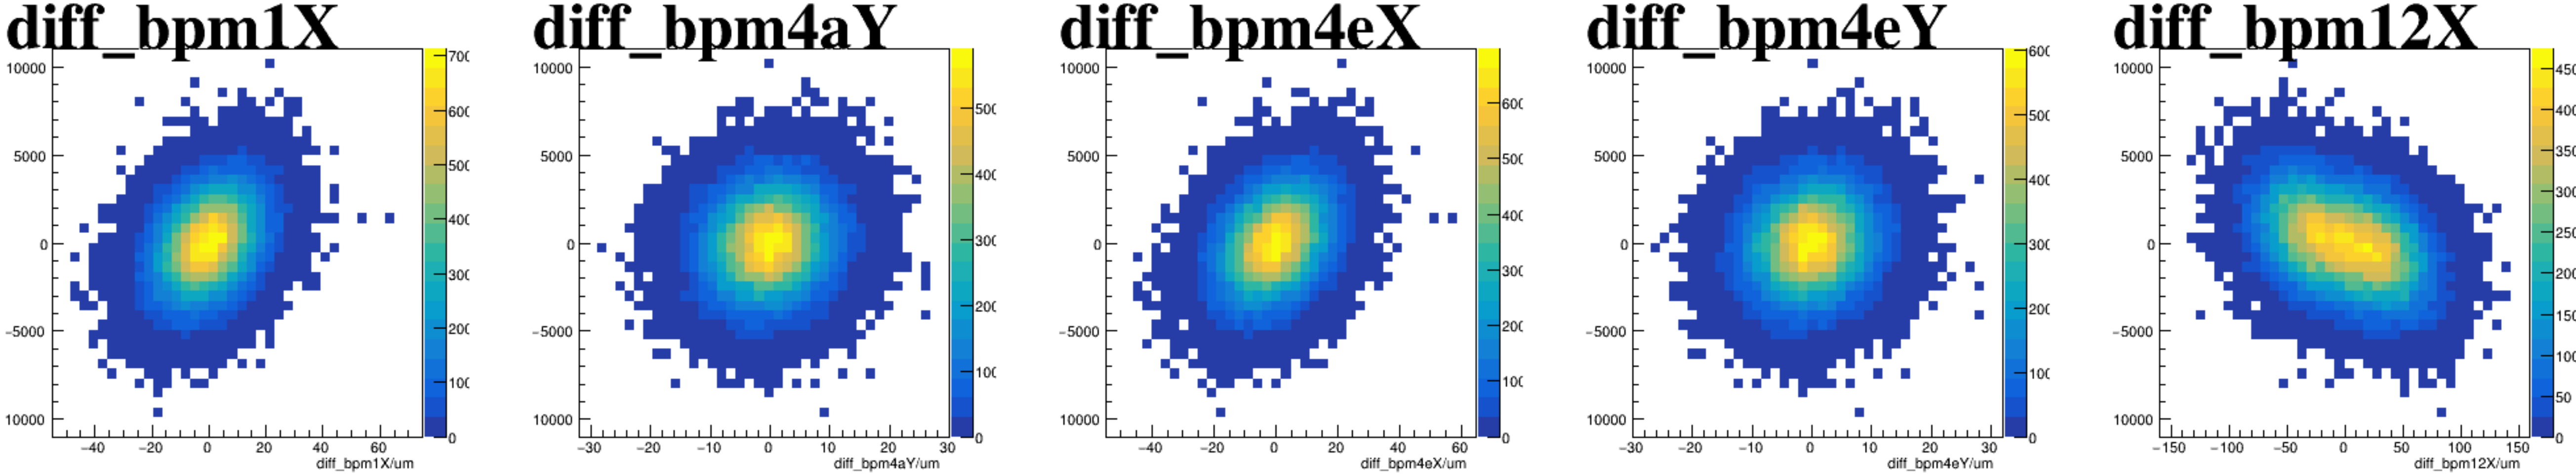


asym_atr1

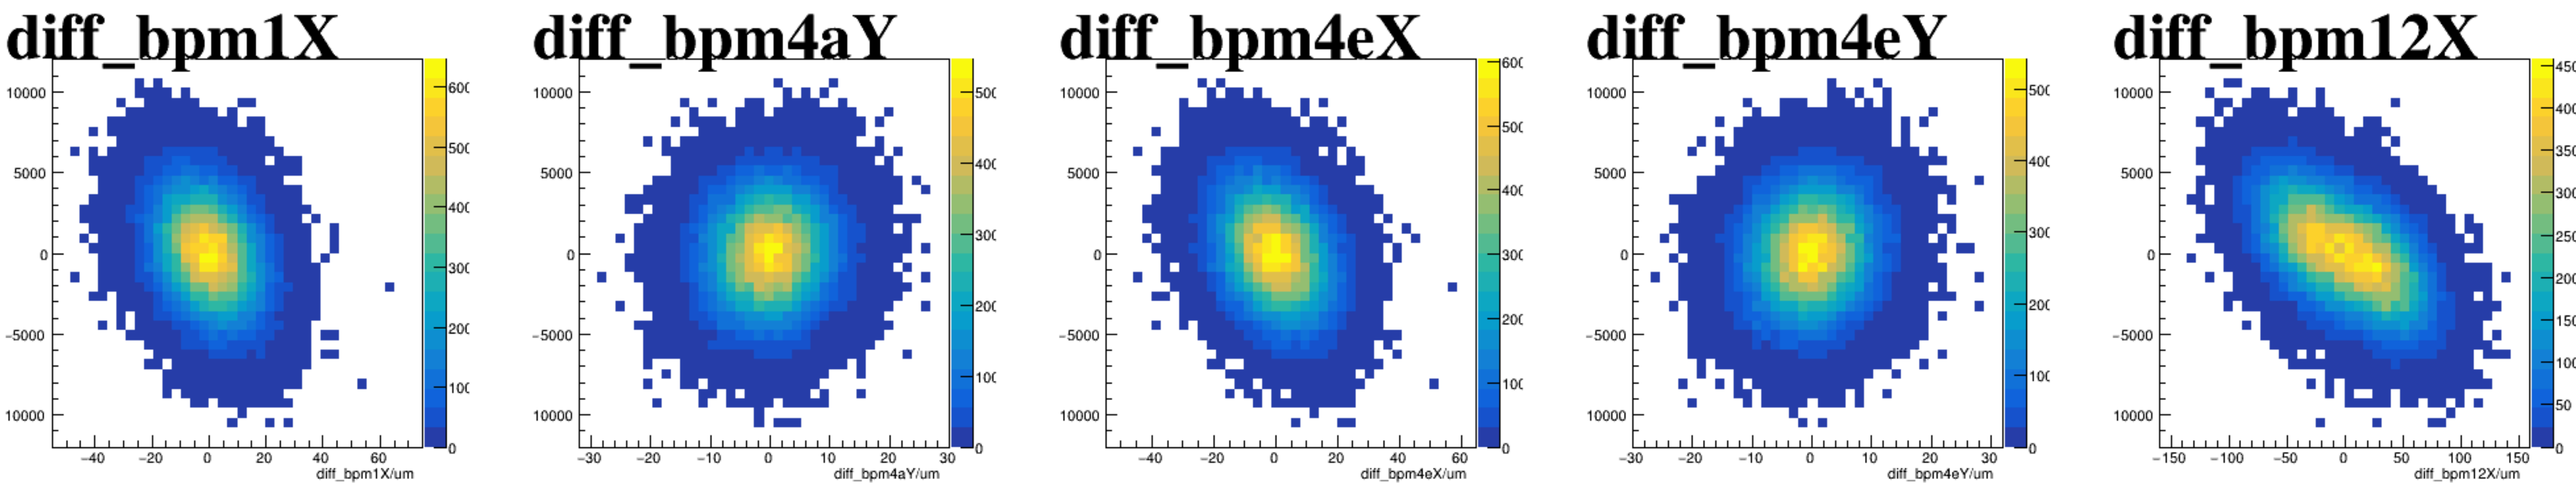


asym_atl2

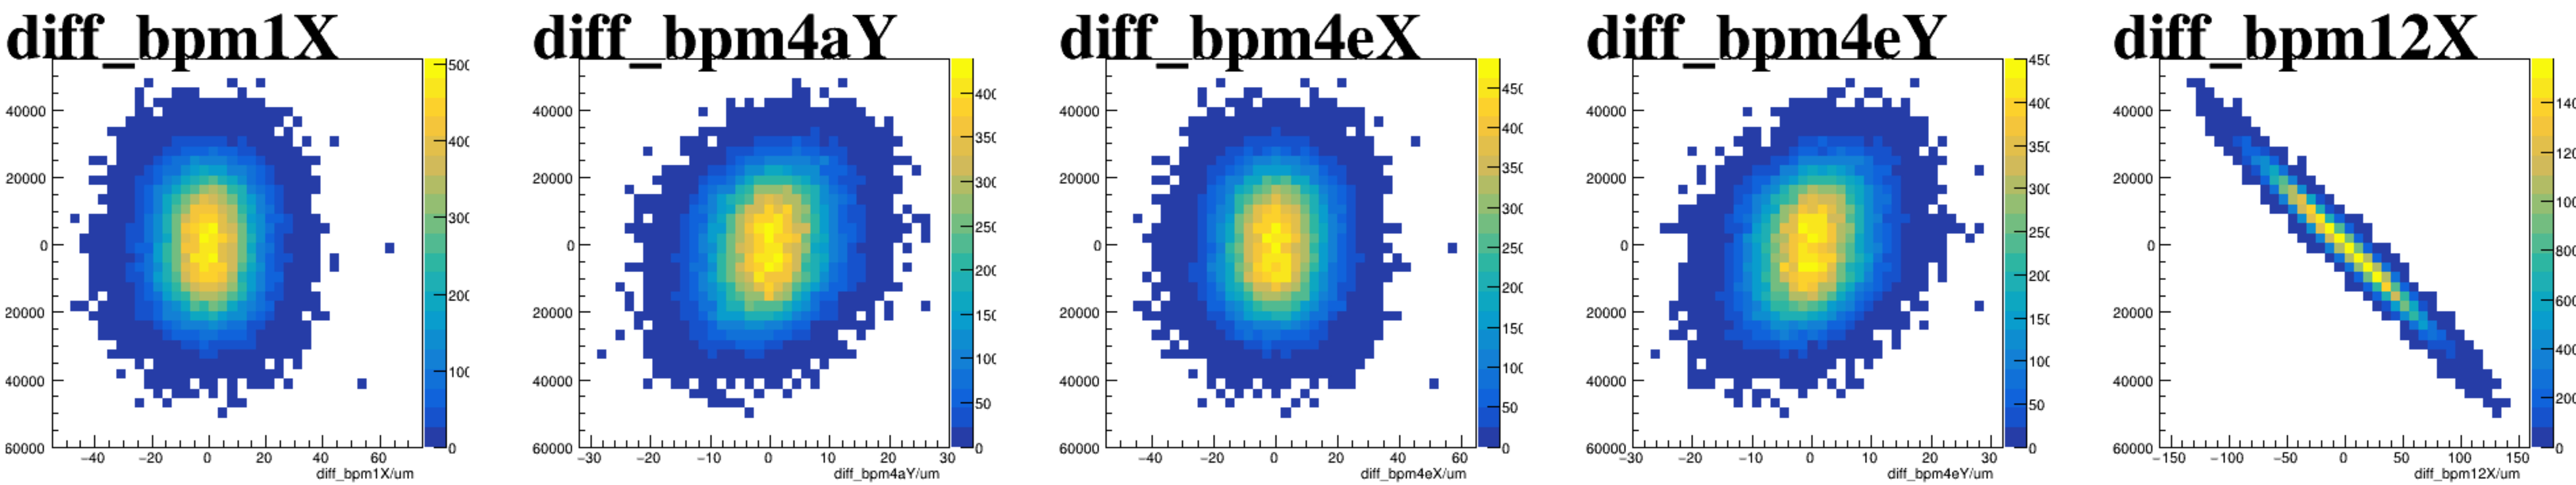


asym_atr2

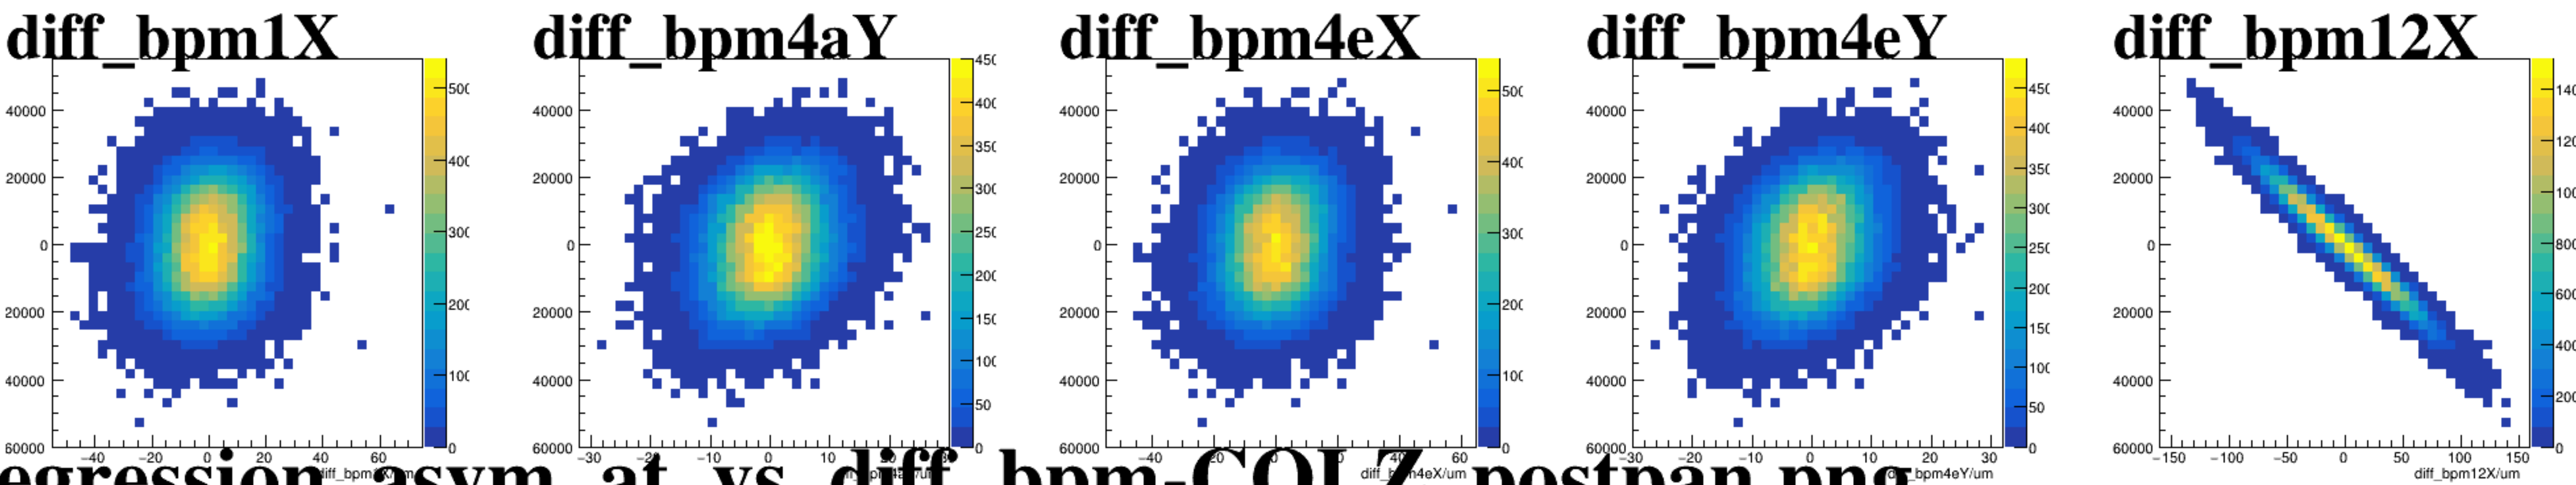


reg_asym_atl1

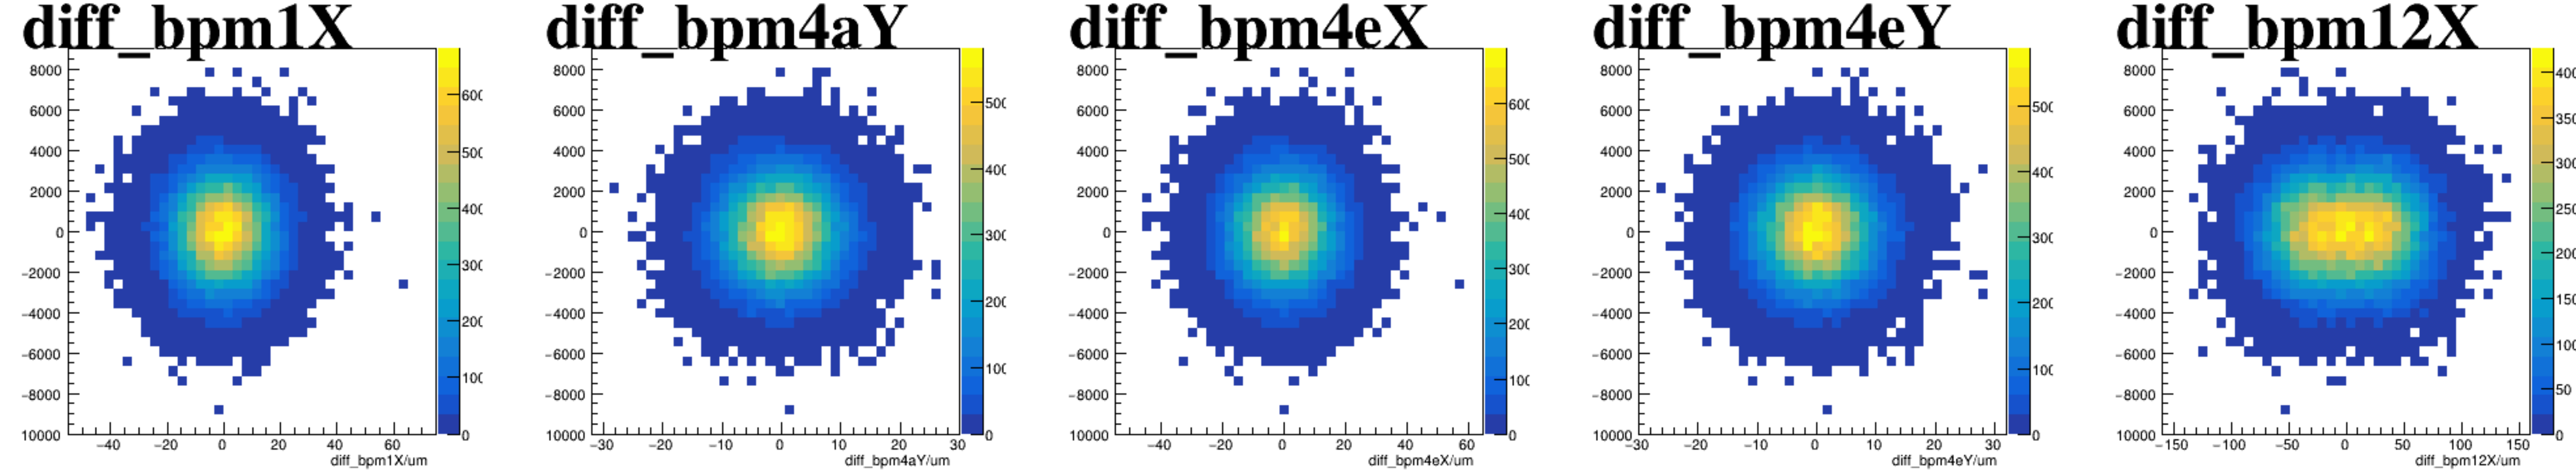


reg_asym_atr1

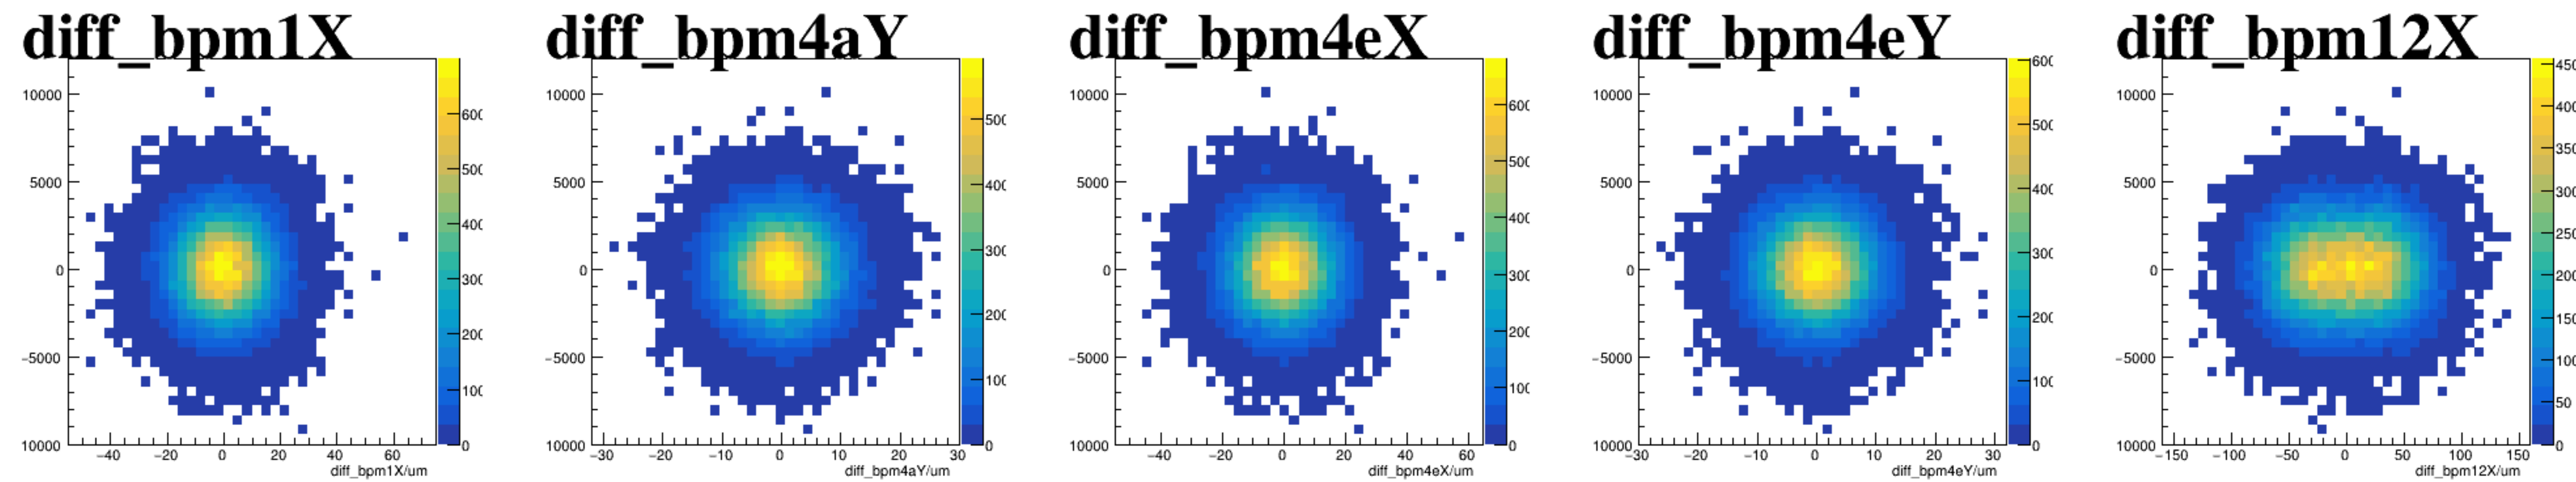






reg_asym_atl2

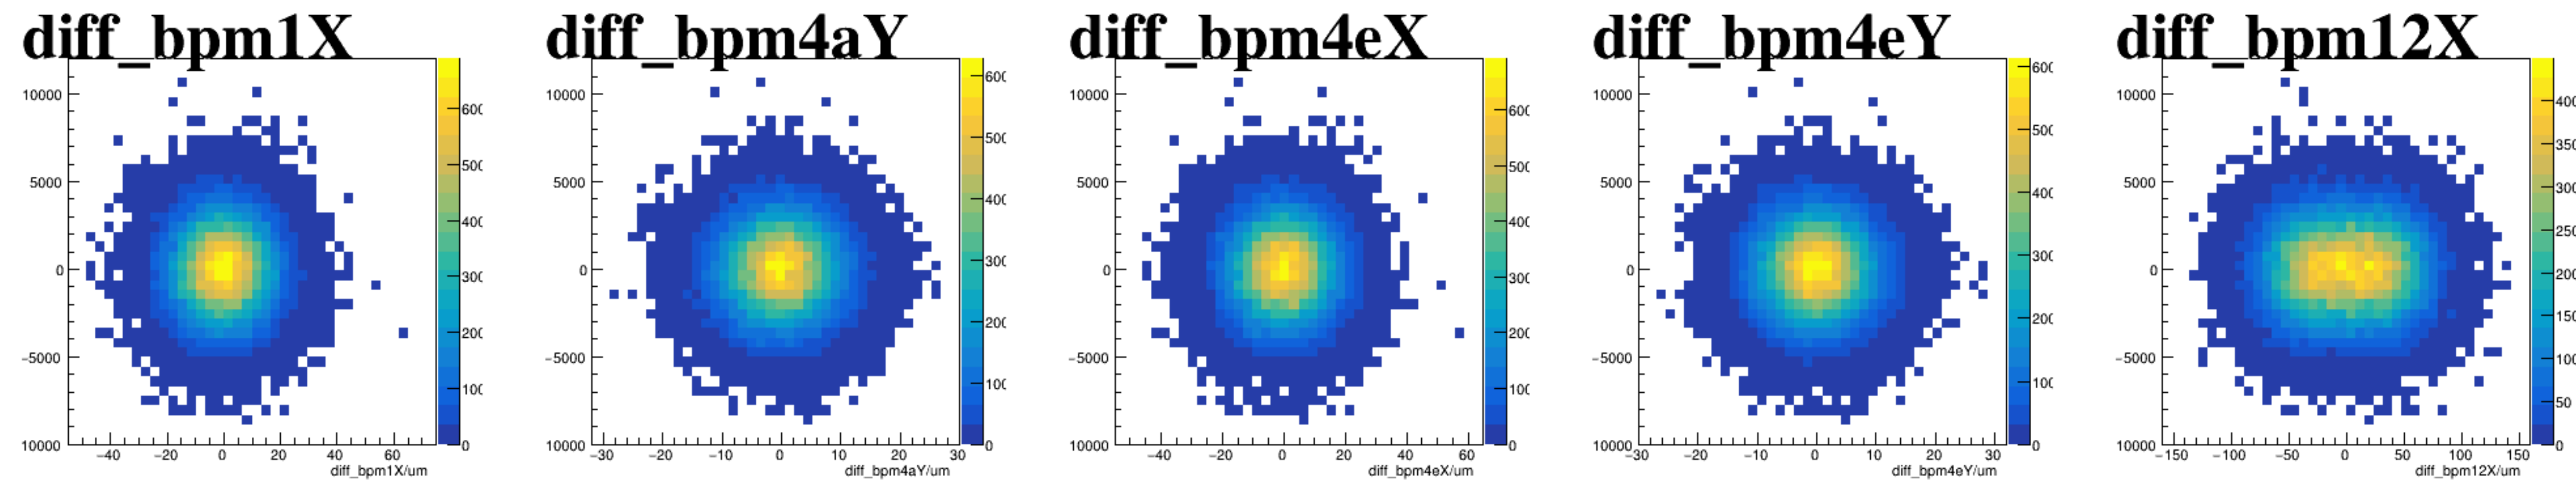






reg_asym_atr2

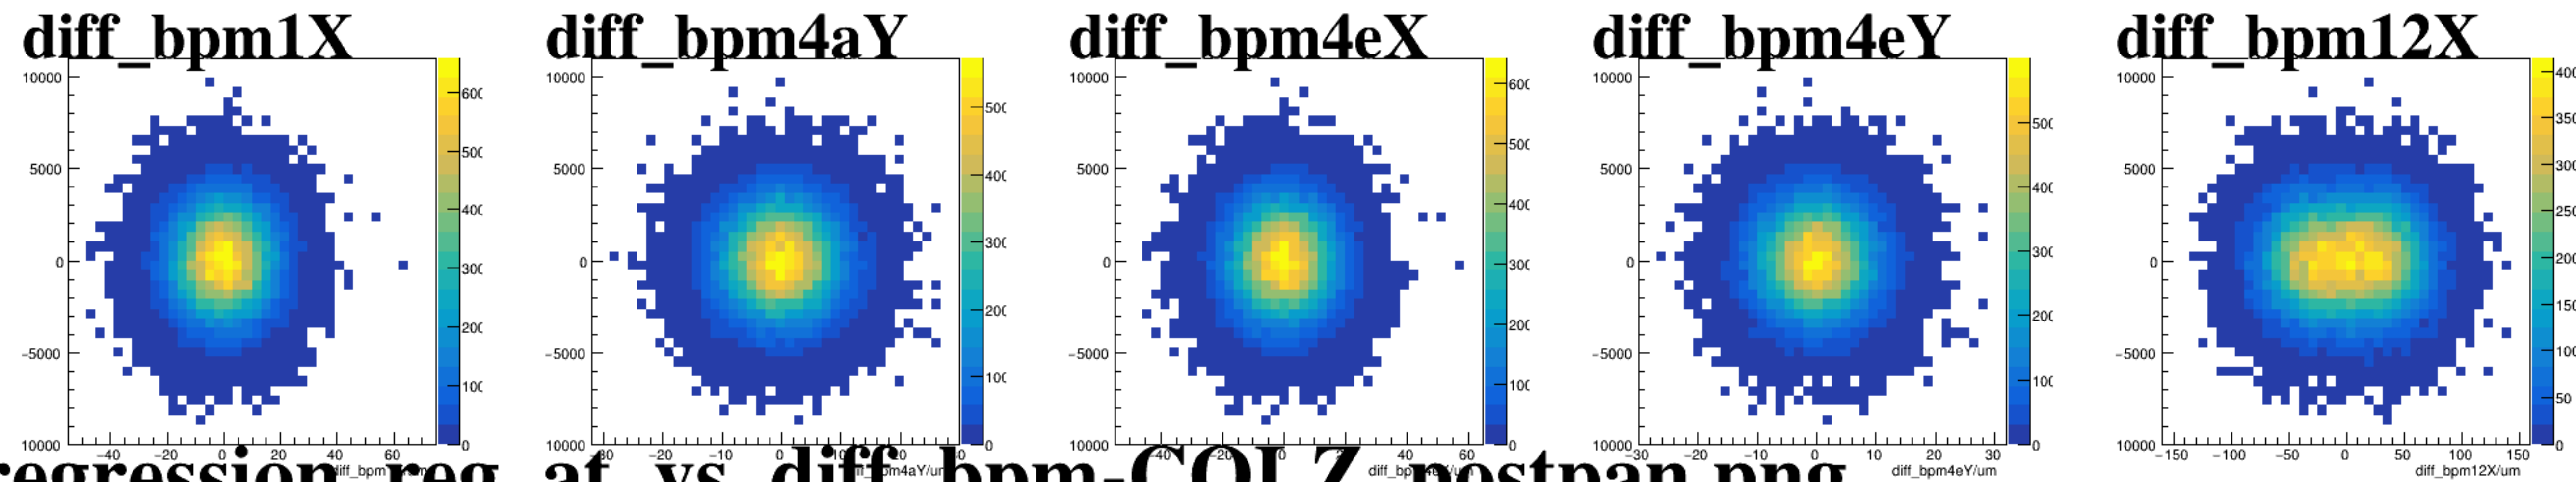






asym_atl1

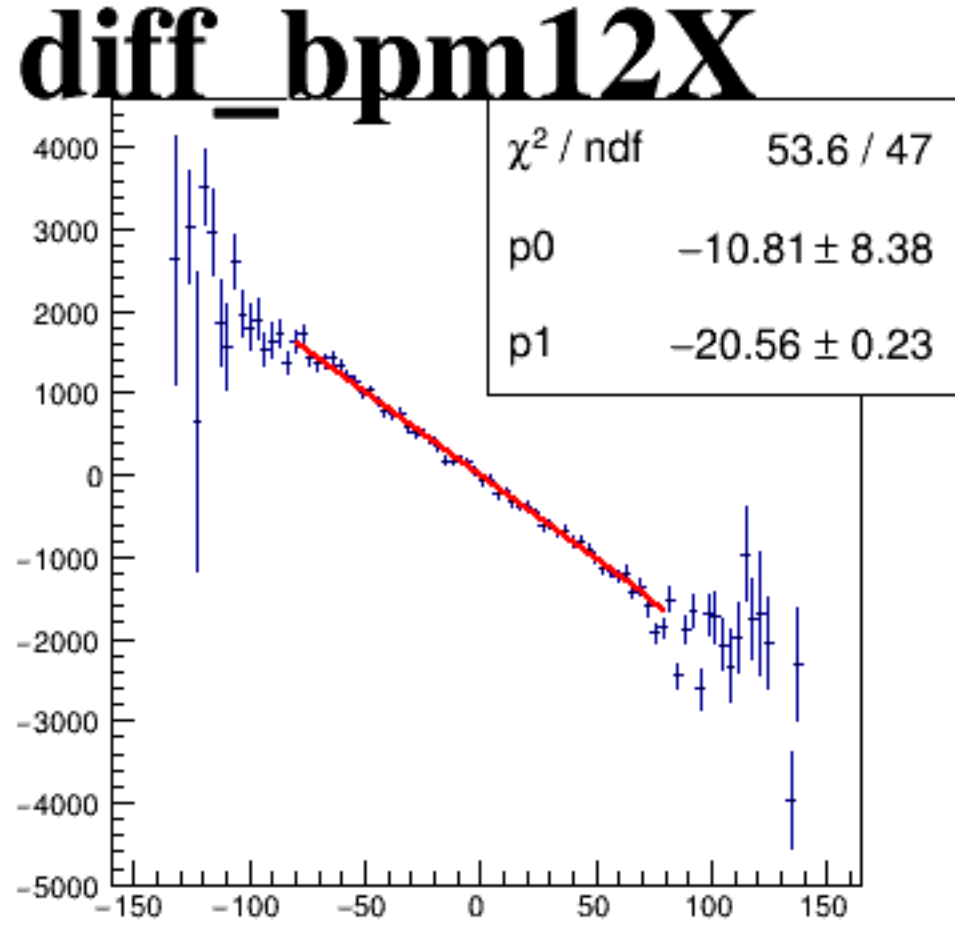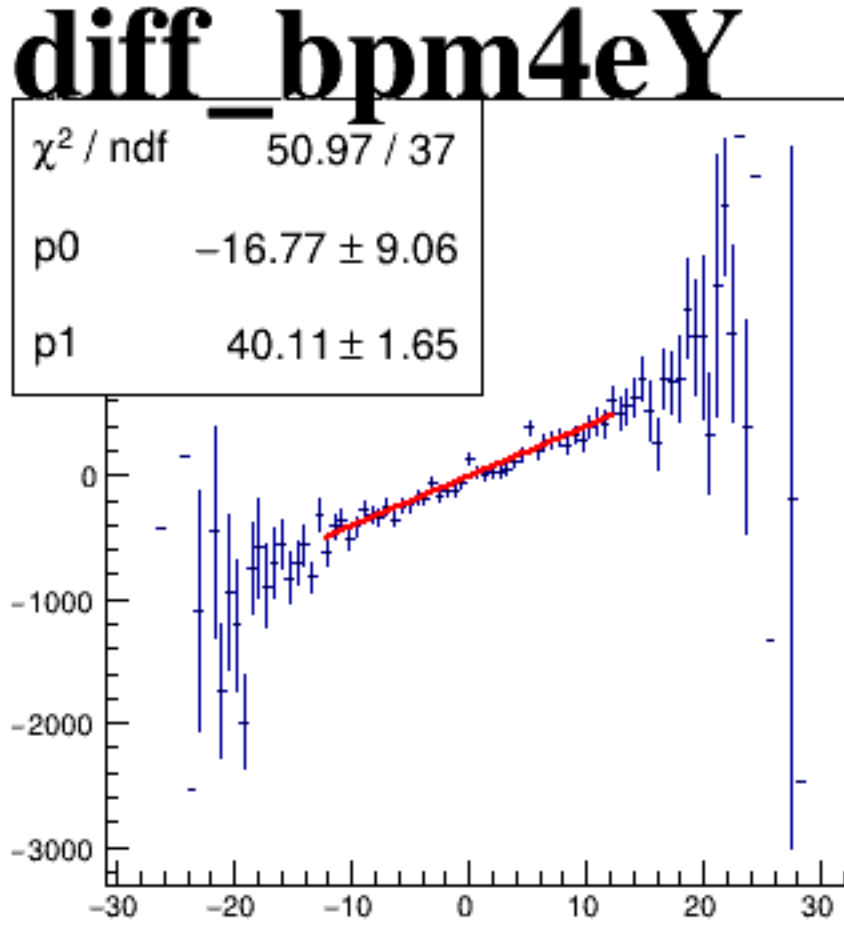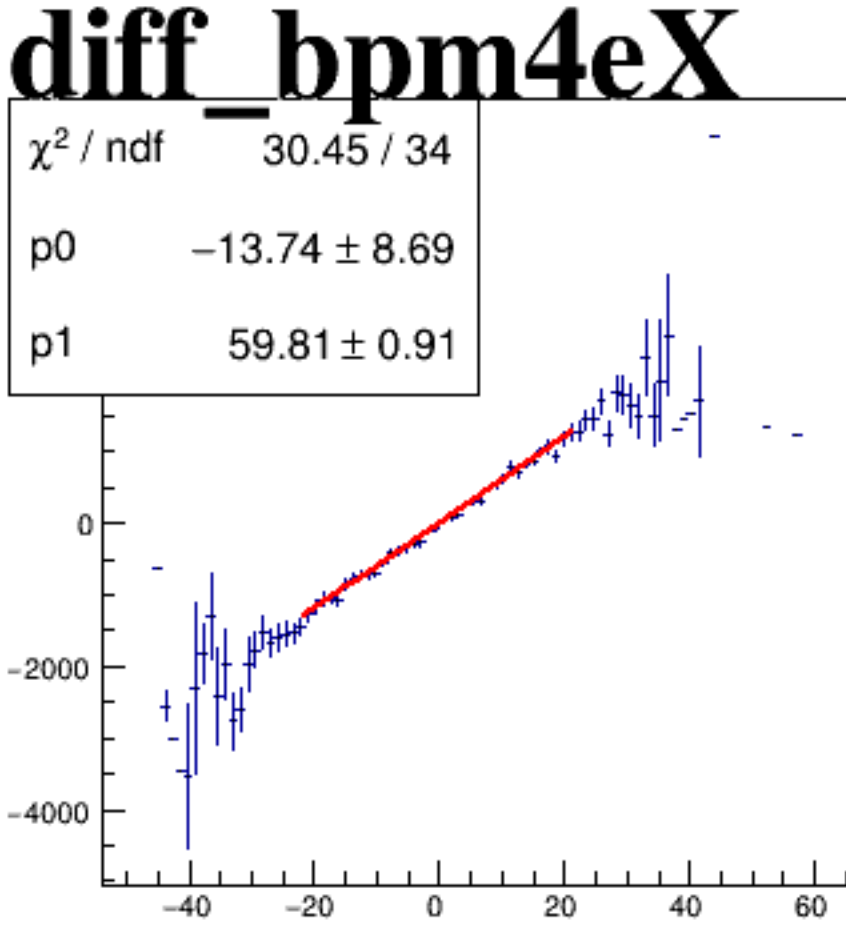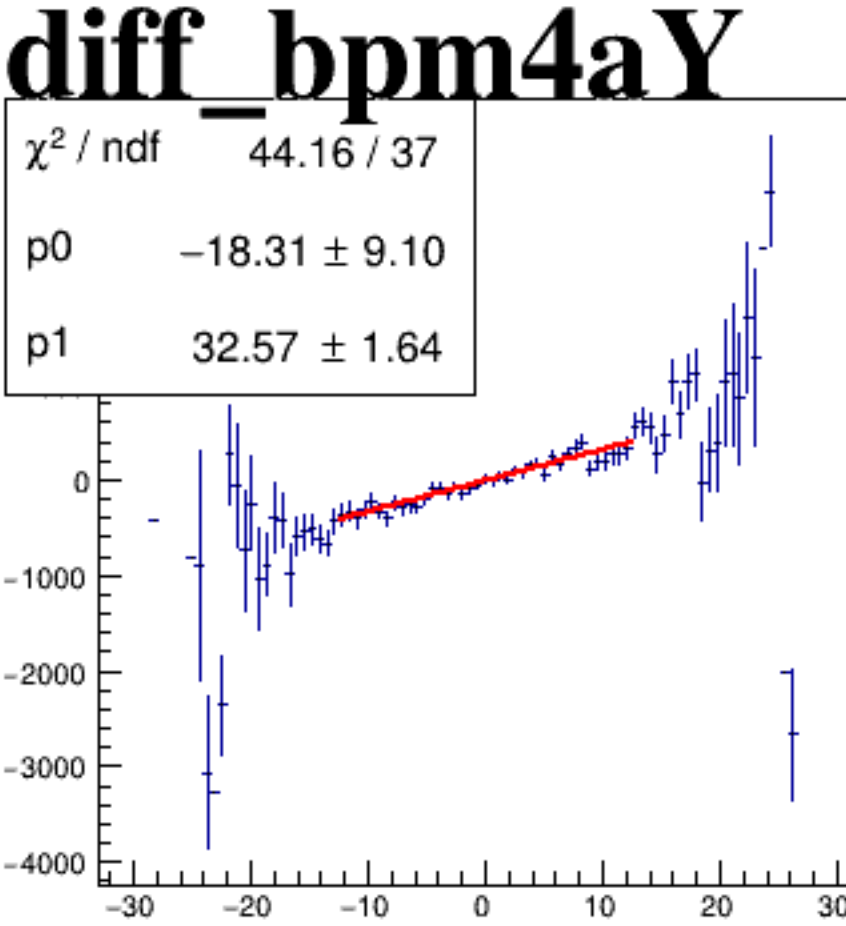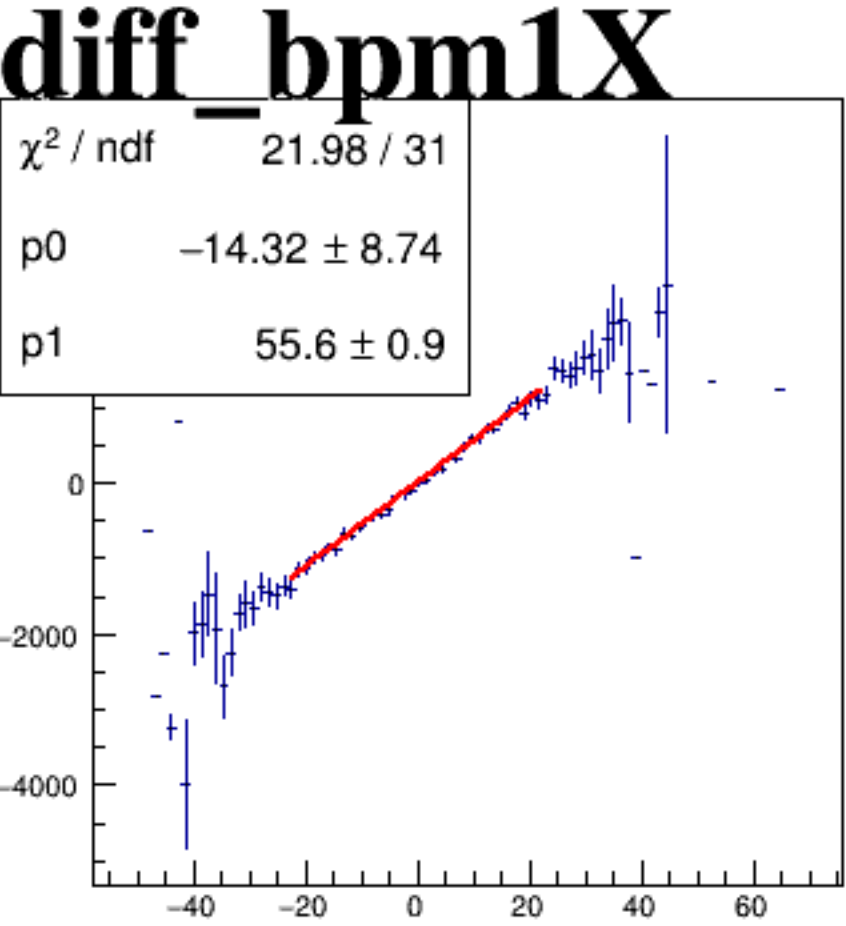






asym_atr1

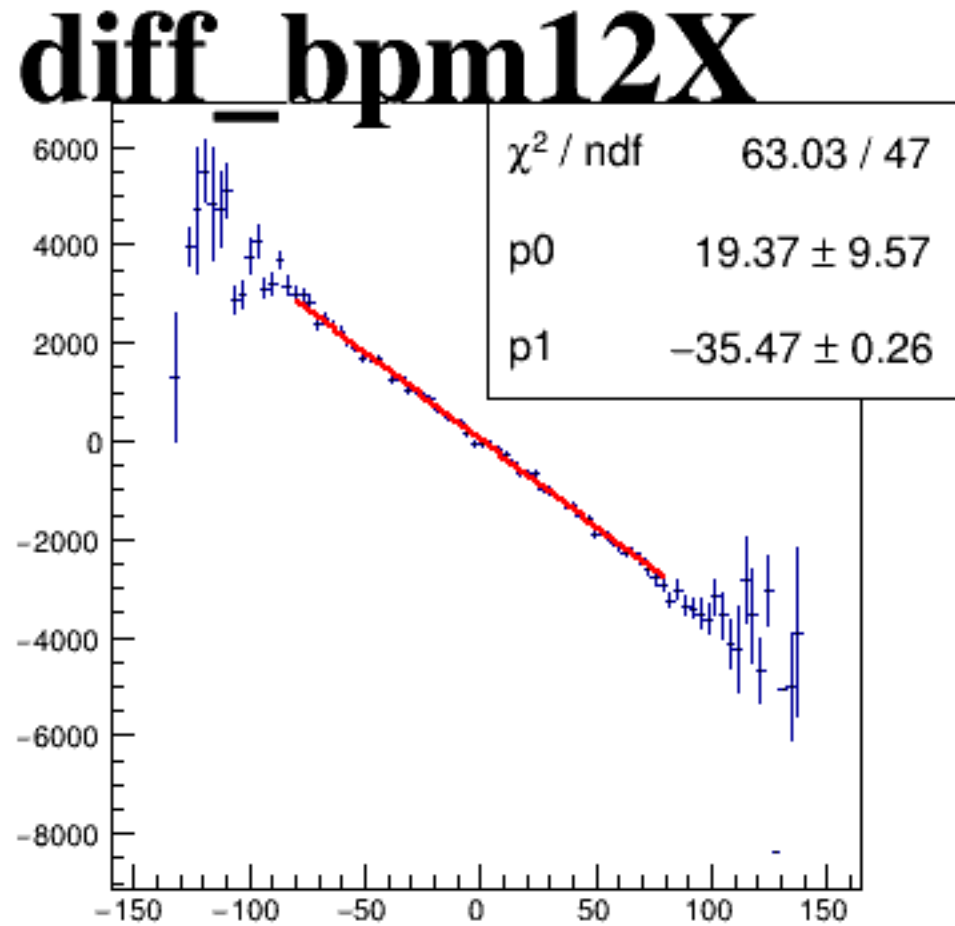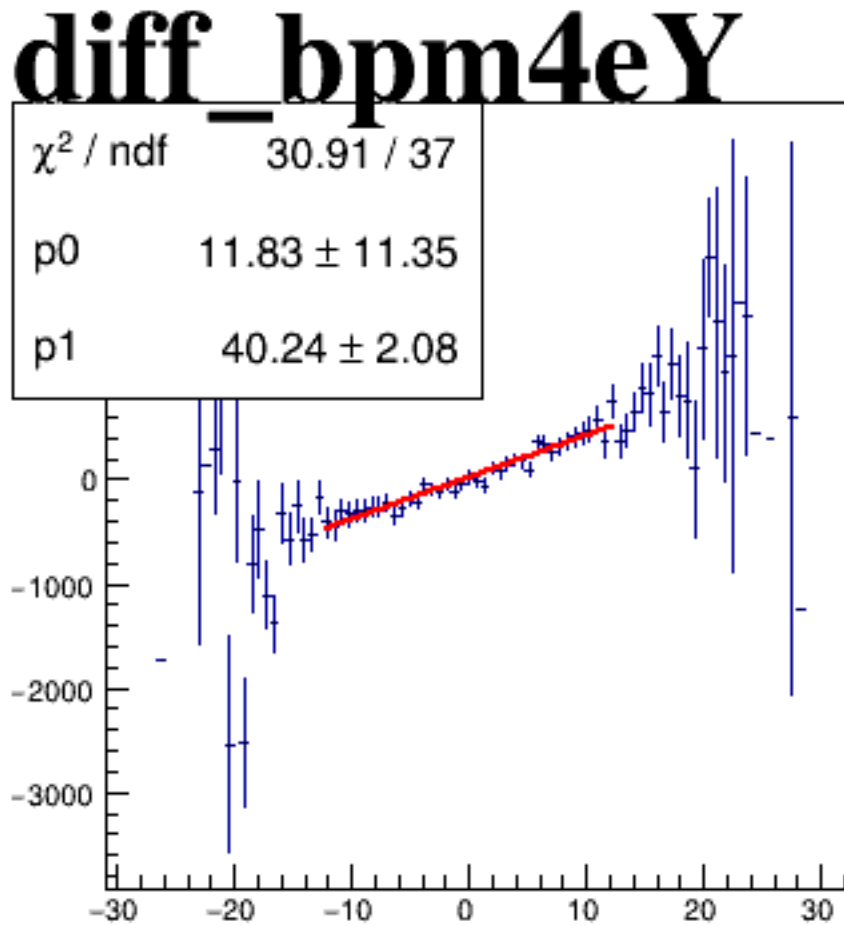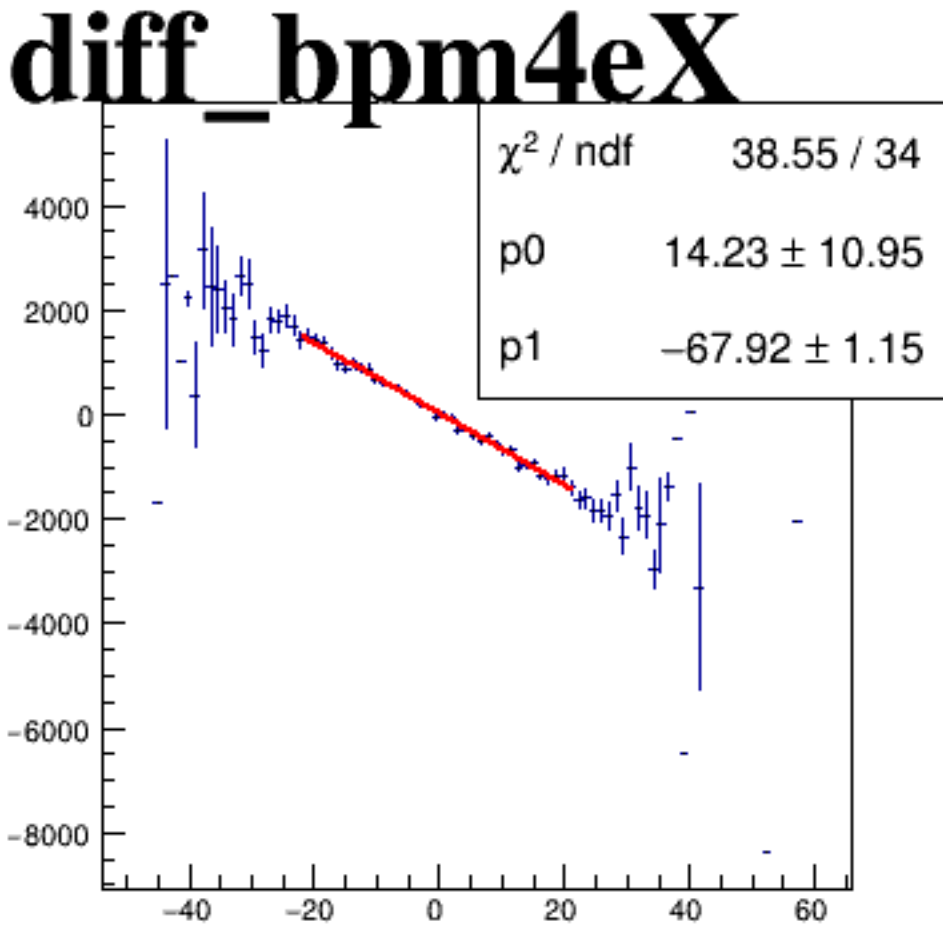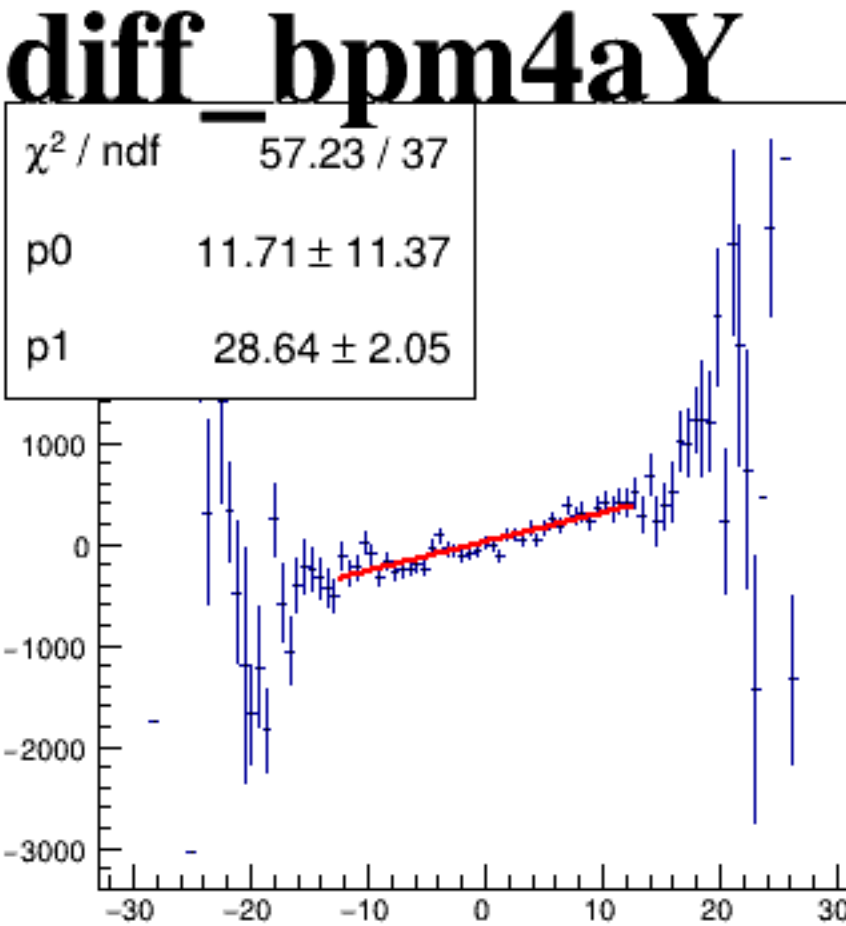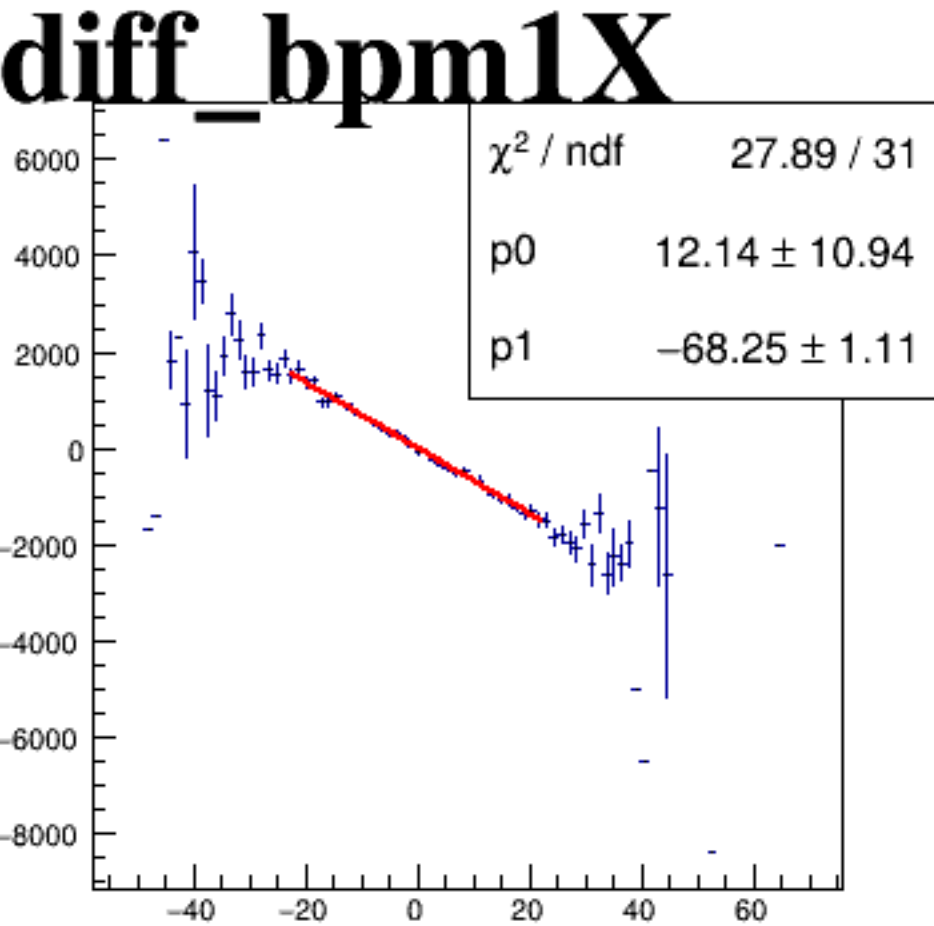


asym_atl2

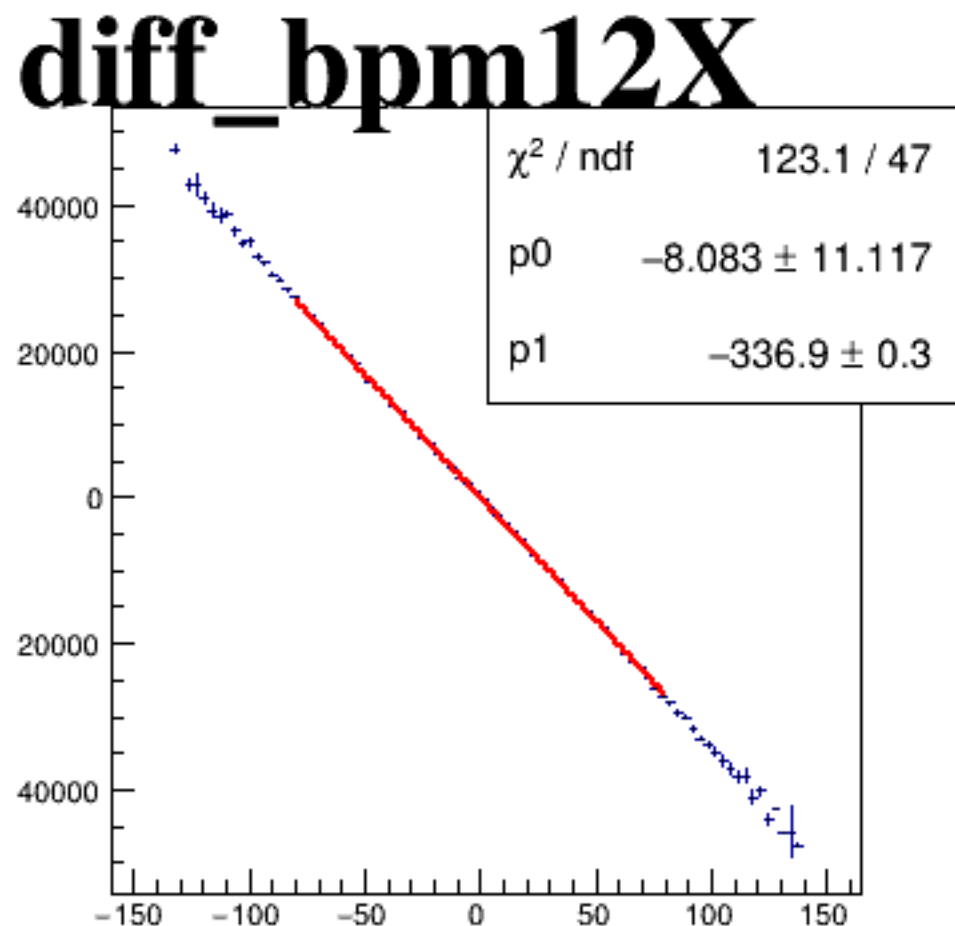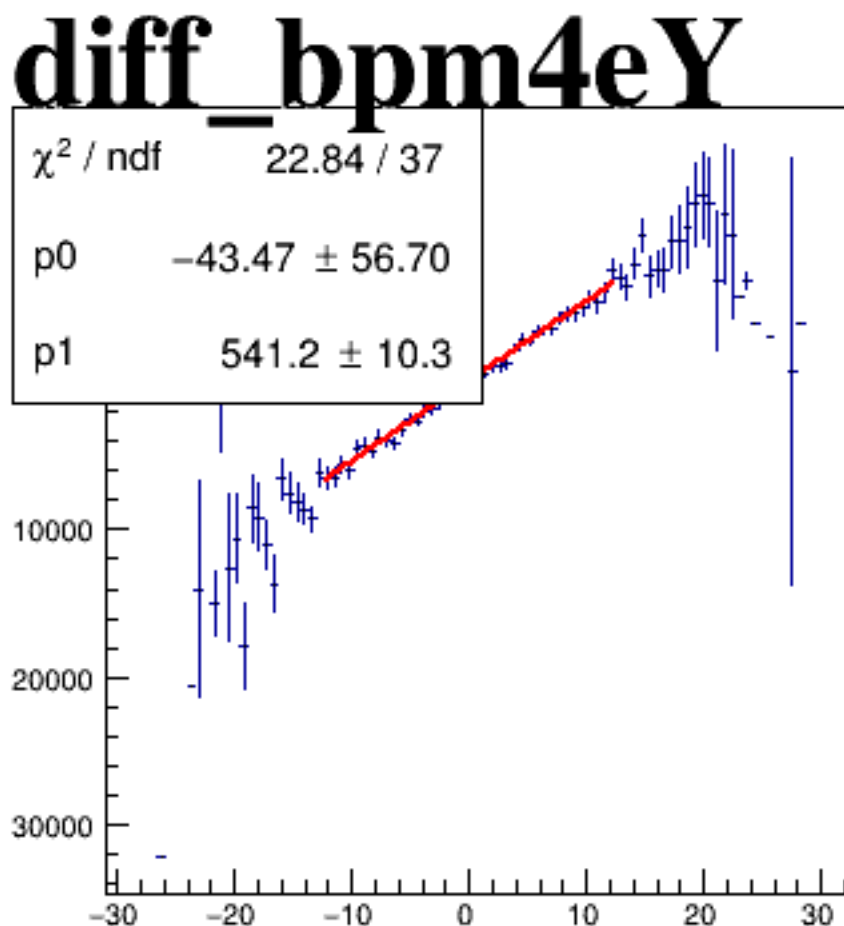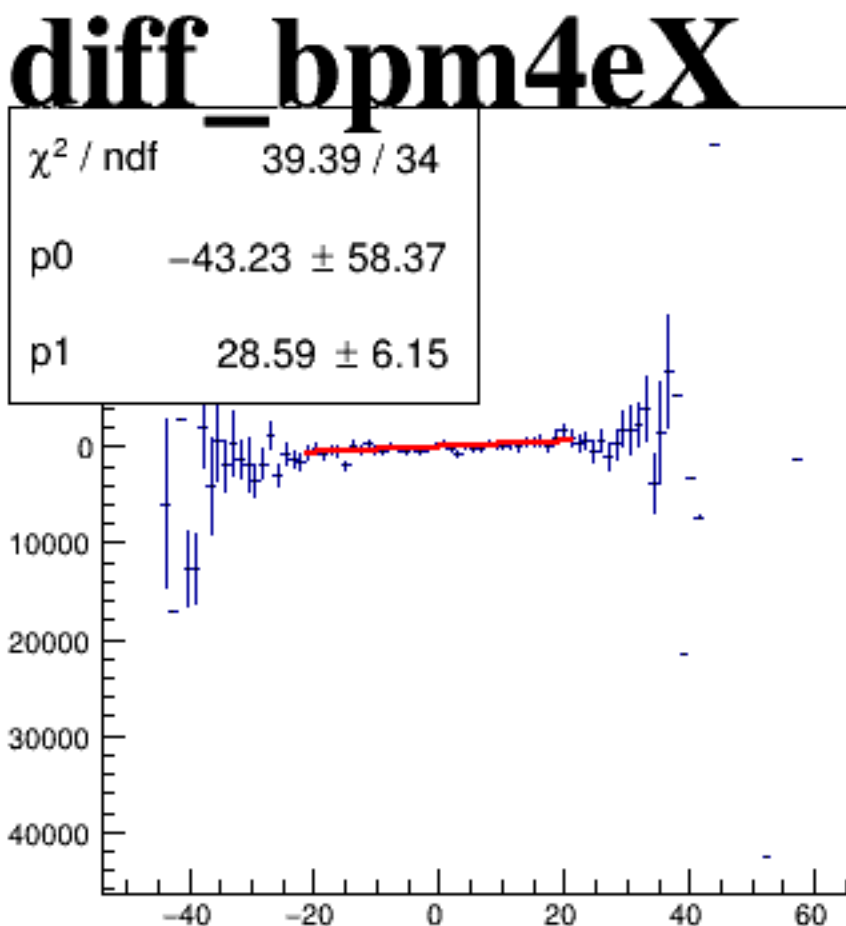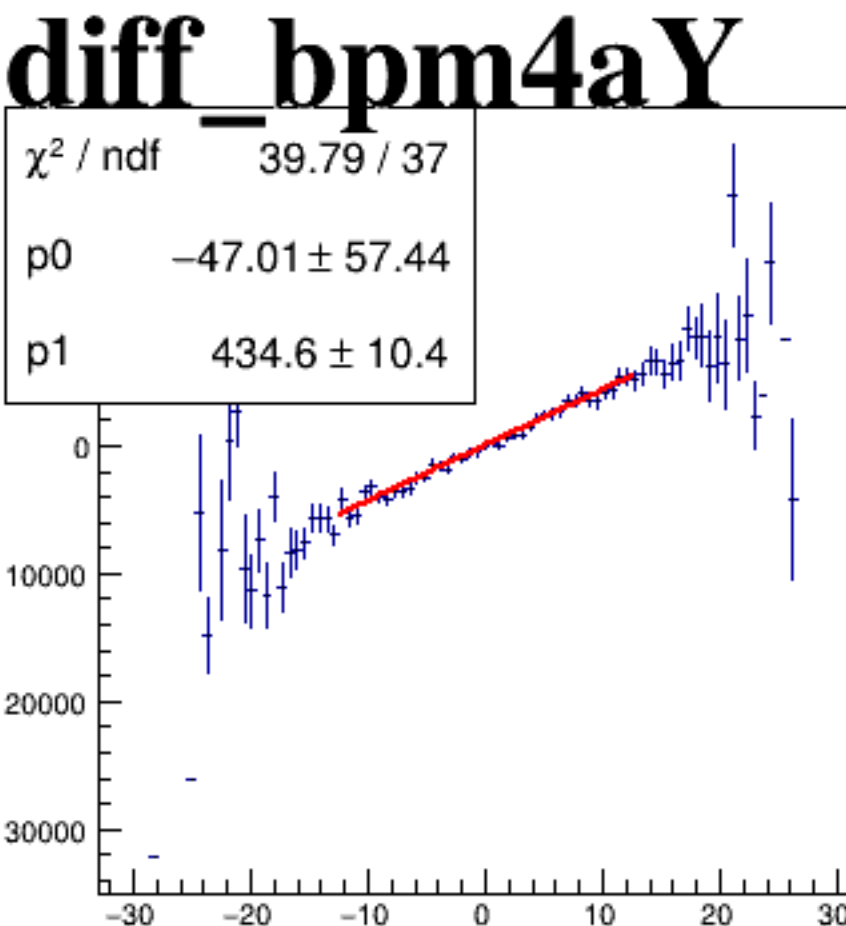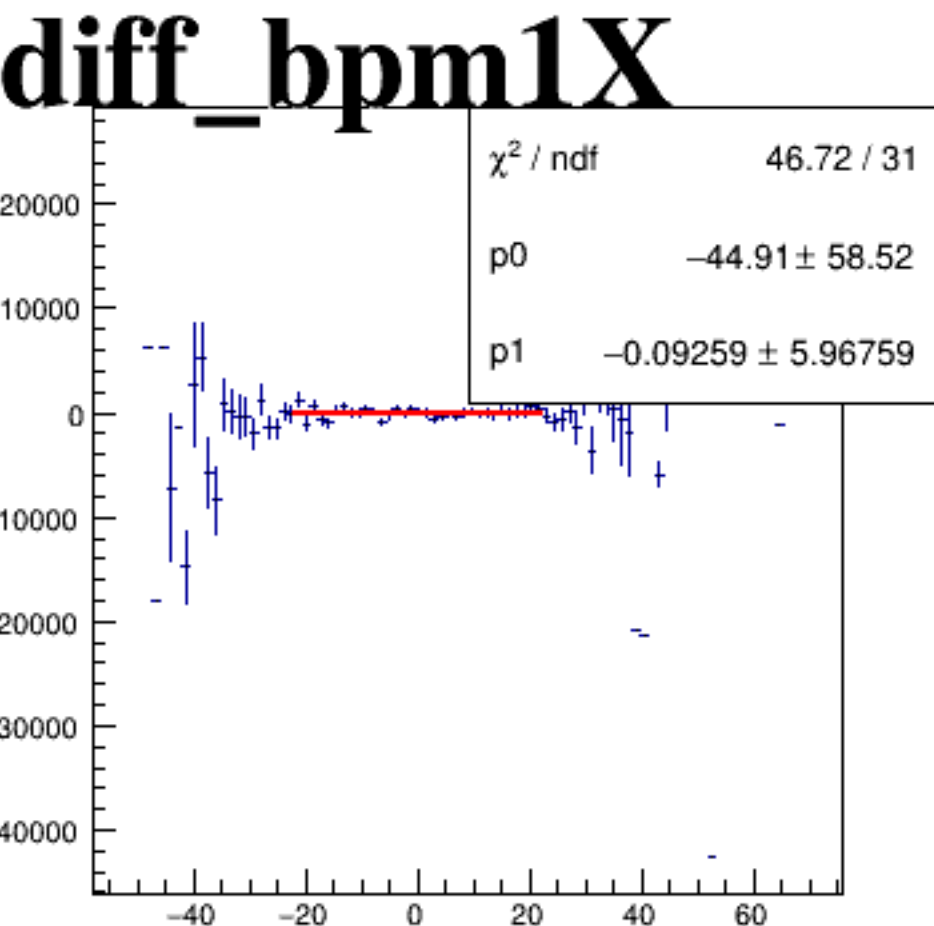


asym_atr2

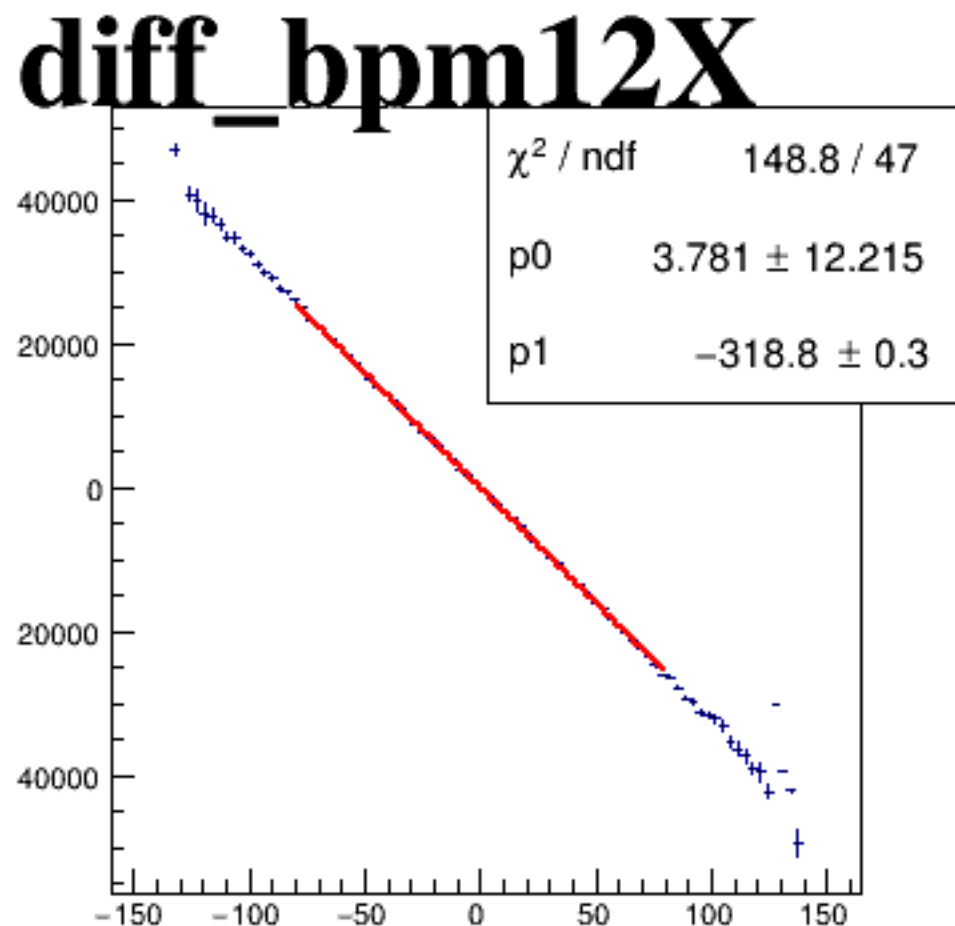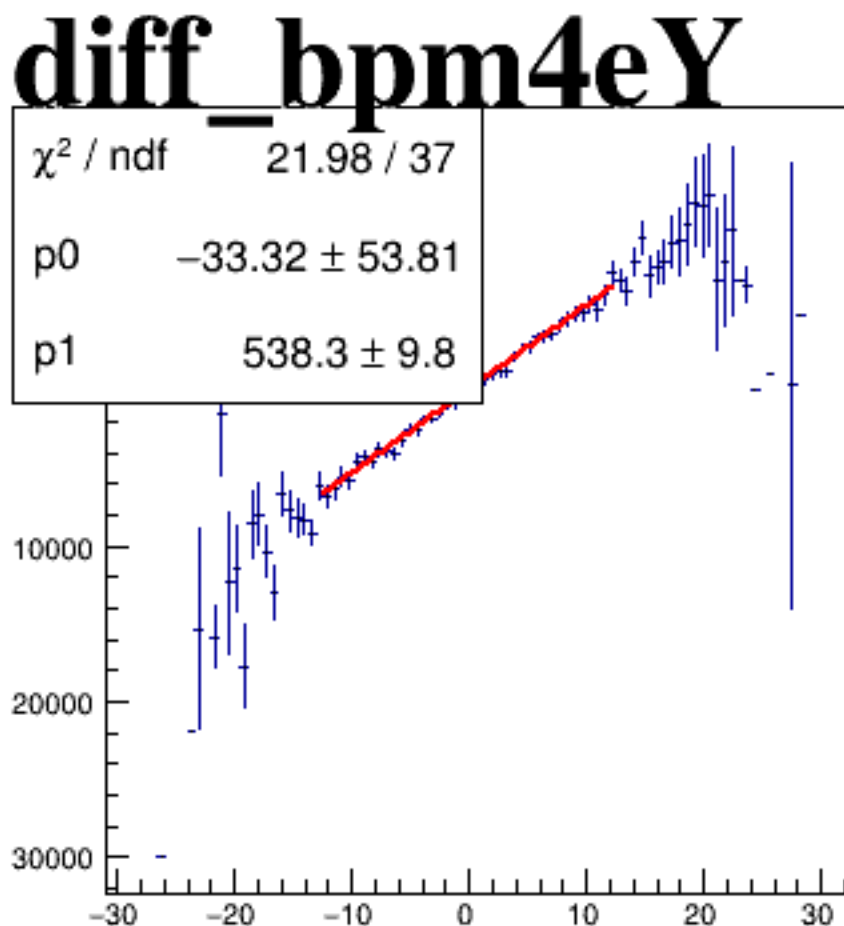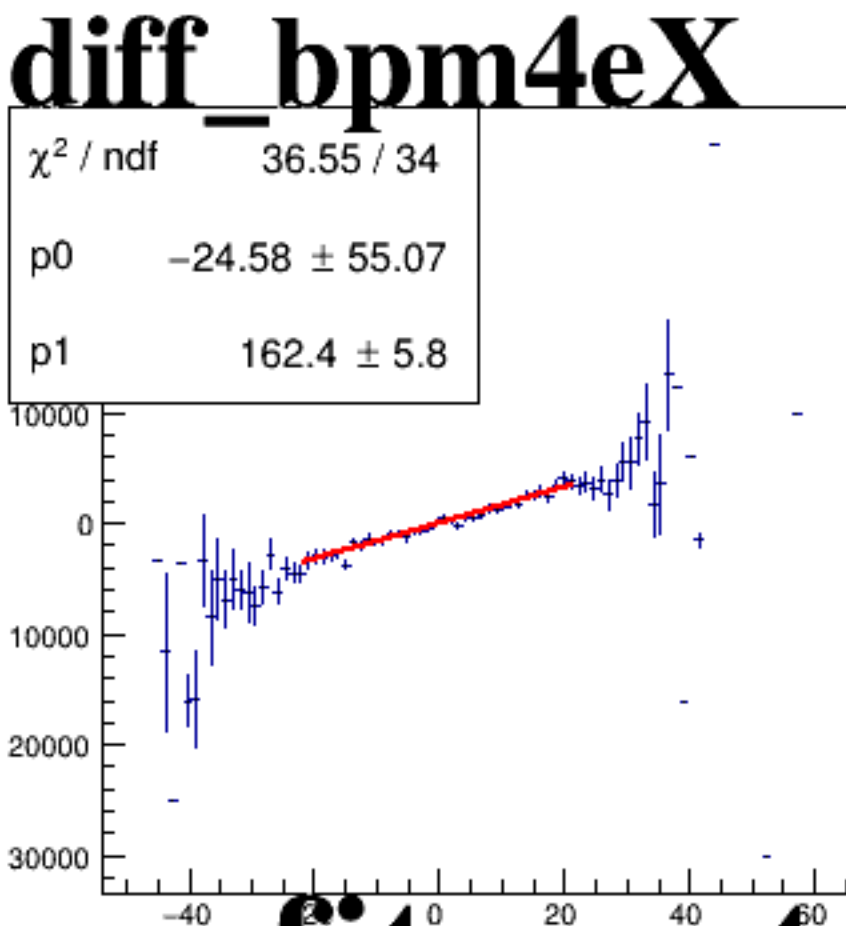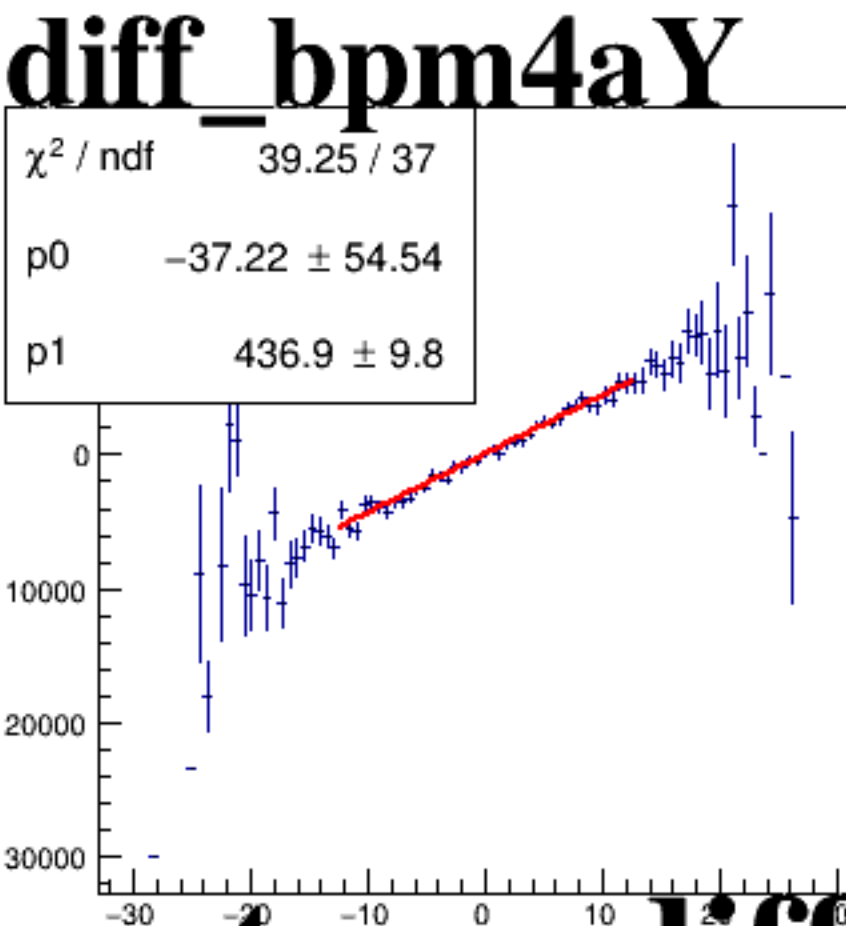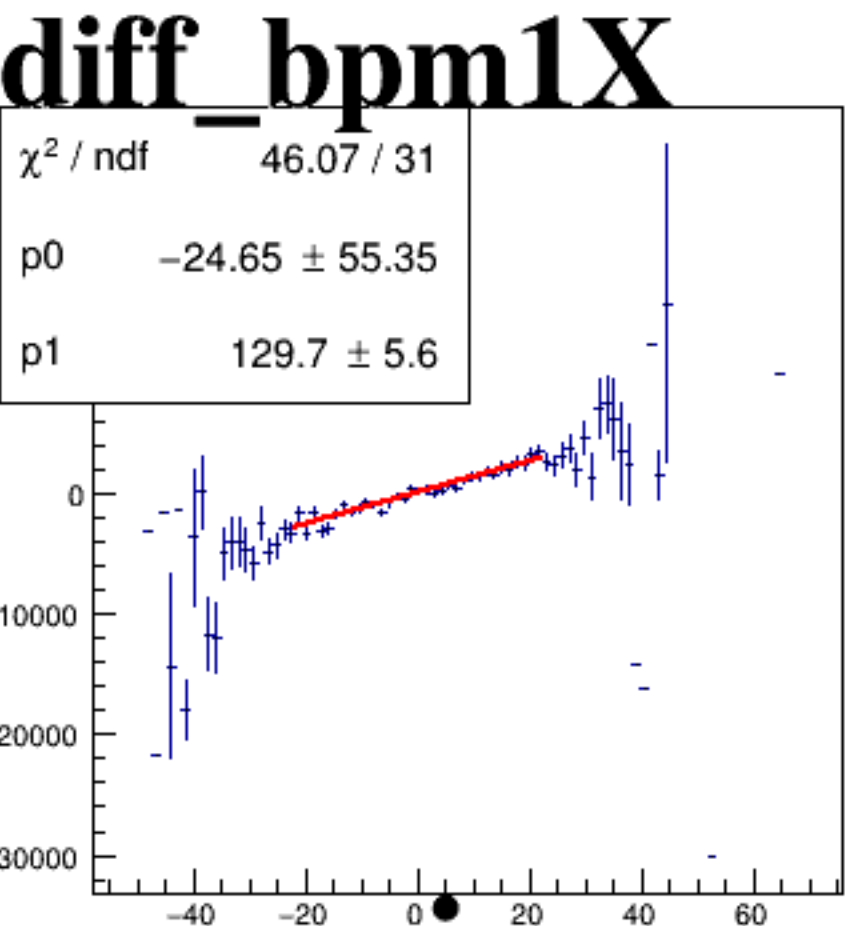


reg_asym_atl1

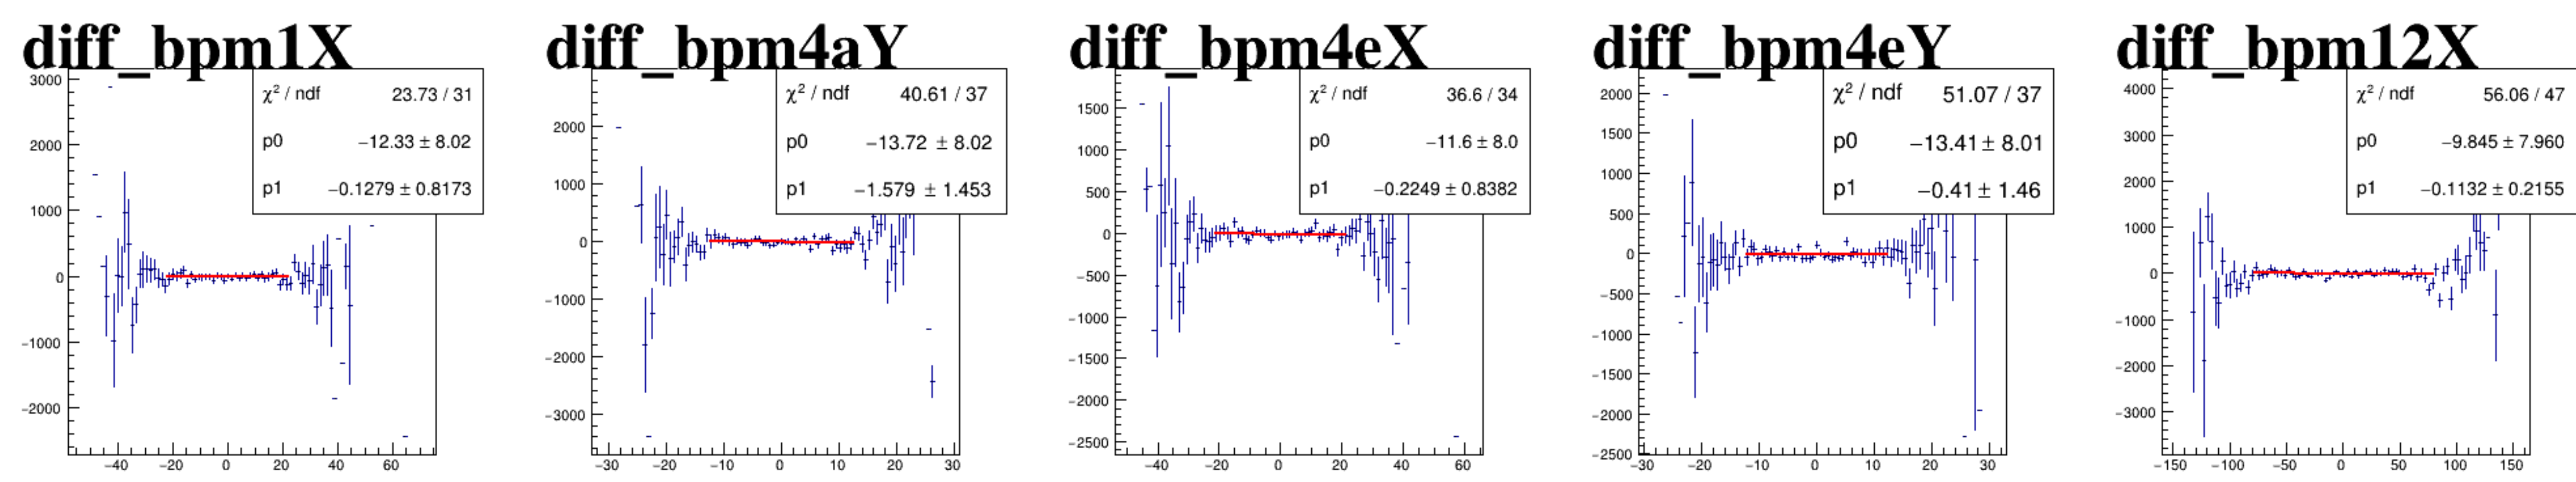


reg_asym_atr1

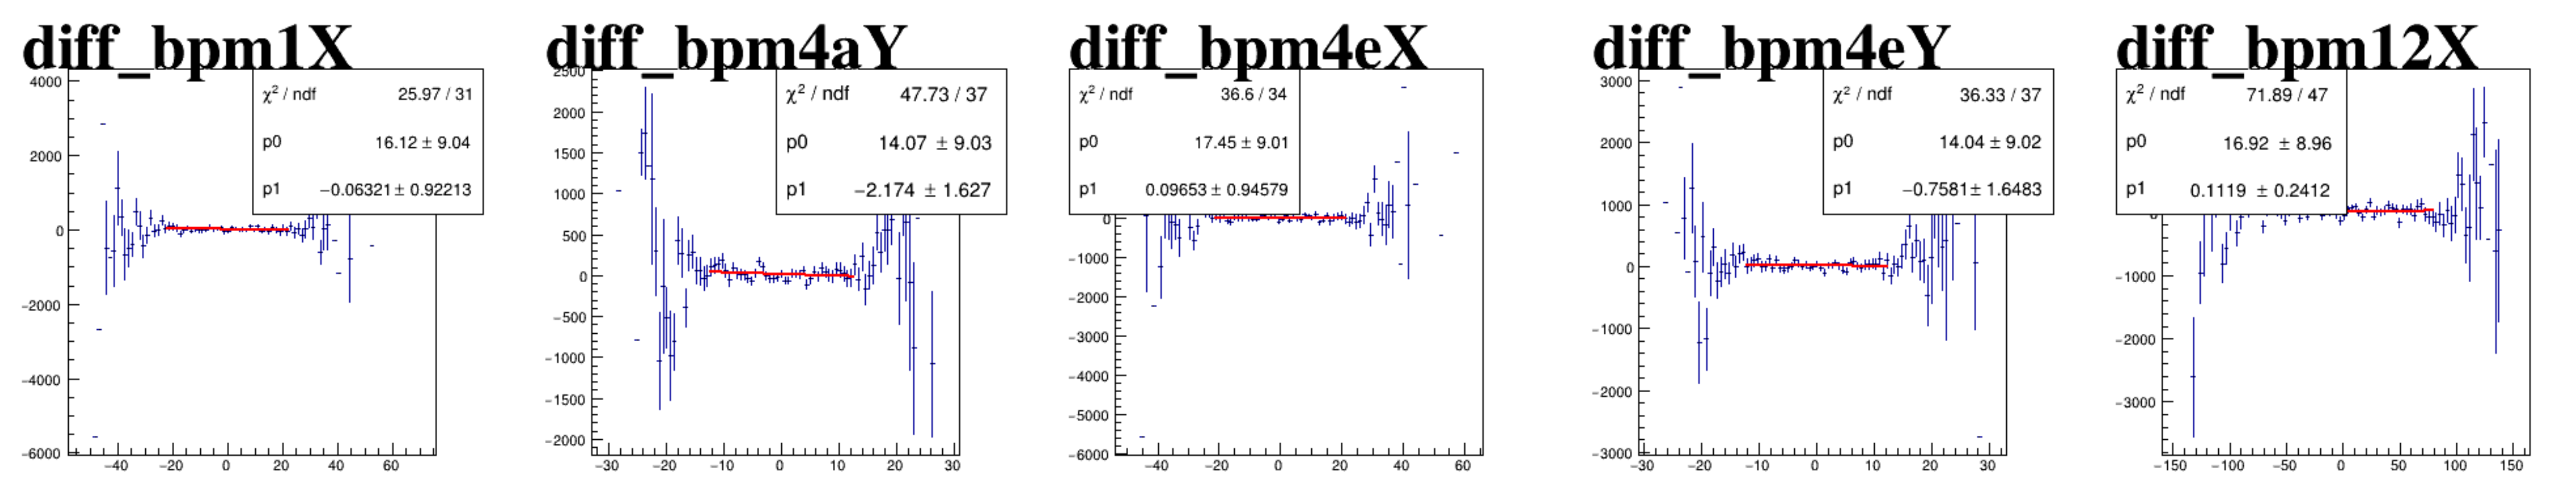






reg_asym_atl2

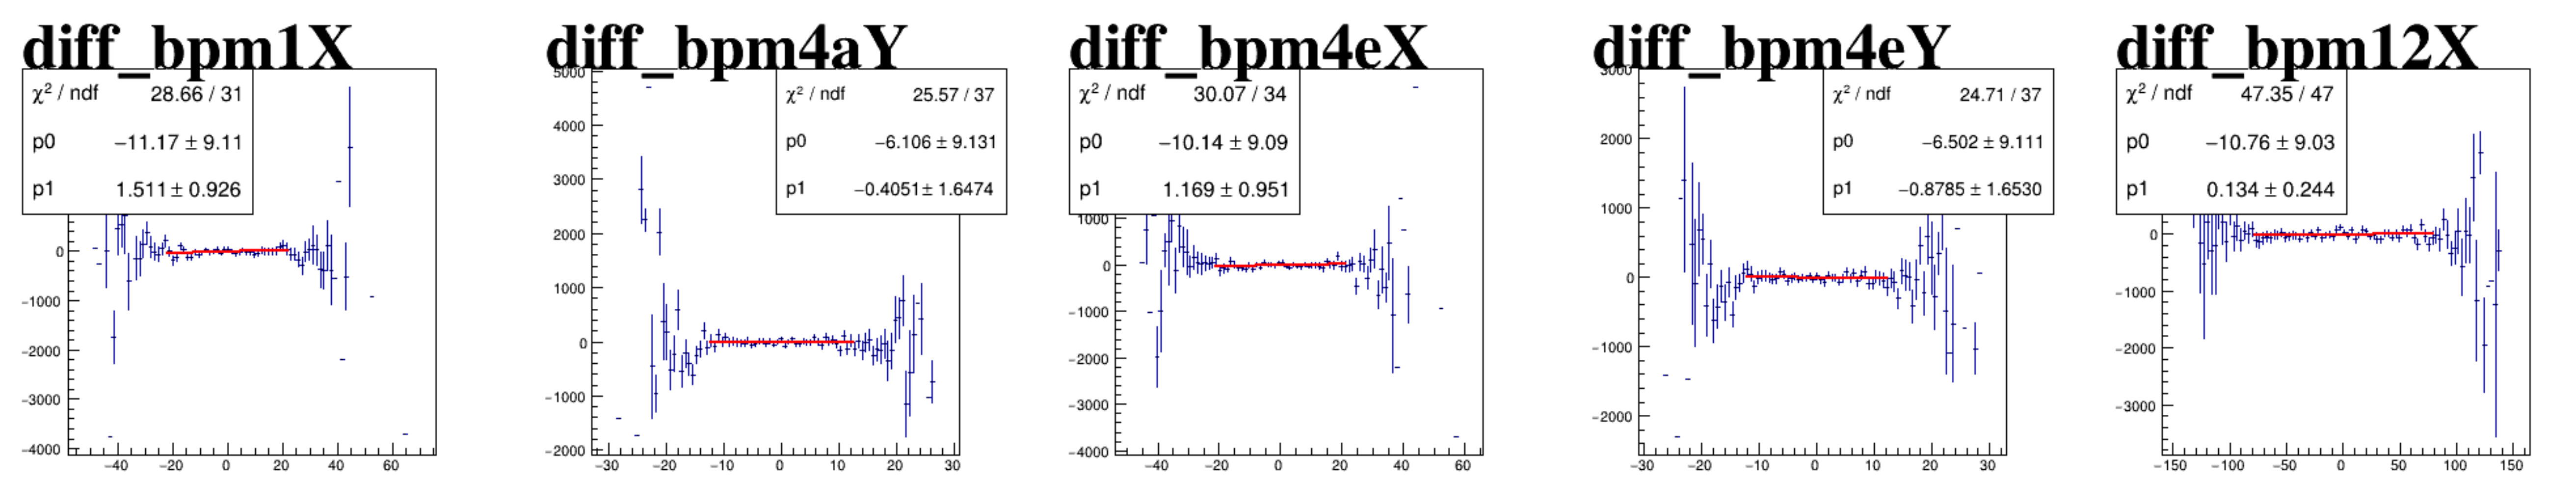






reg_asym_atr2

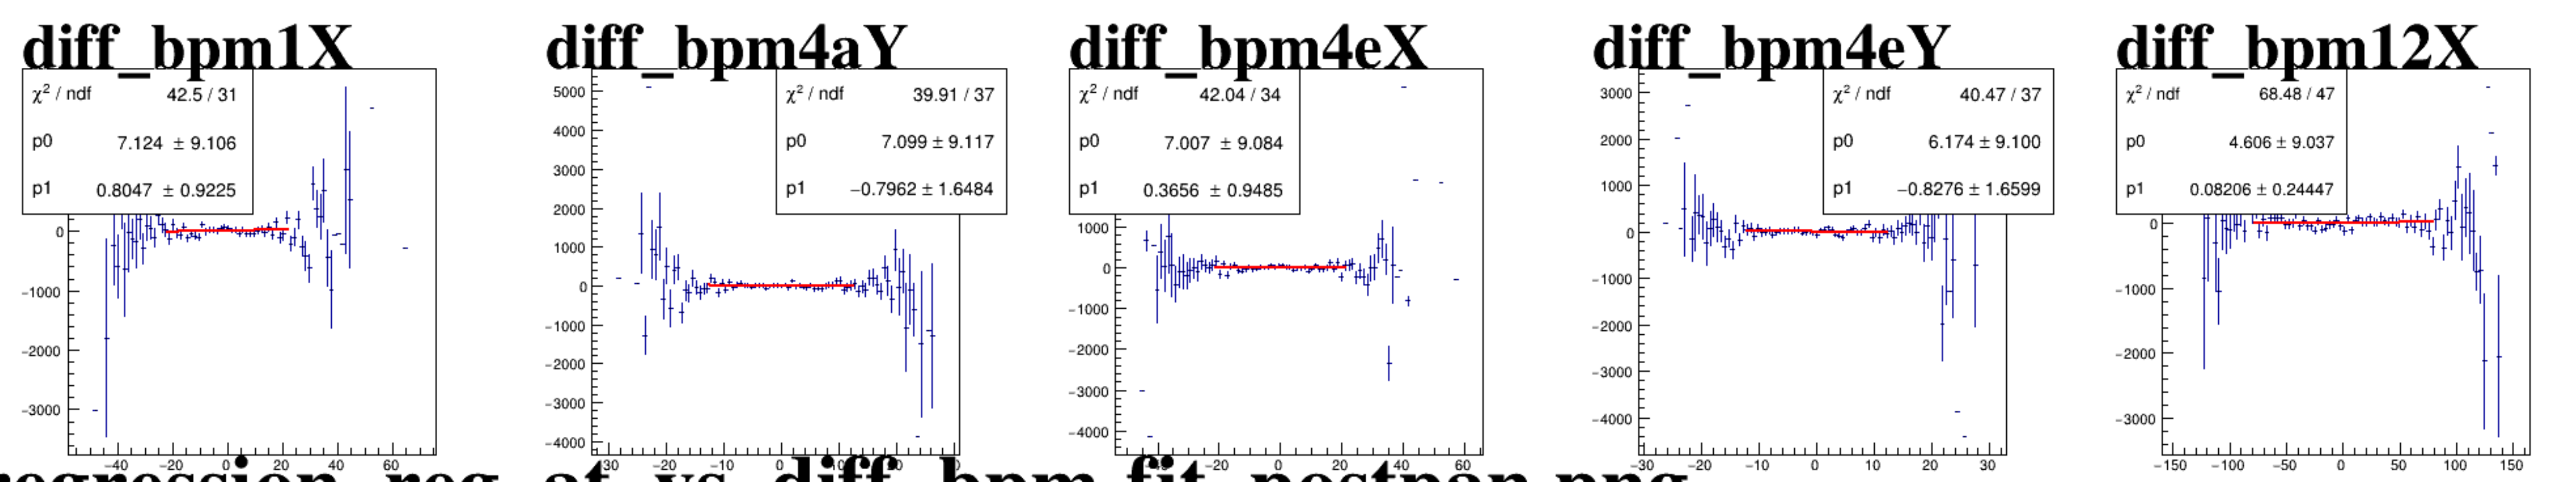






asym_atl1

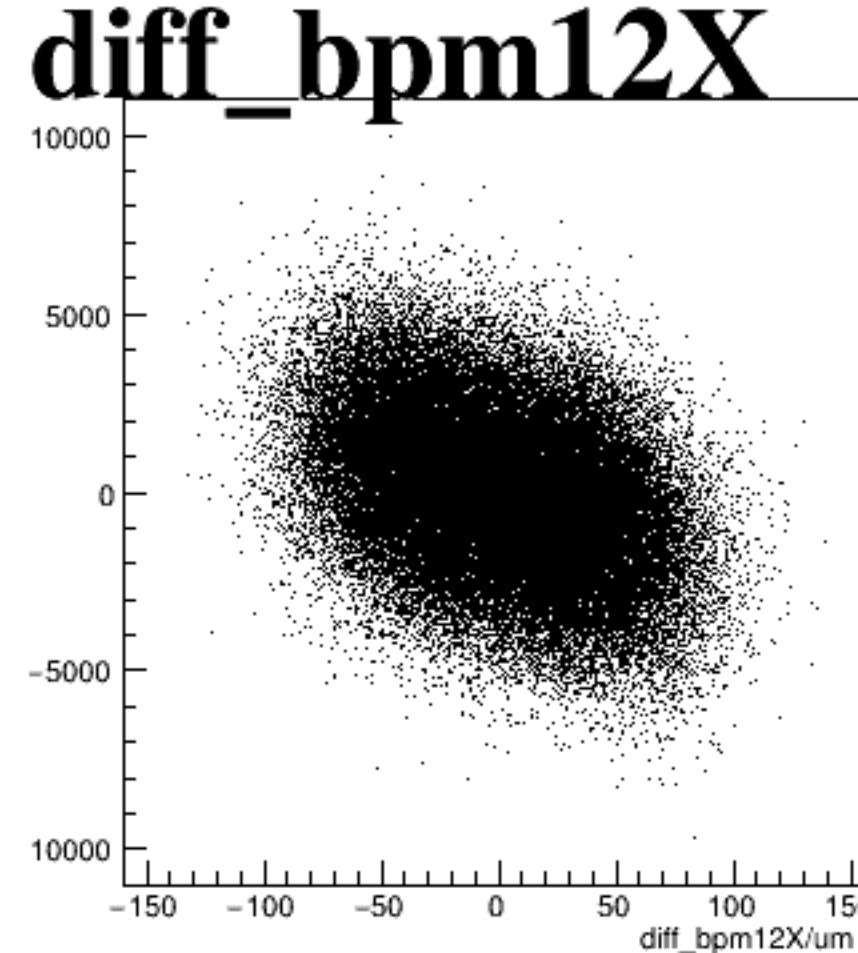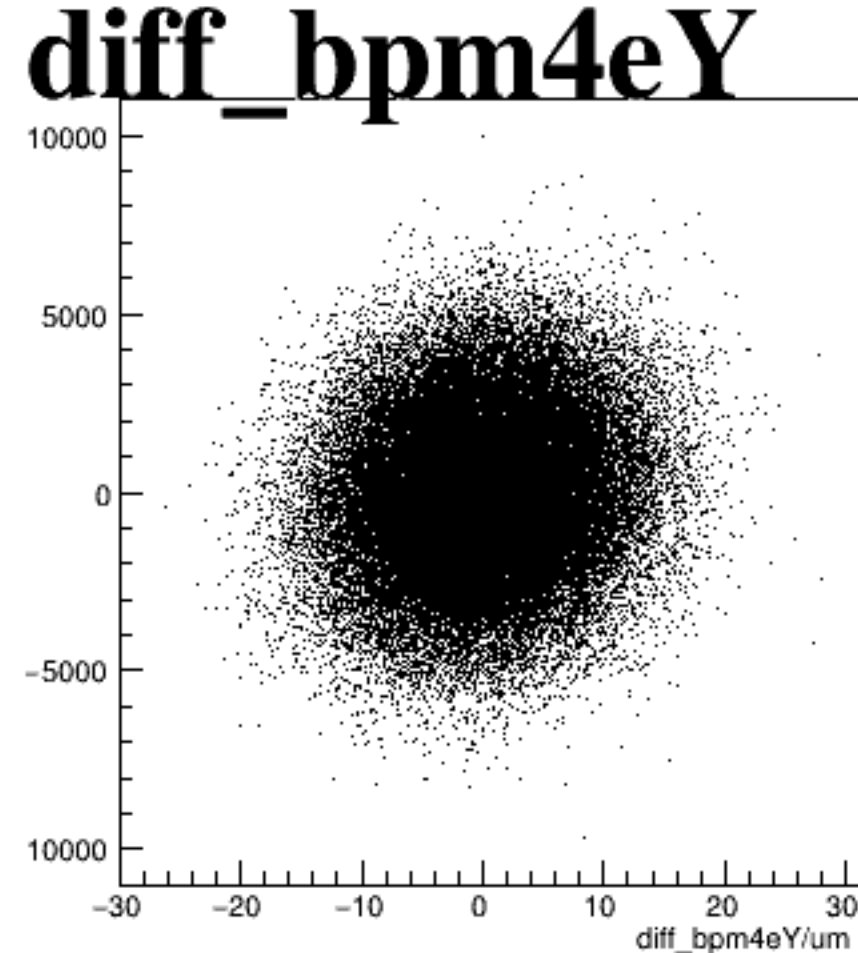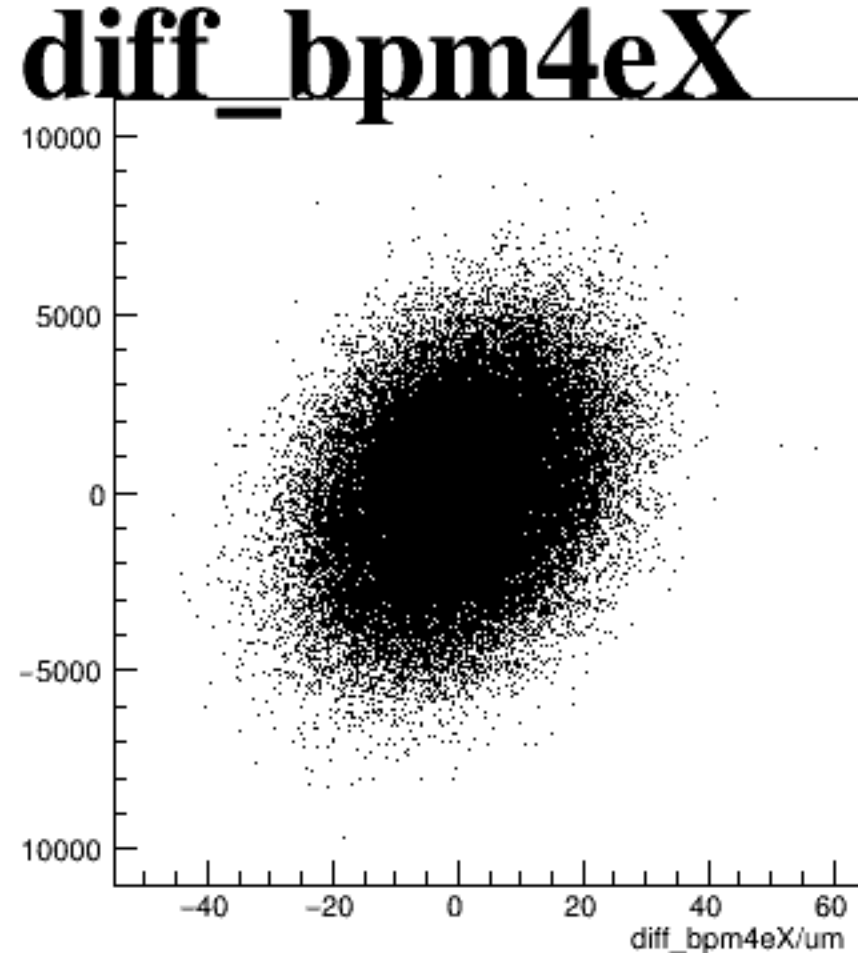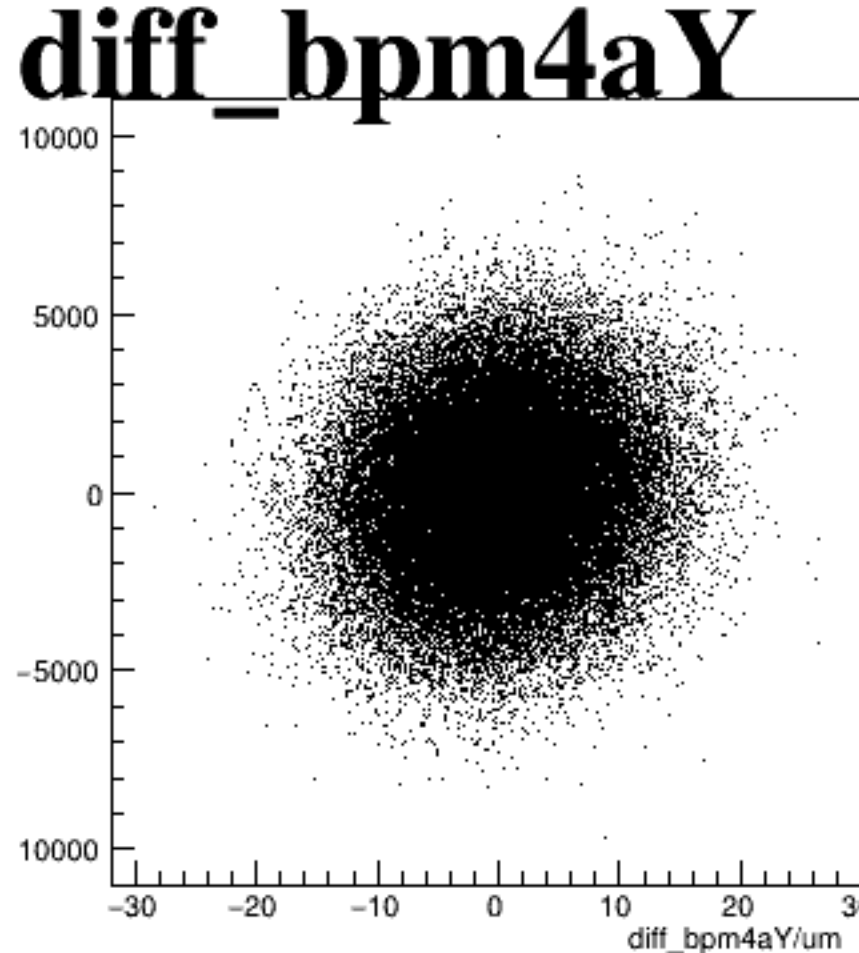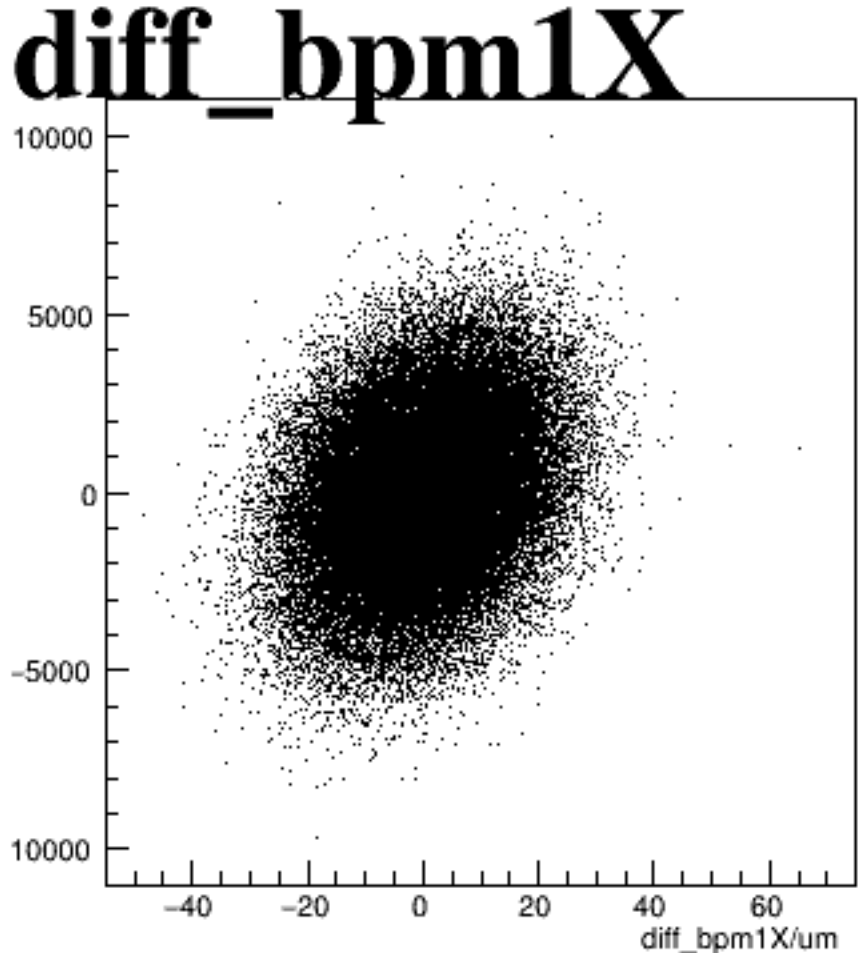






asym_atr1

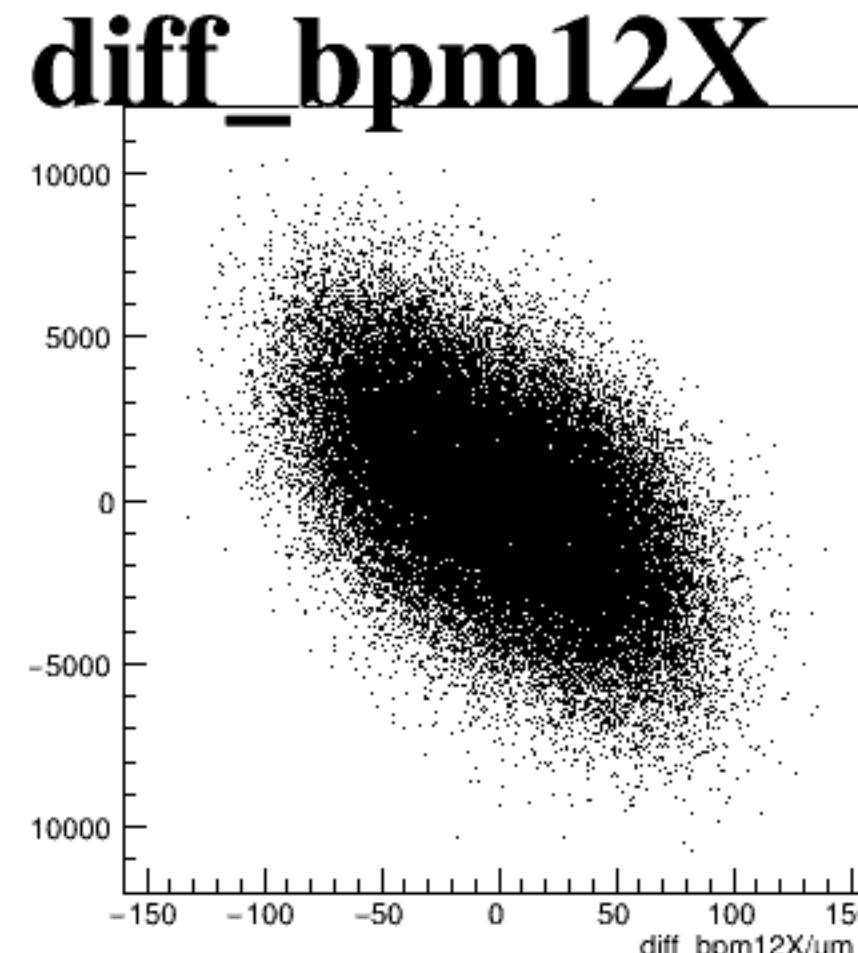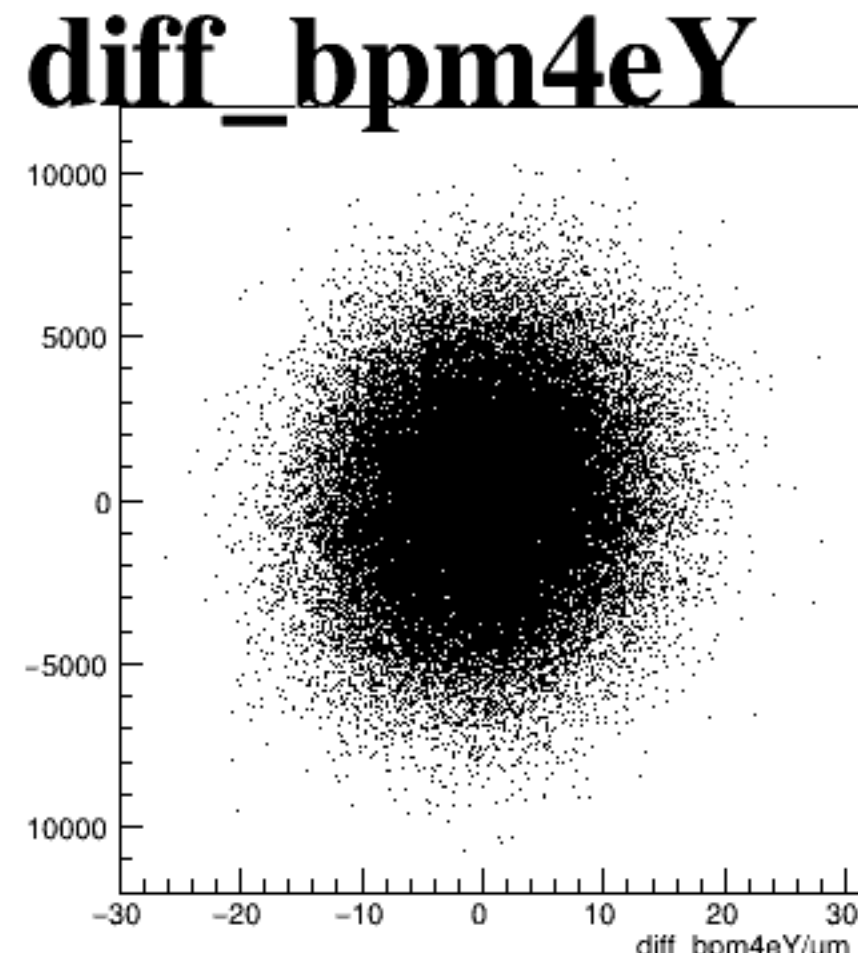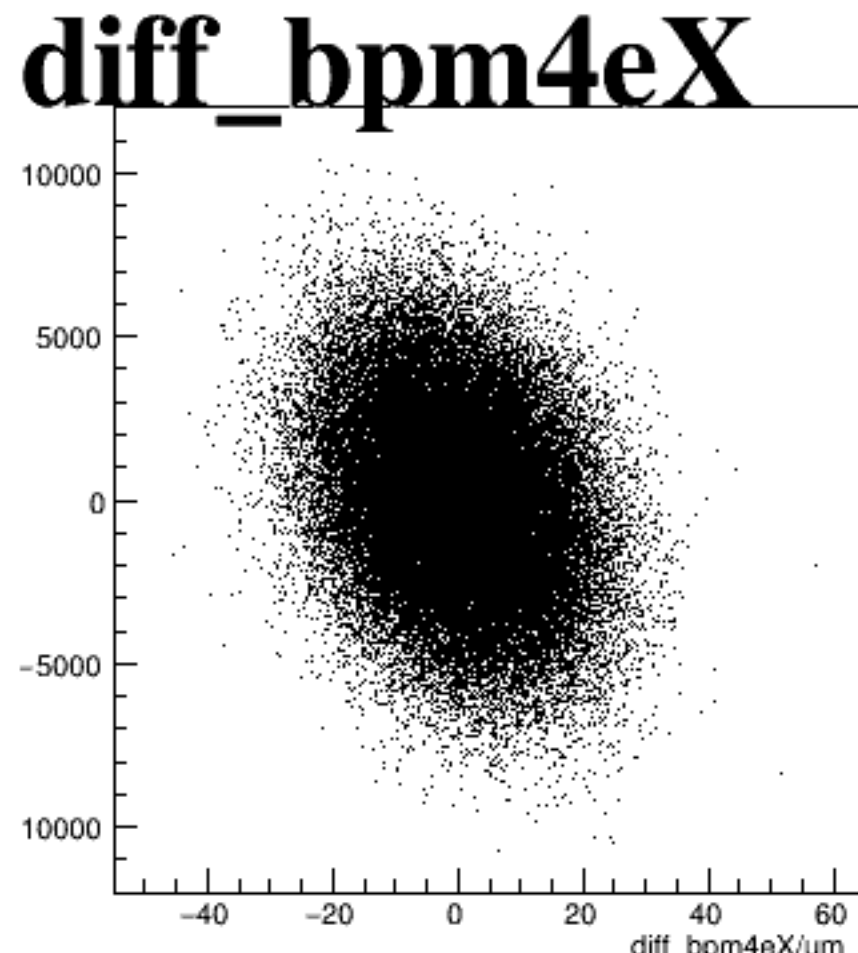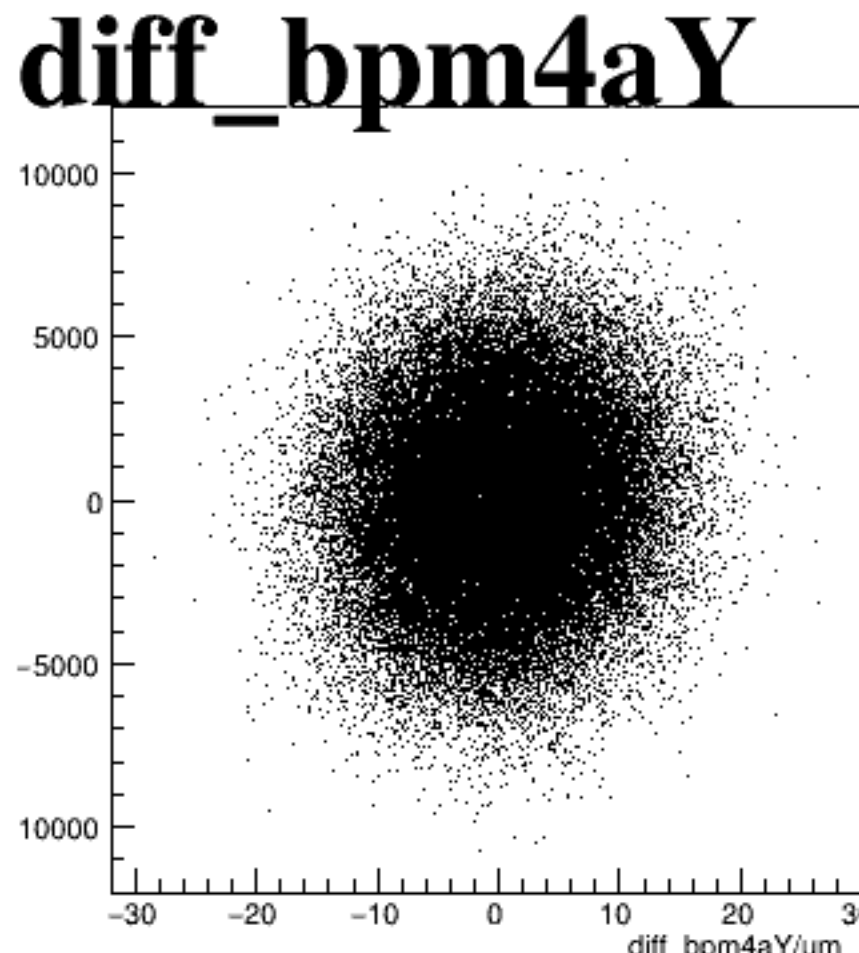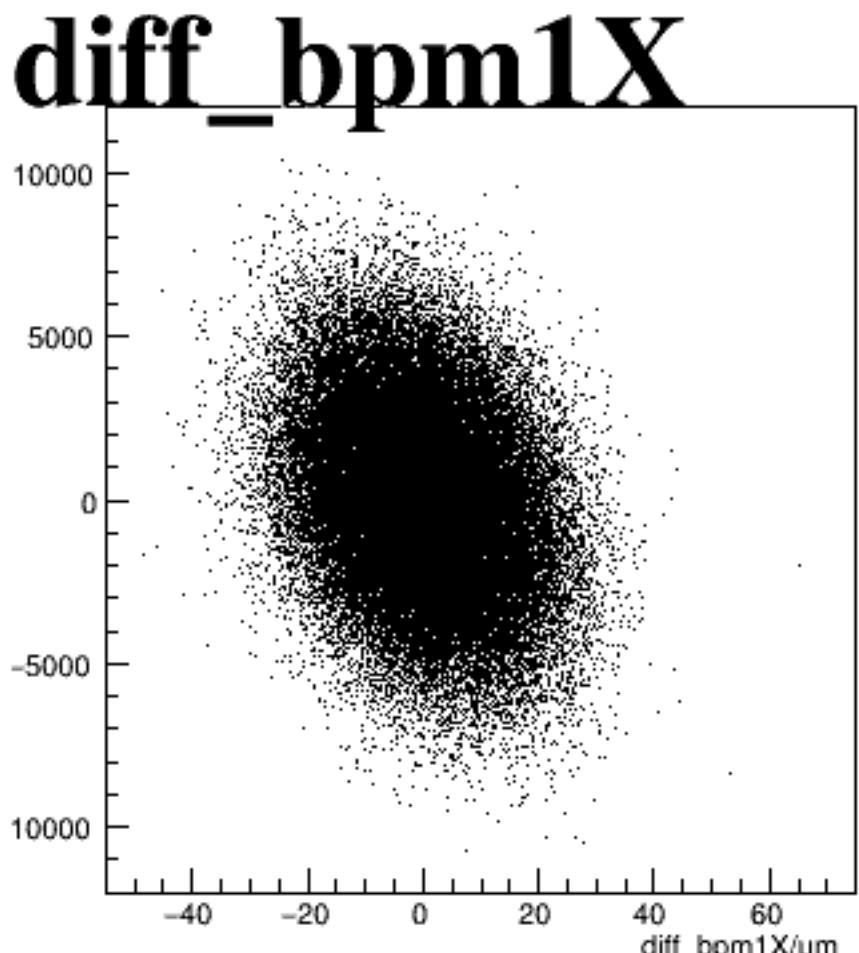

asym_atl2

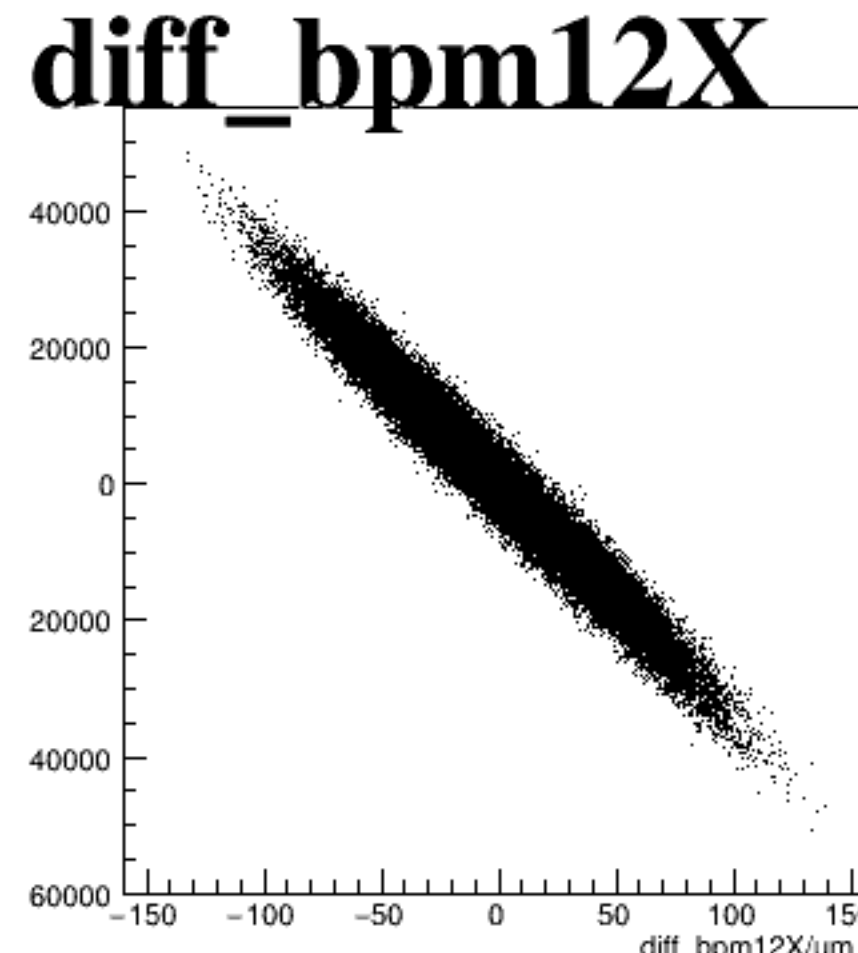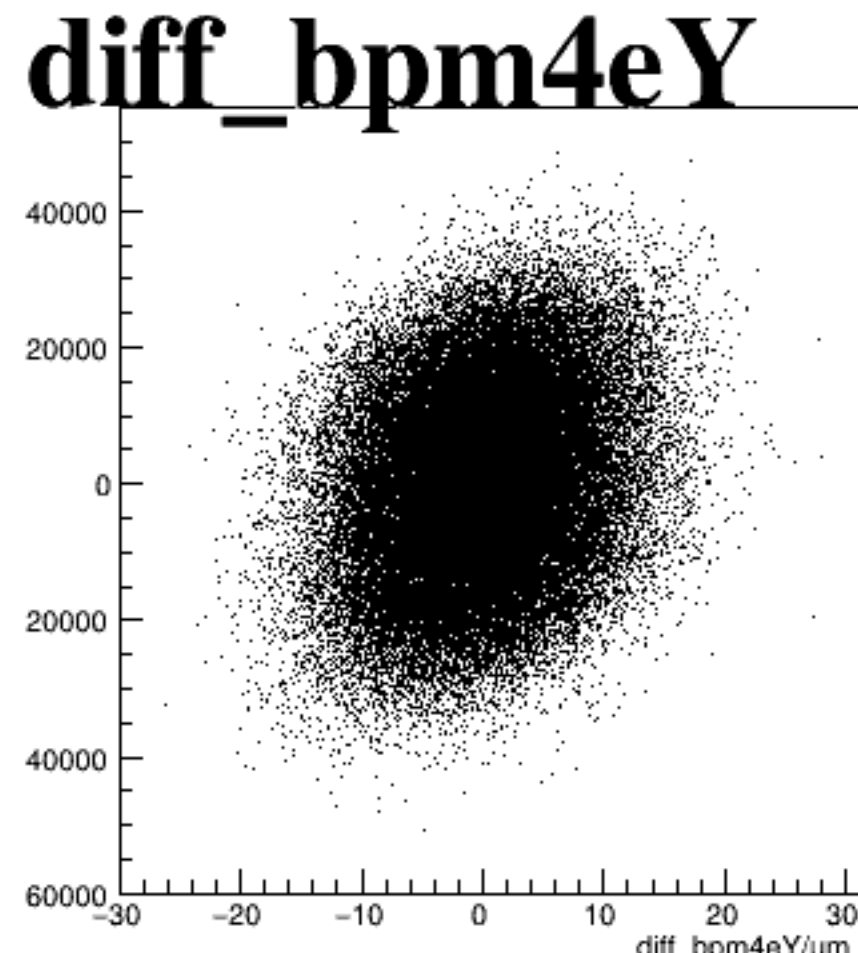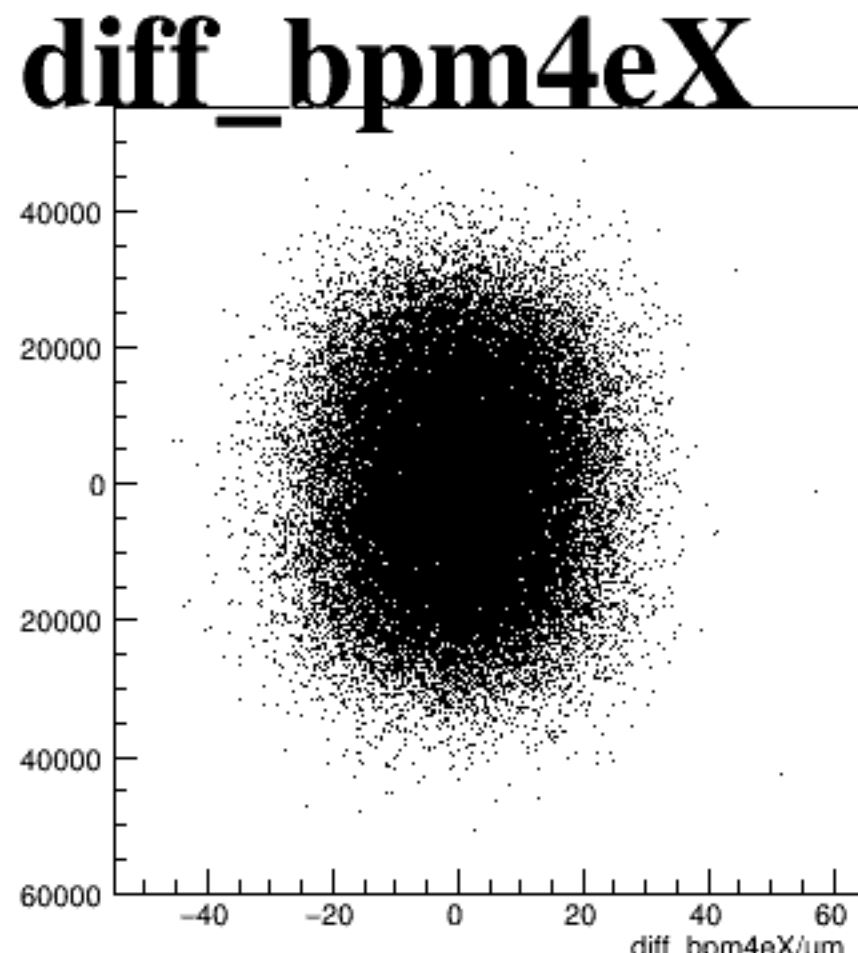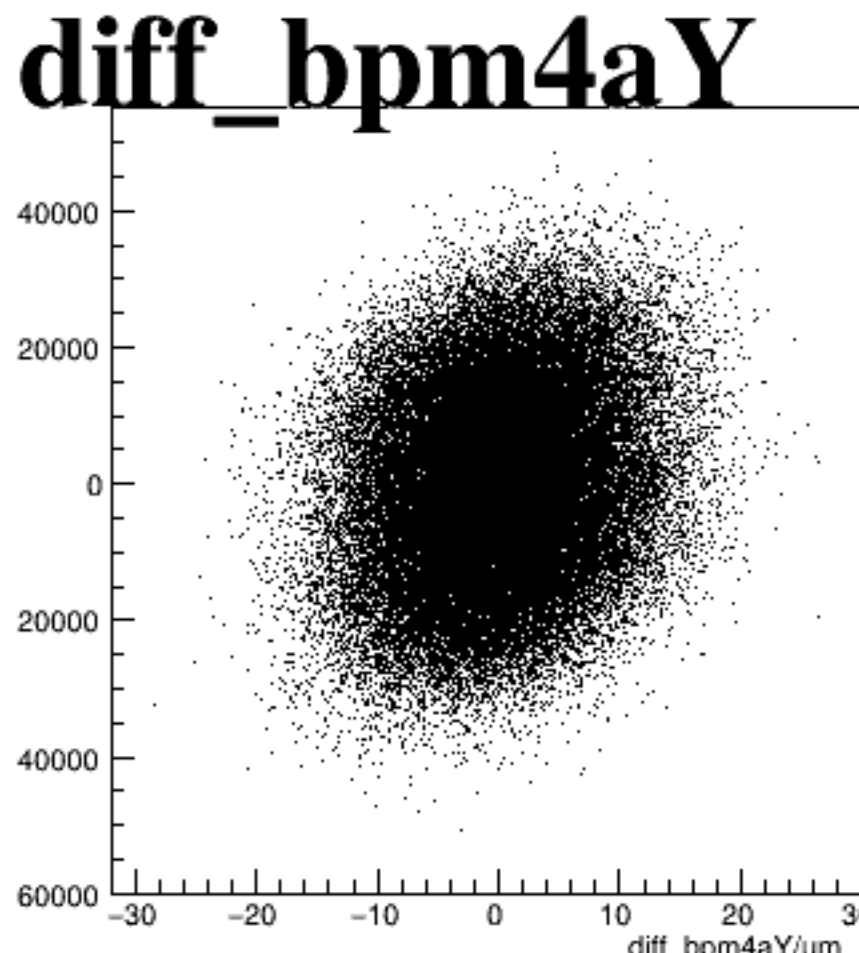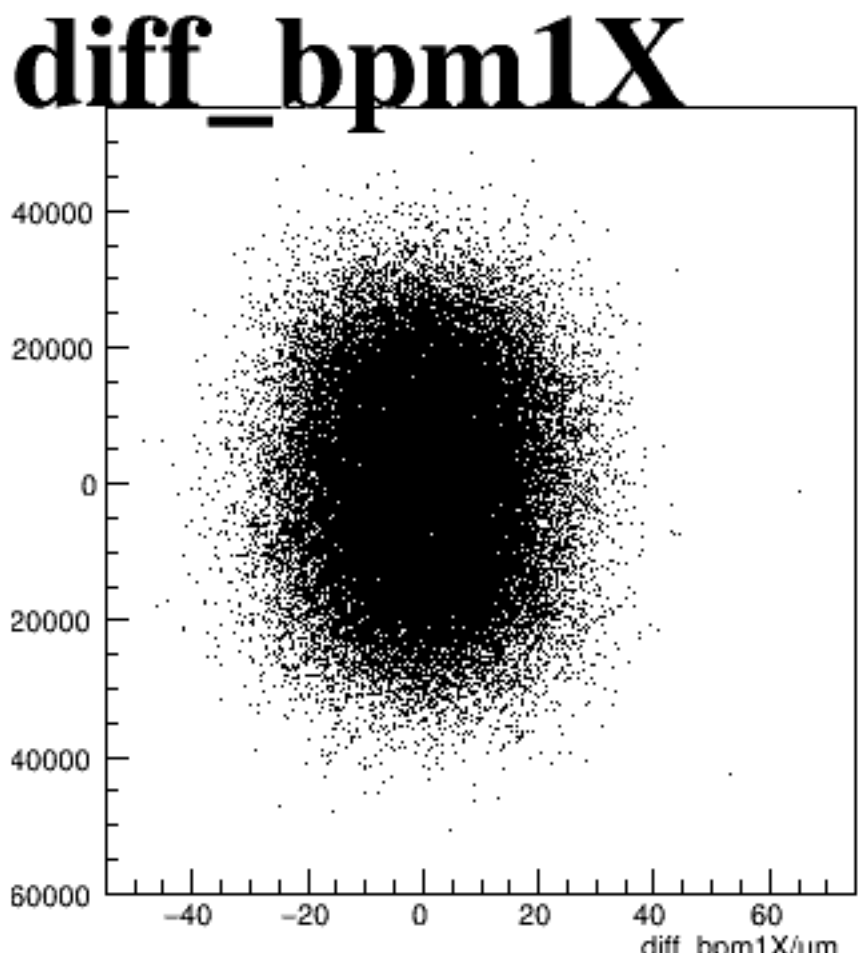

asym_atr2

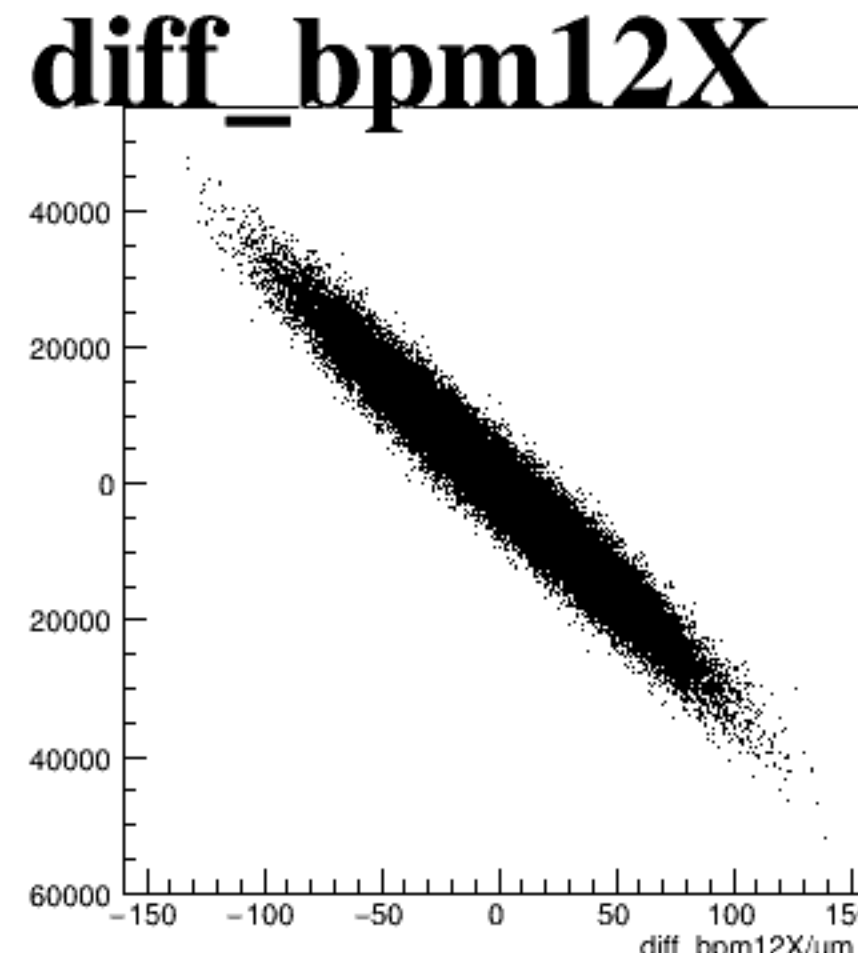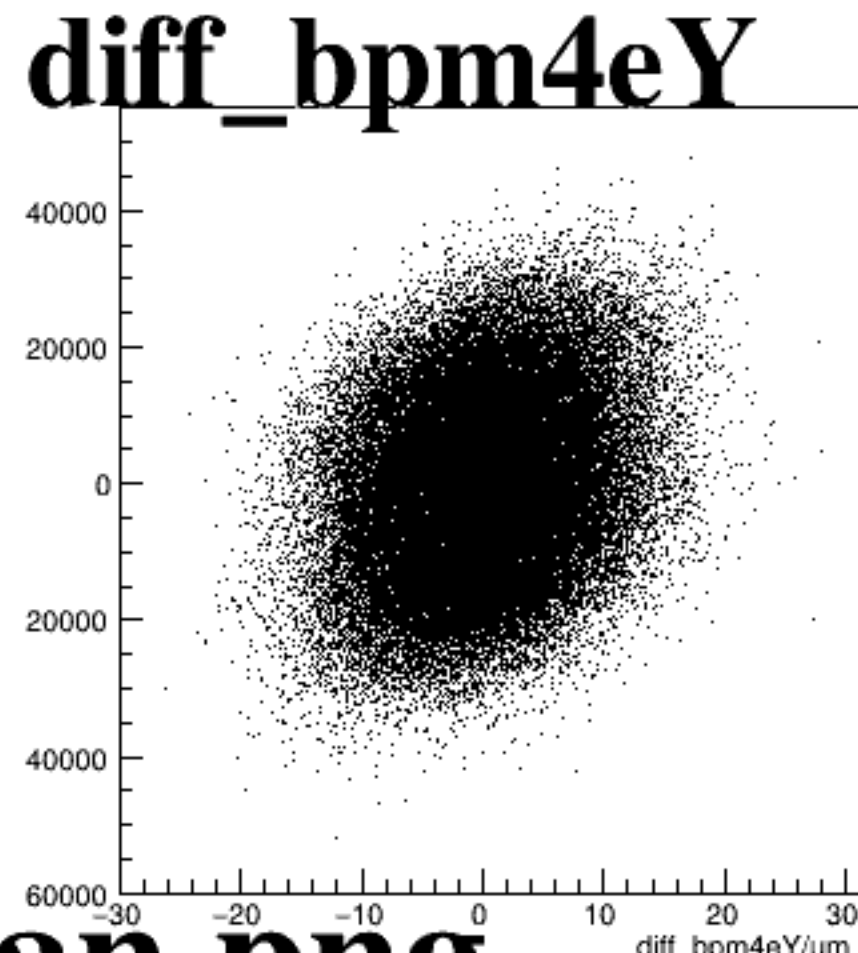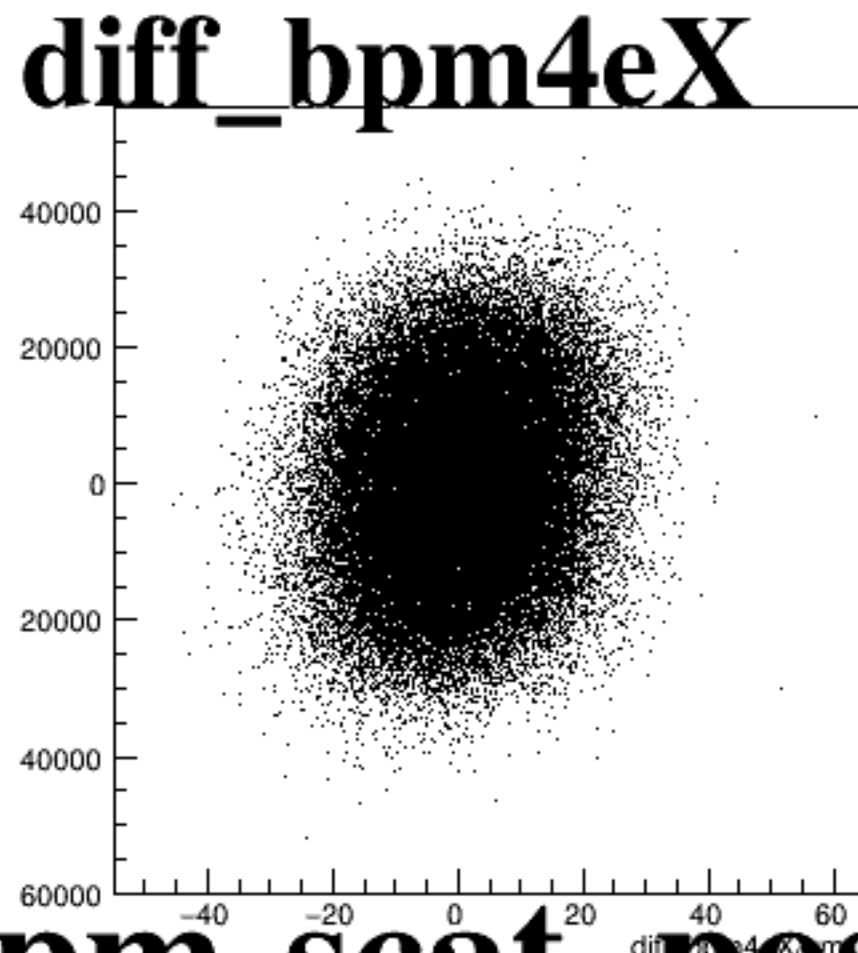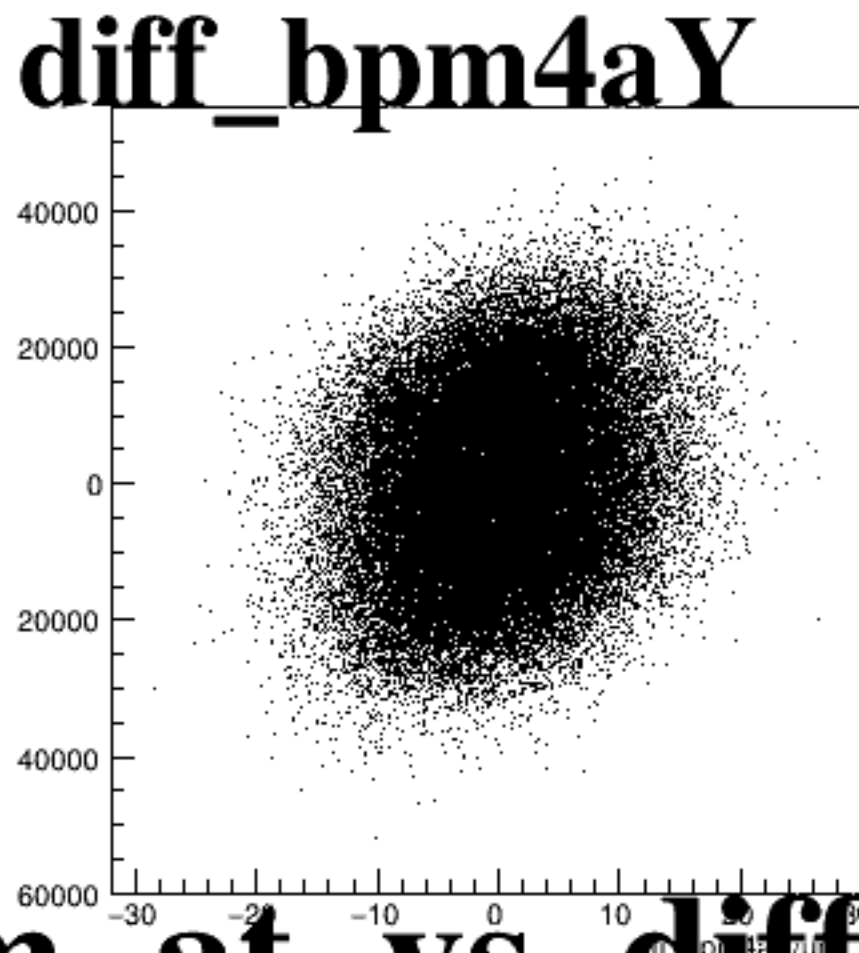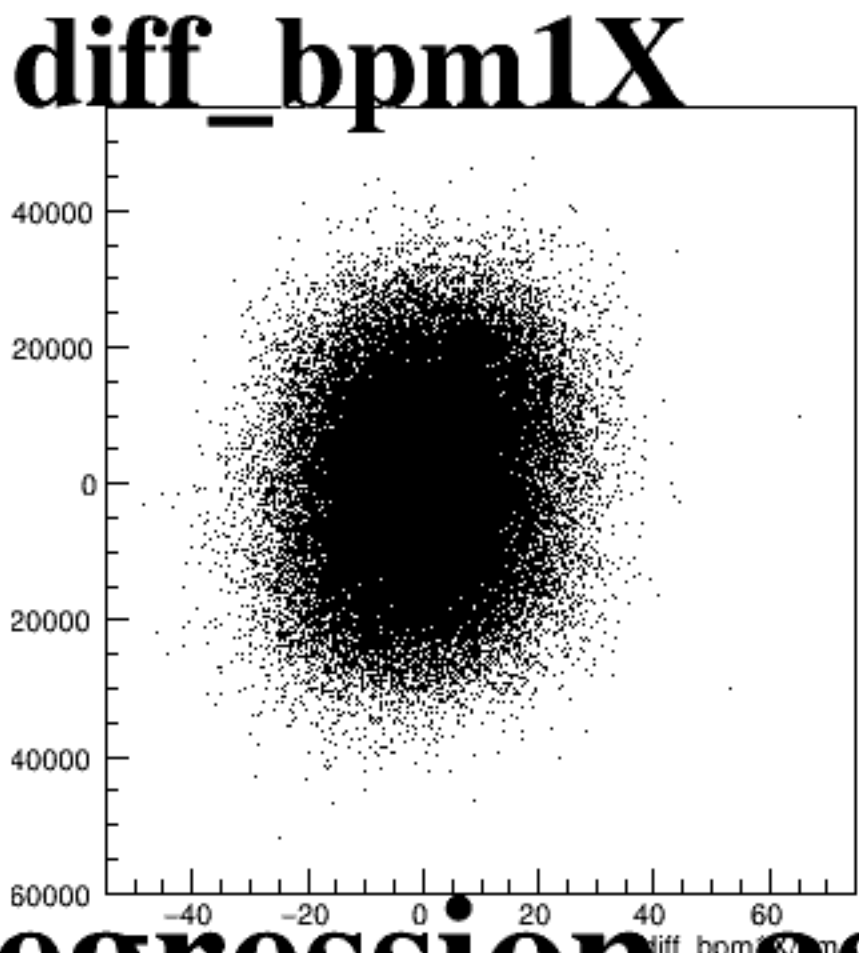

The figure consists of five scatter plots arranged horizontally, each showing the distribution of diffraction orders for a specific beam parameter. The y-axis for all plots is labeled 'diff_order' and ranges from -10000 to 10000. The x-axis for each plot is labeled with a specific beam parameter, and the distributions are roughly circular and centered at (0,0).

- diff_bpm1X**: The x-axis ranges from -40 to 60.
- diff_bpm4aY**: The x-axis ranges from -30 to 30.
- diff_bpm4eX**: The x-axis ranges from -40 to 60.
- diff_bpm4eY**: The x-axis ranges from -30 to 30.
- diff_bpm12X**: The x-axis ranges from -150 to 150.