




asym_usl

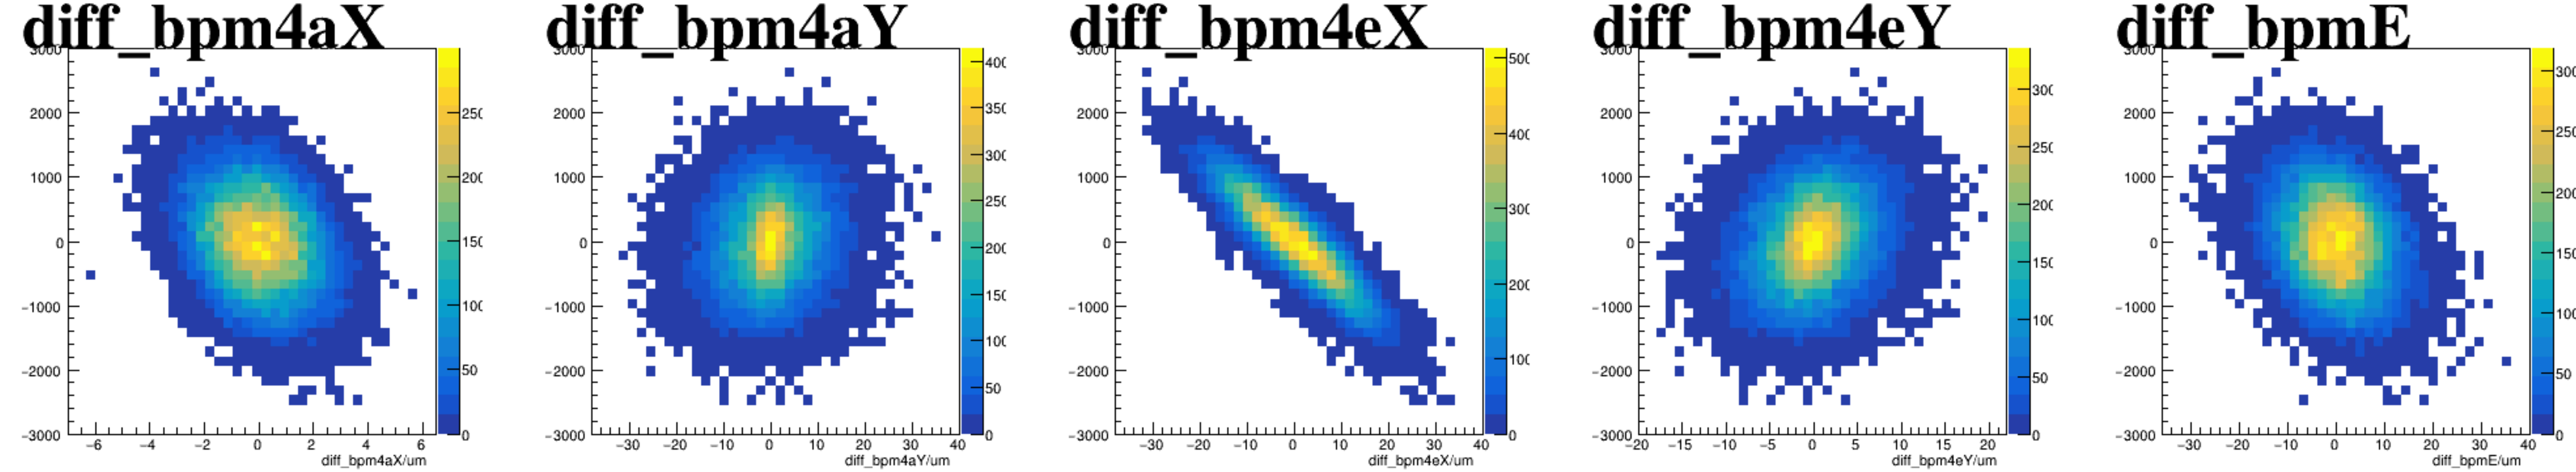


asym_dsl

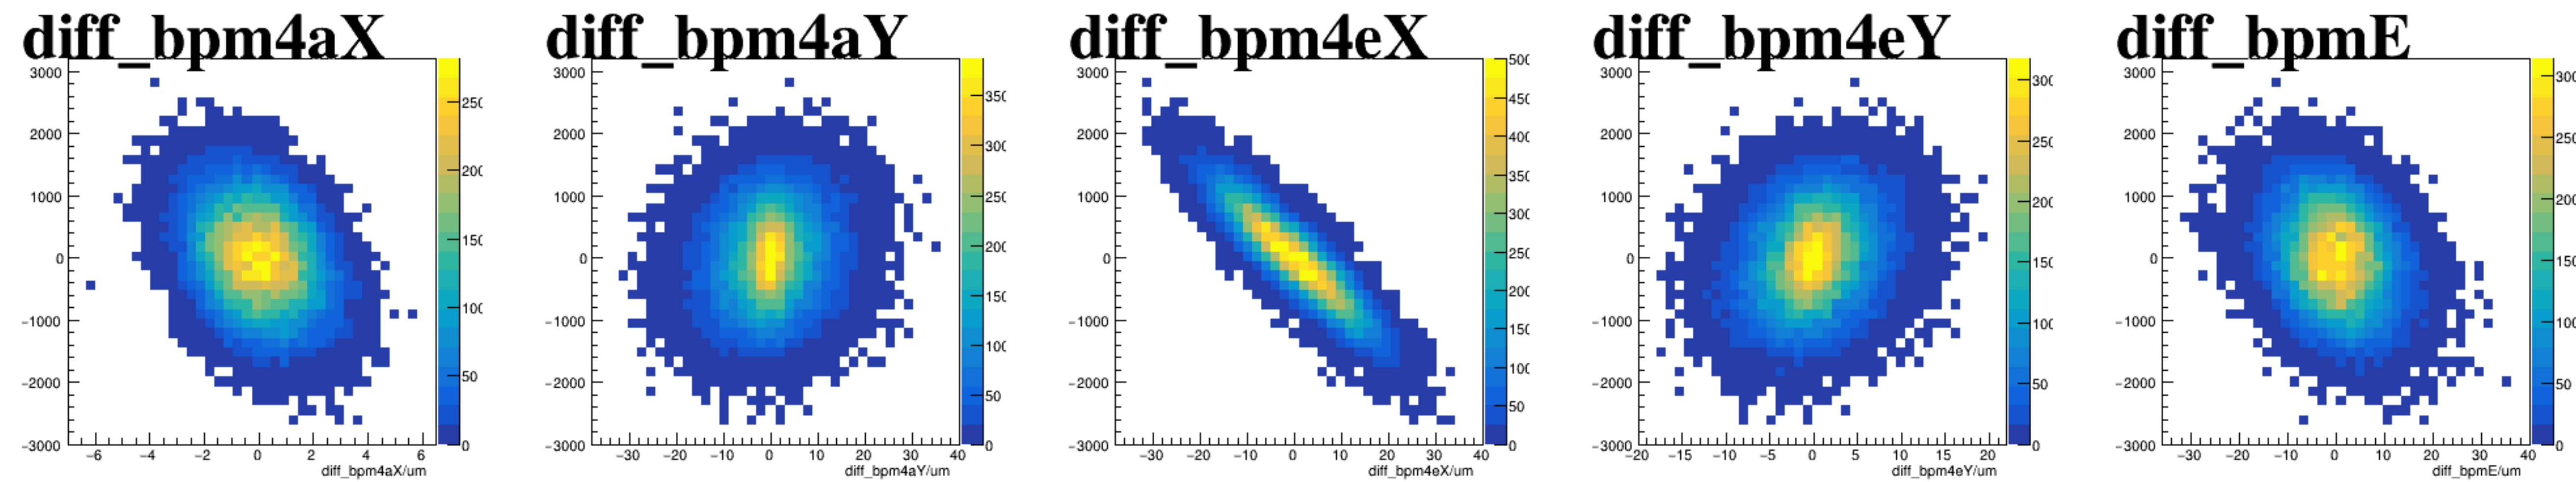


asym_usr

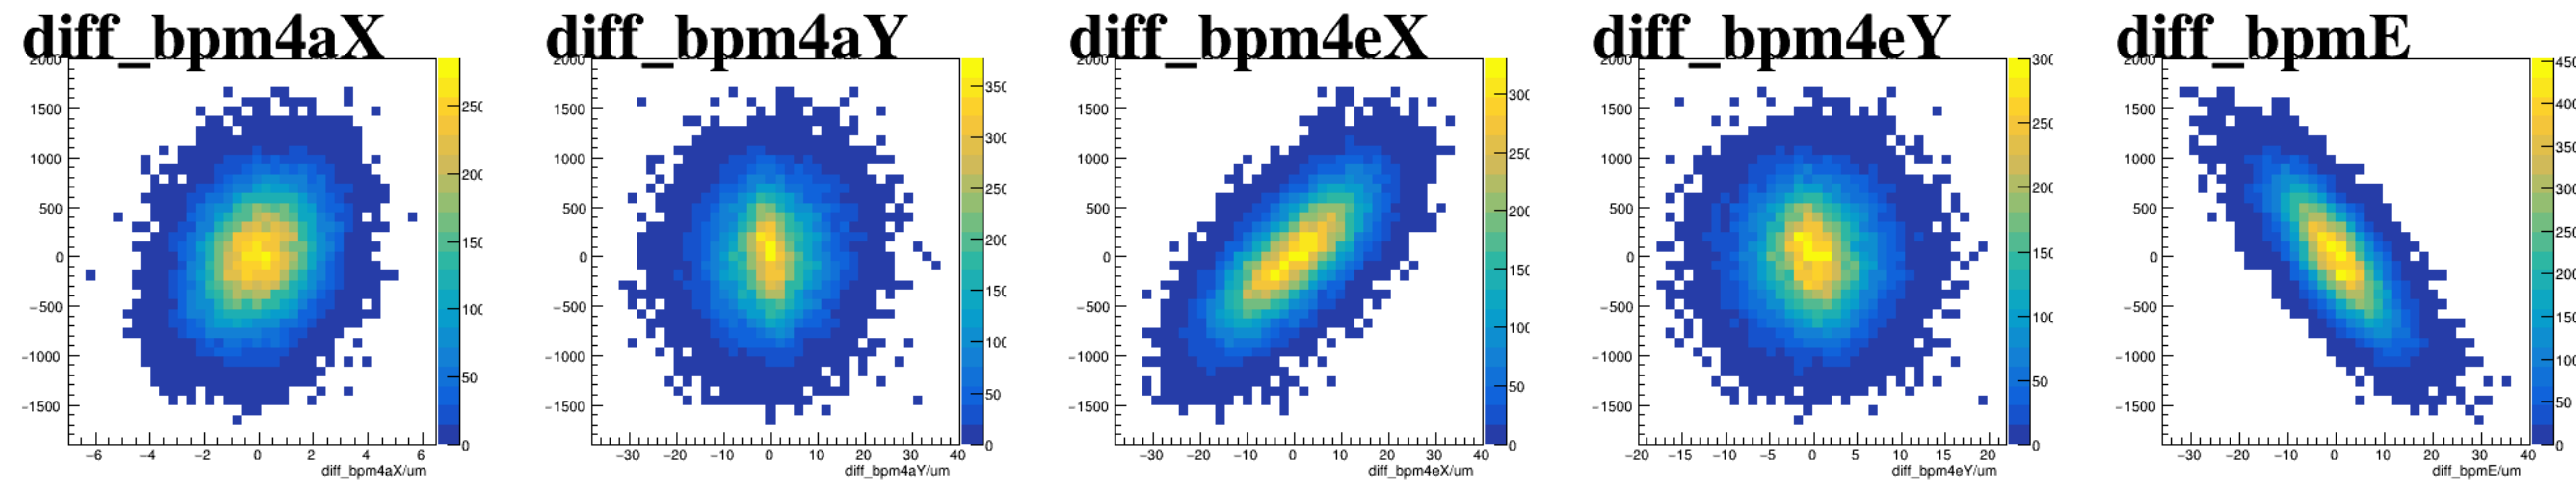


asym_dsr

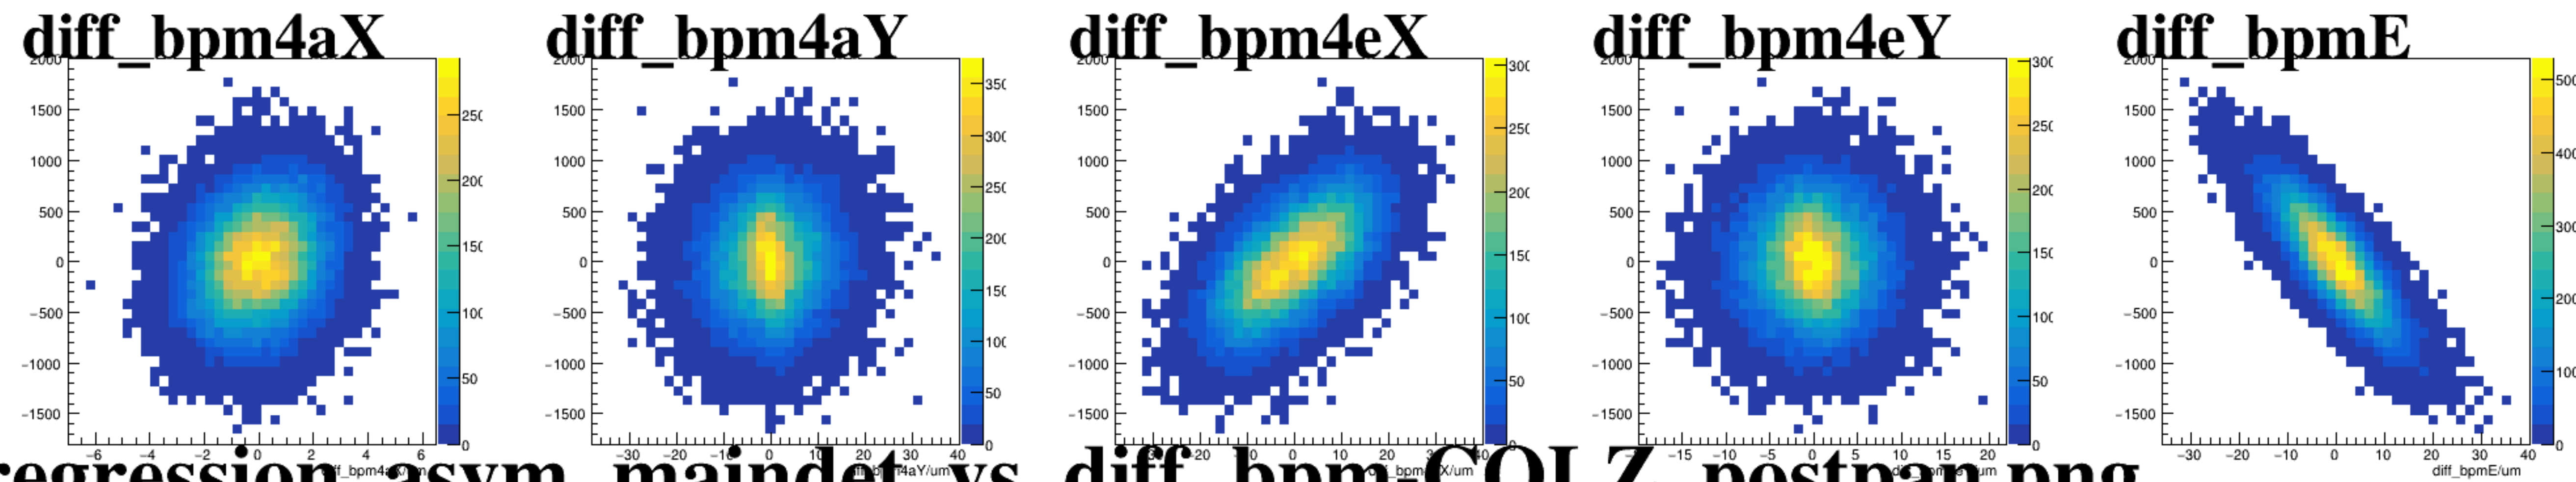


reg_asym_usl

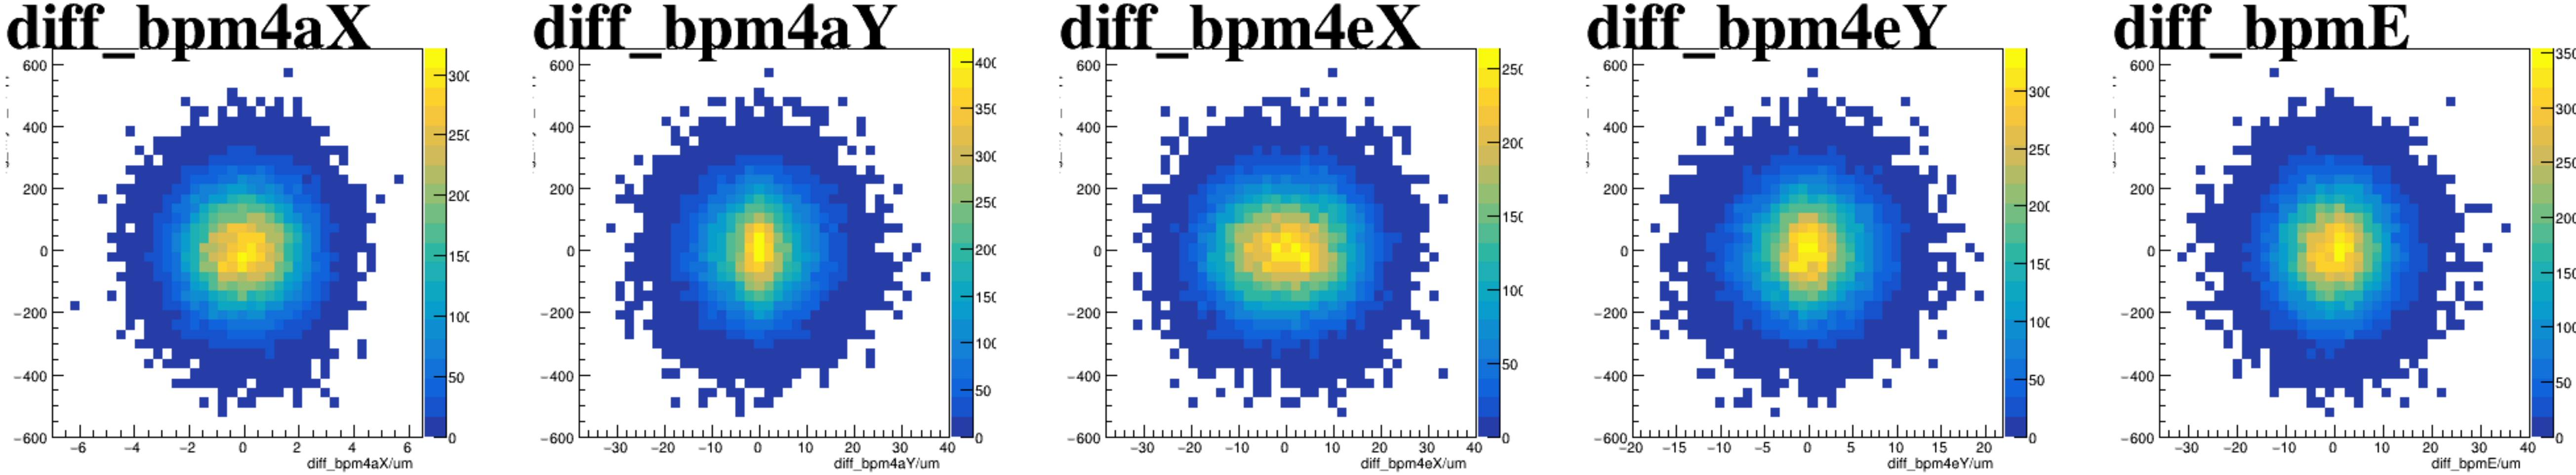


reg_asym_dsl

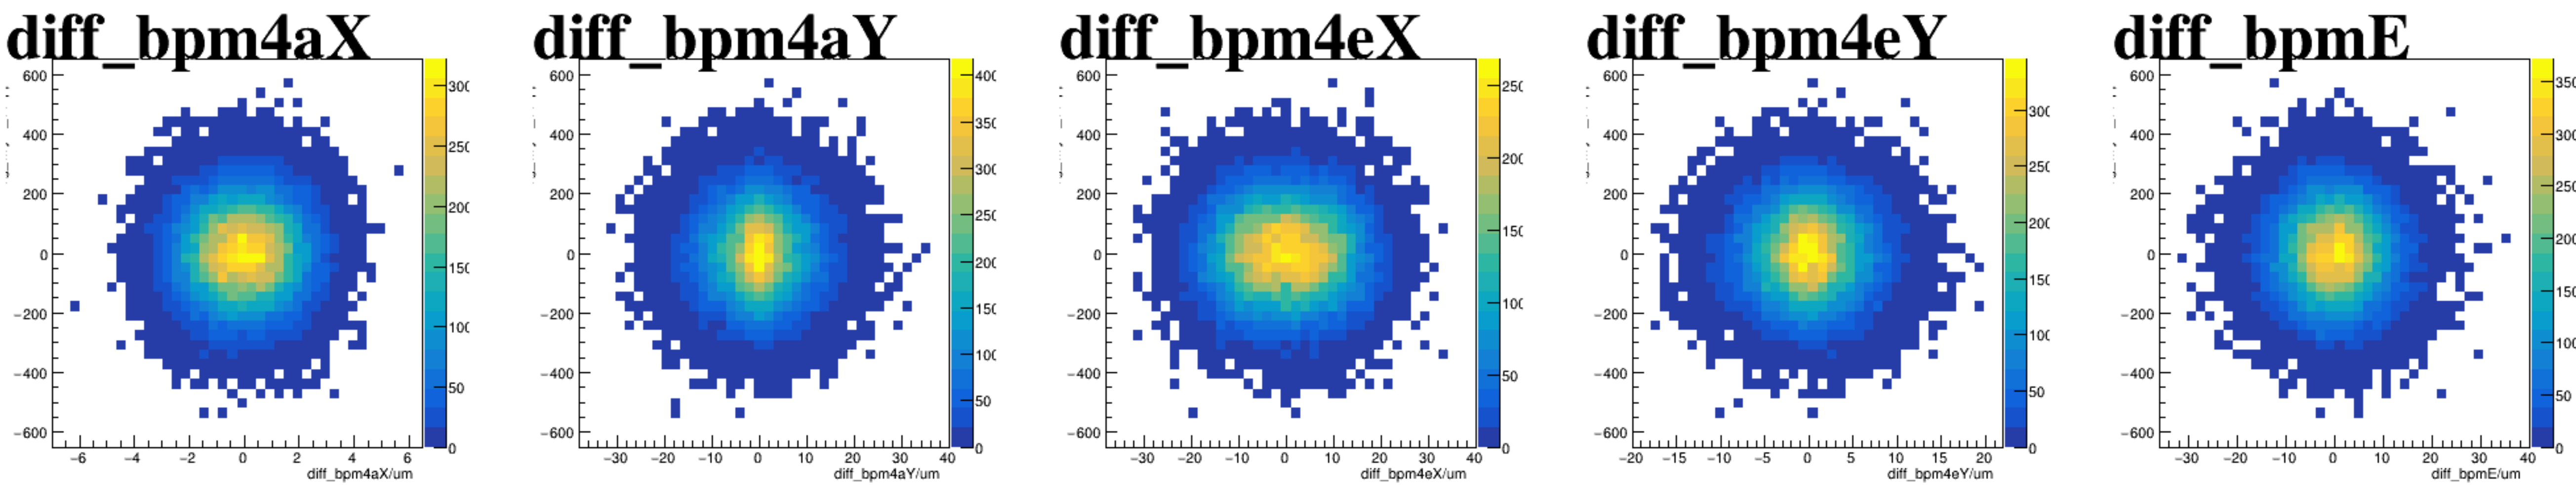






reg_asym_usr

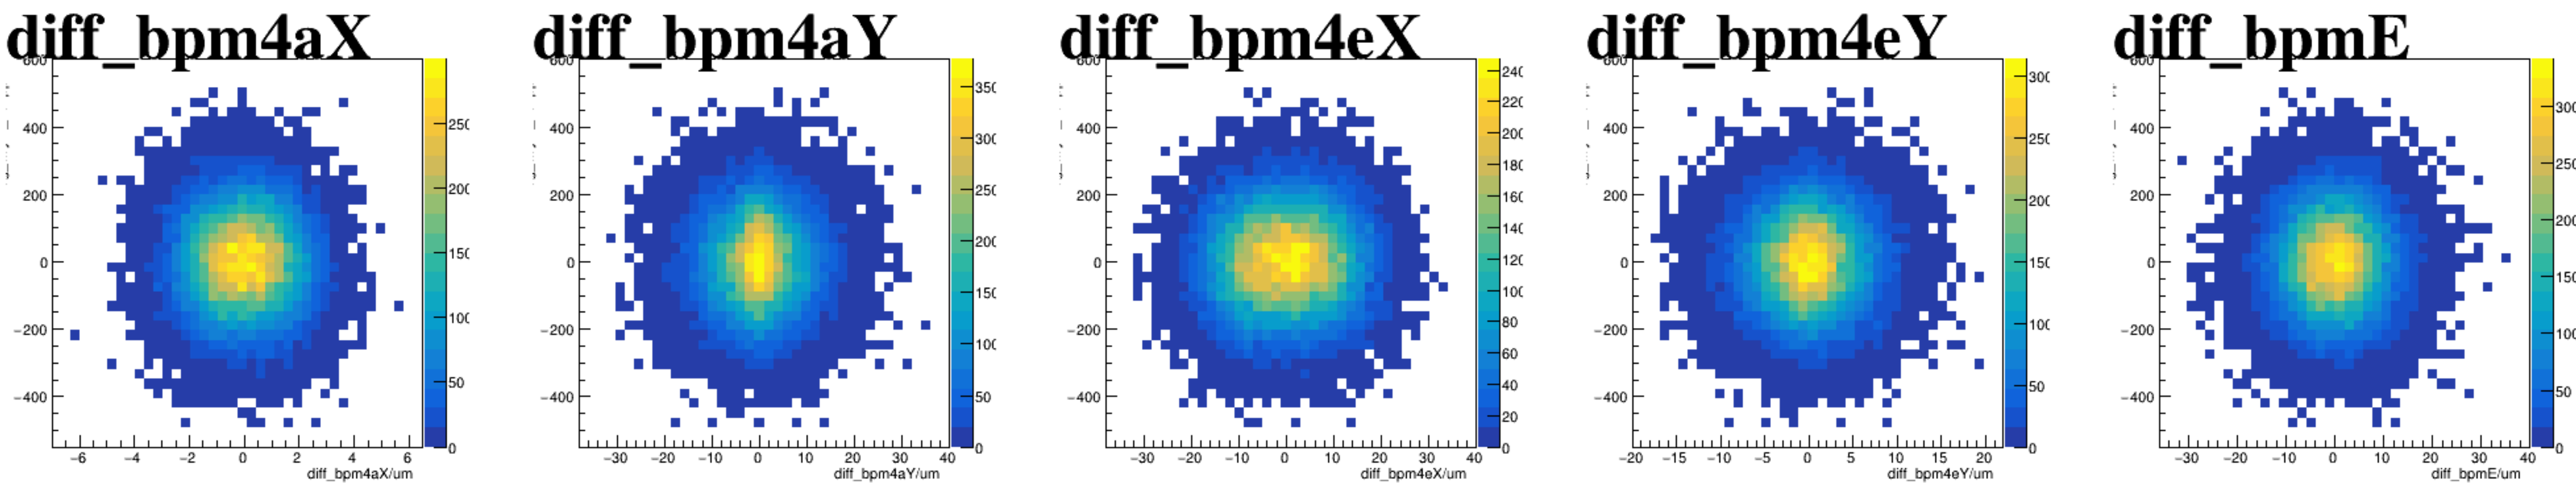






reg_asym_dsr

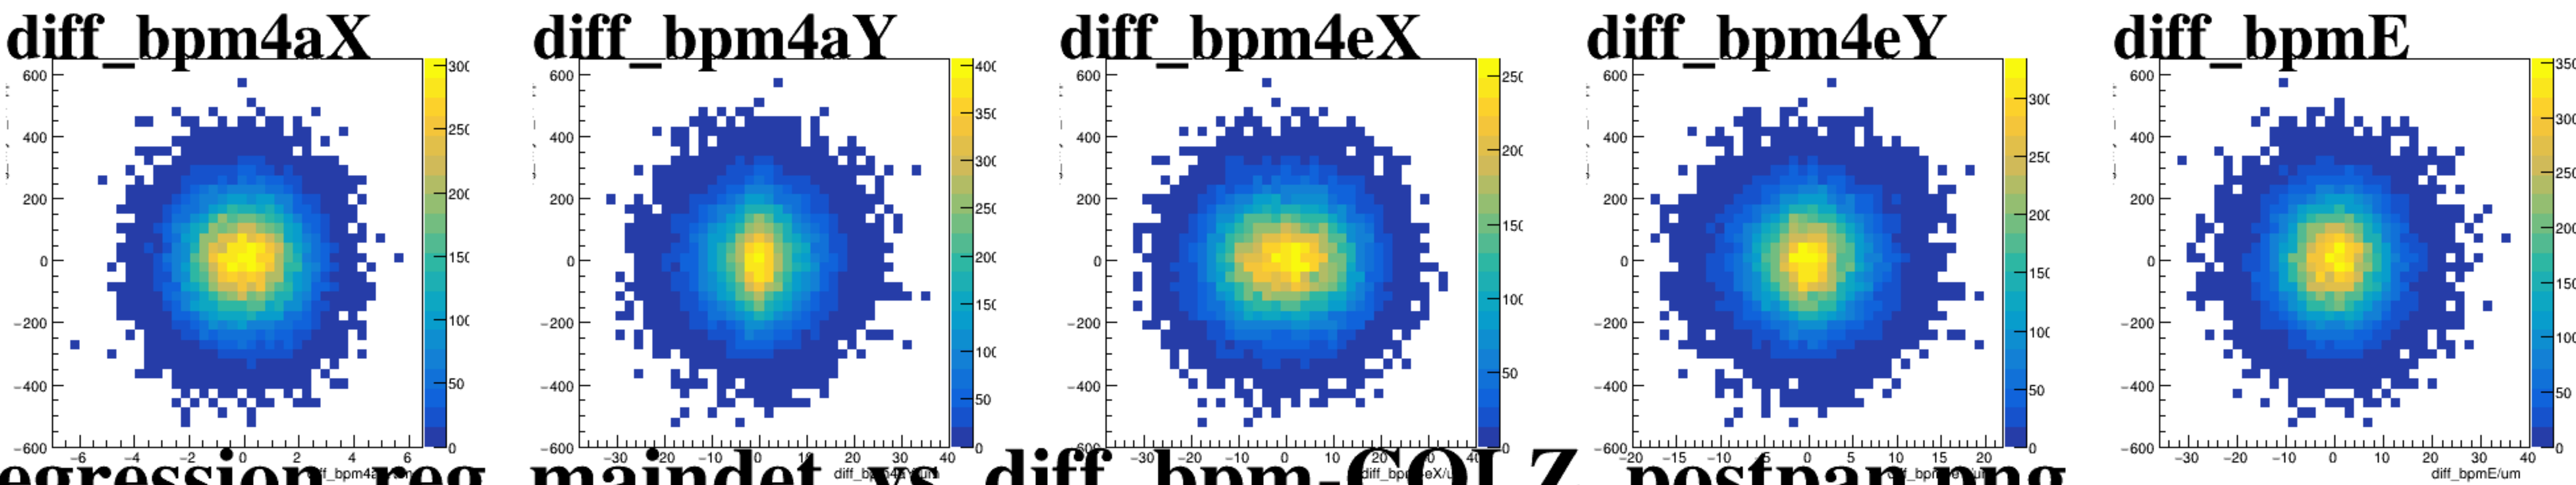






asym_usl

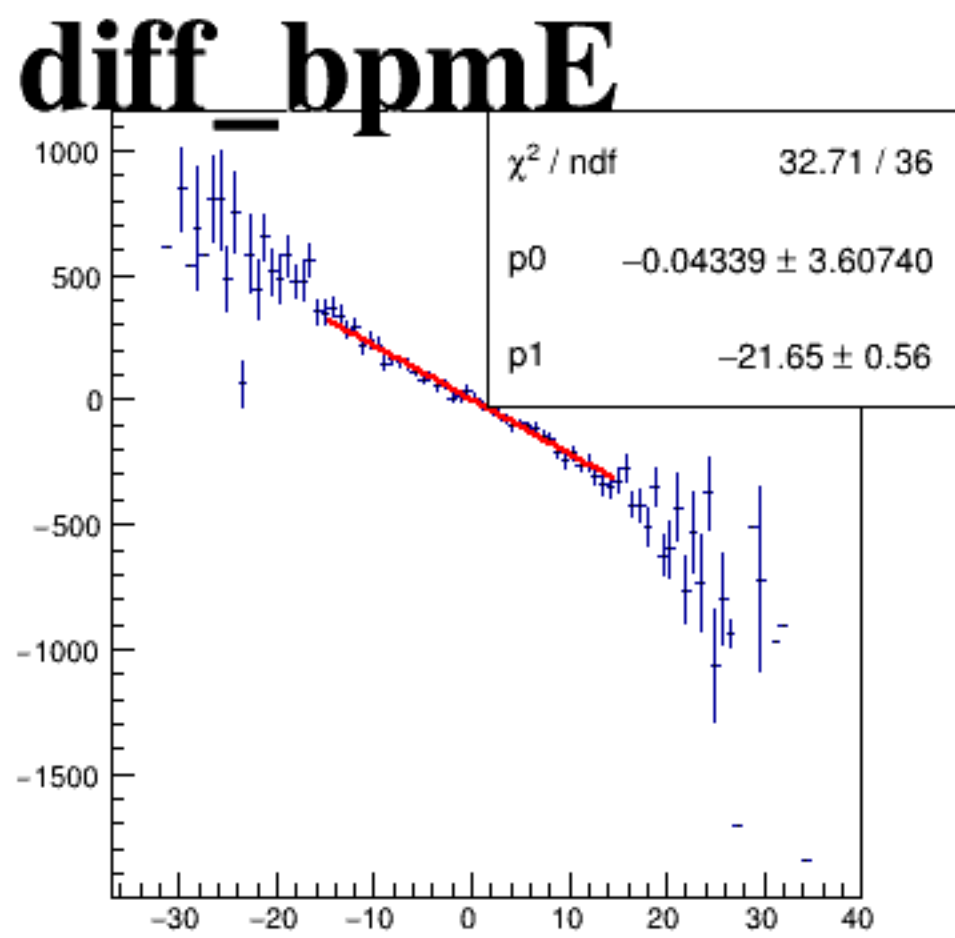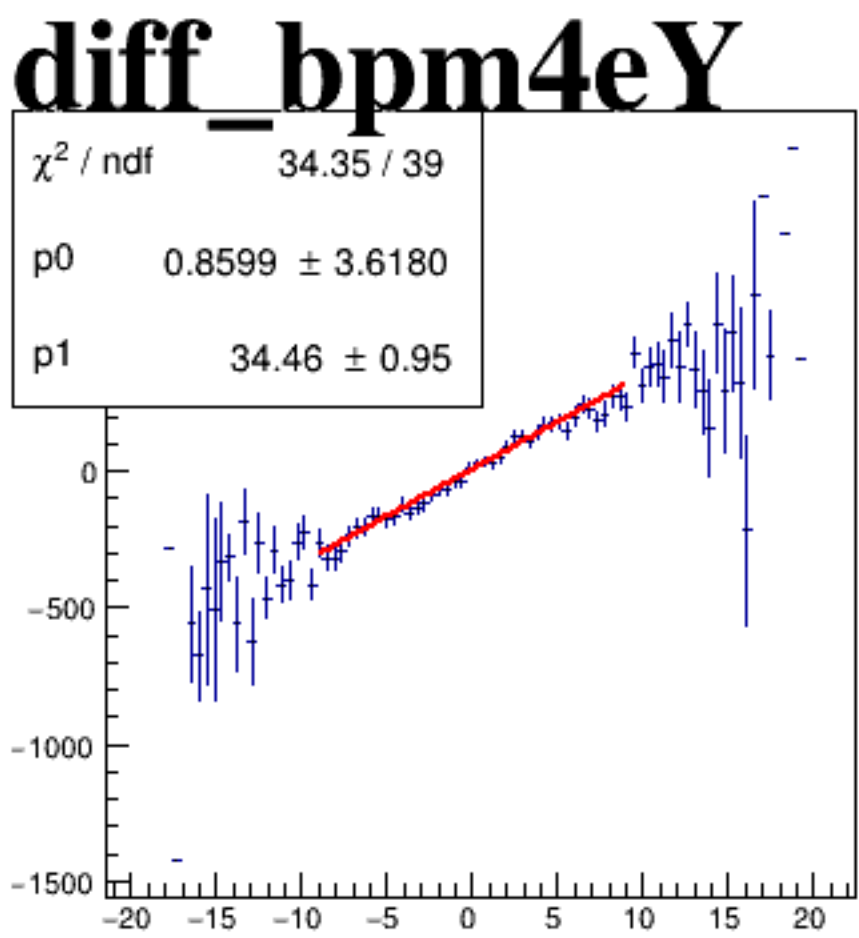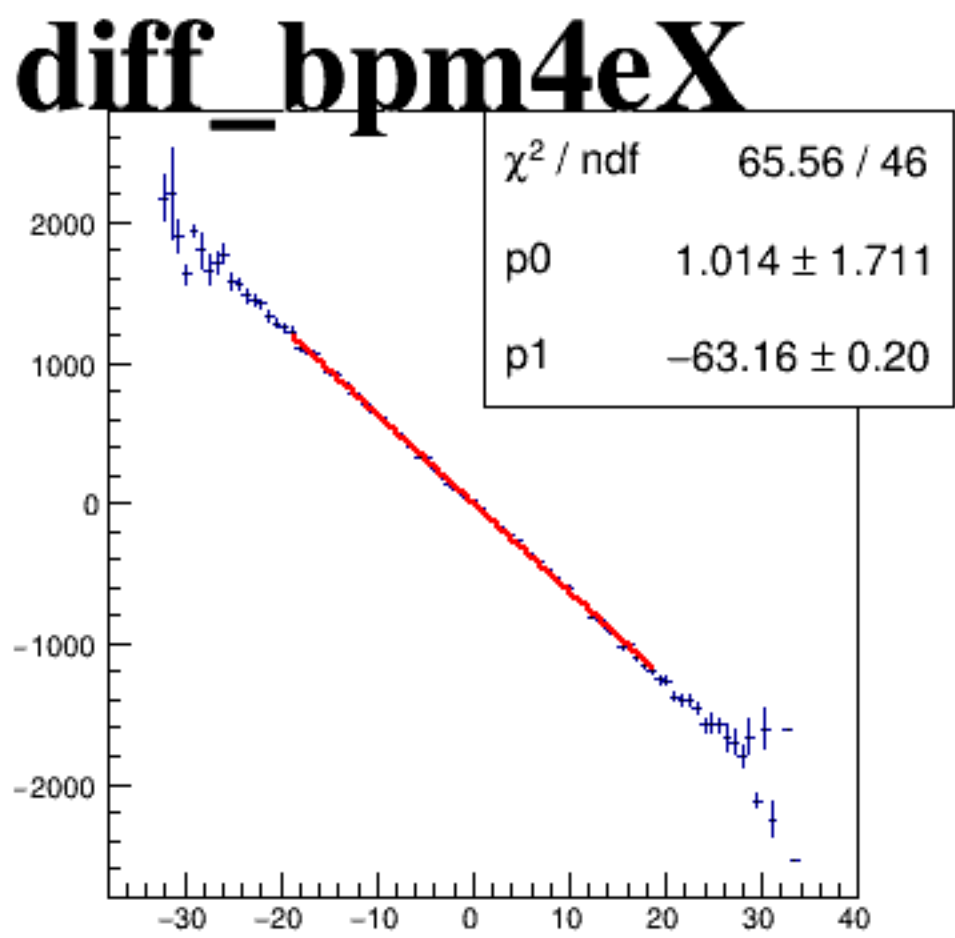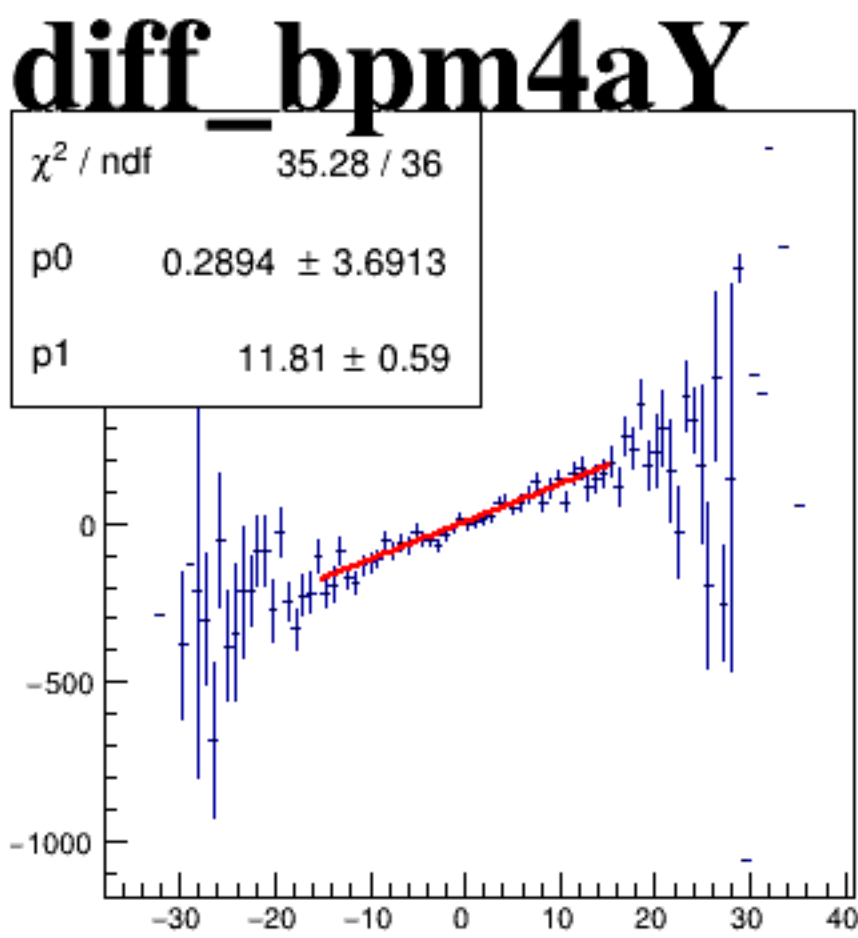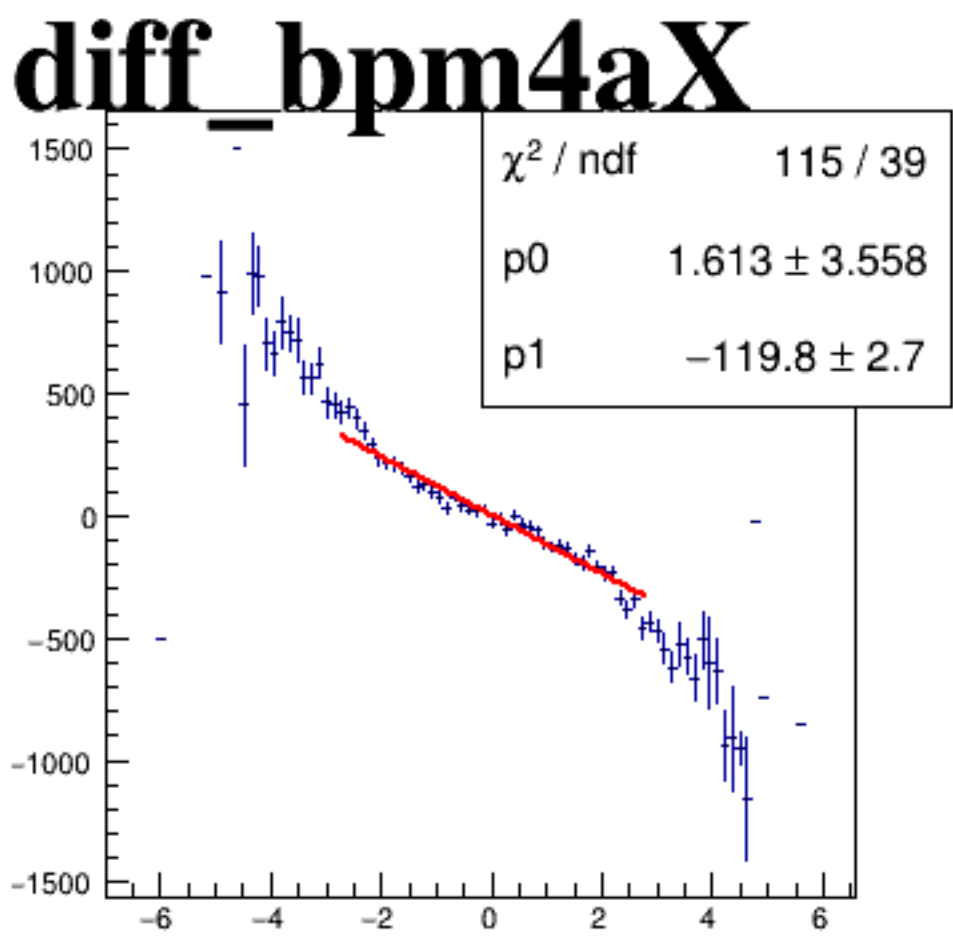






asym_dsl

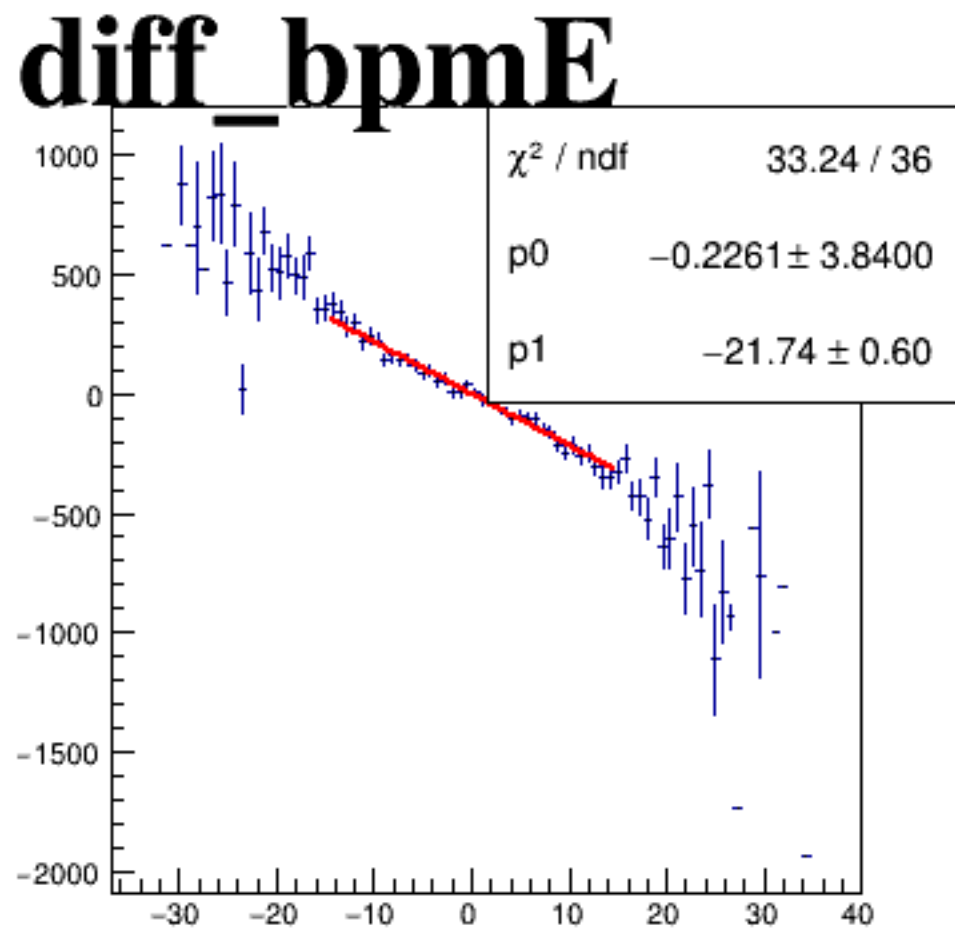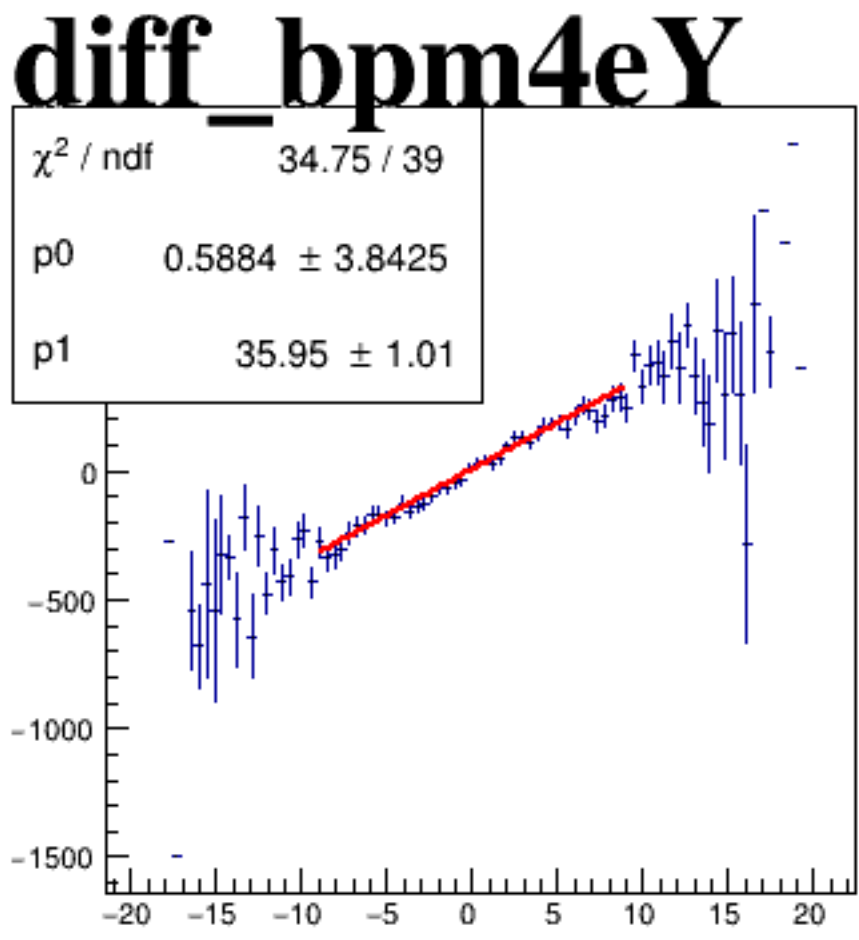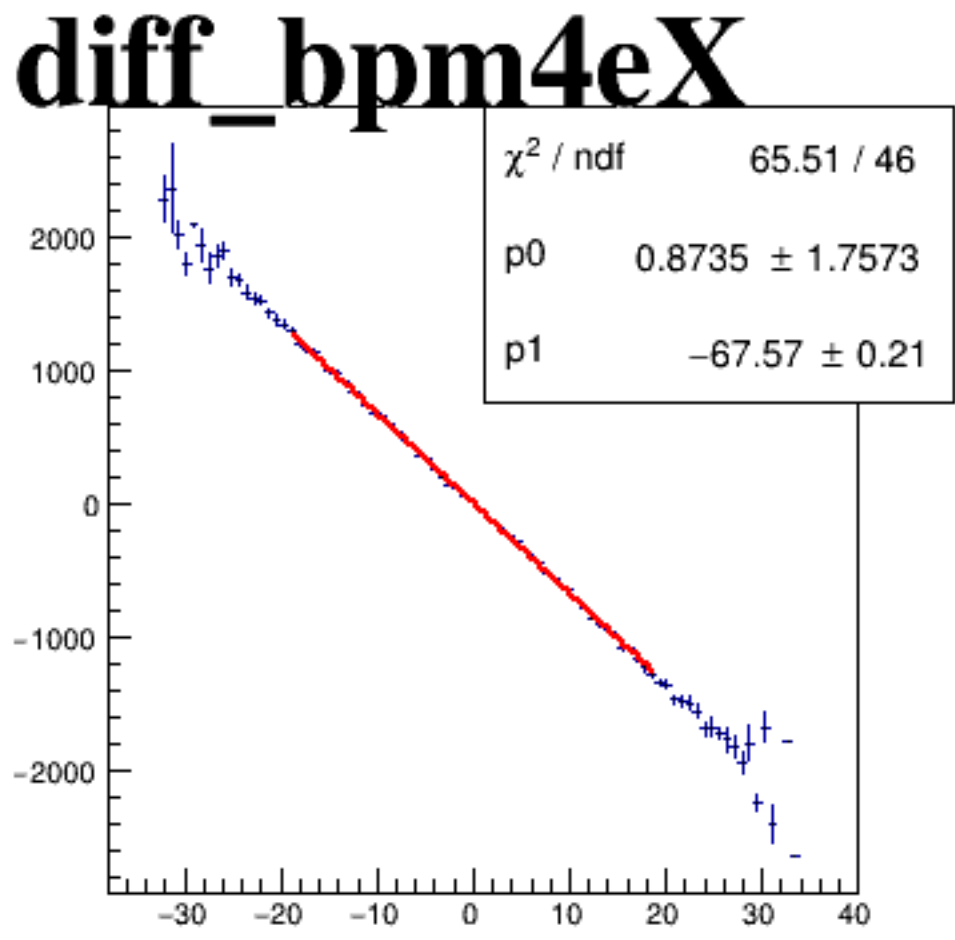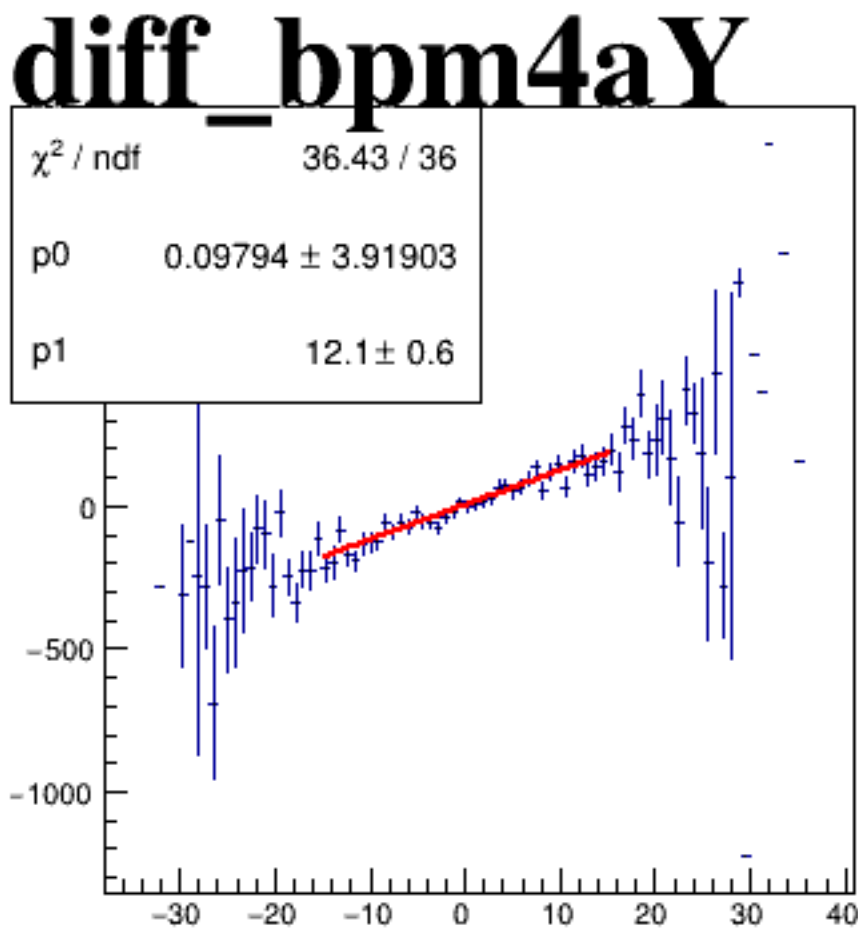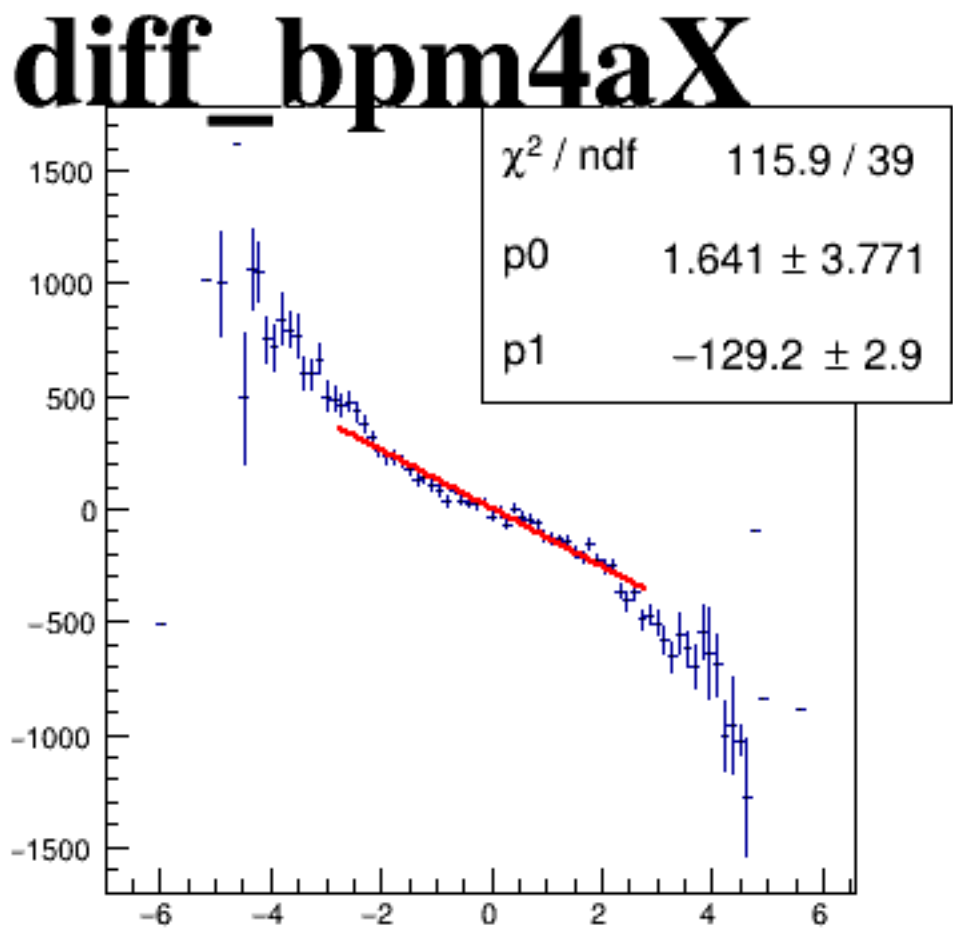






asym_usr

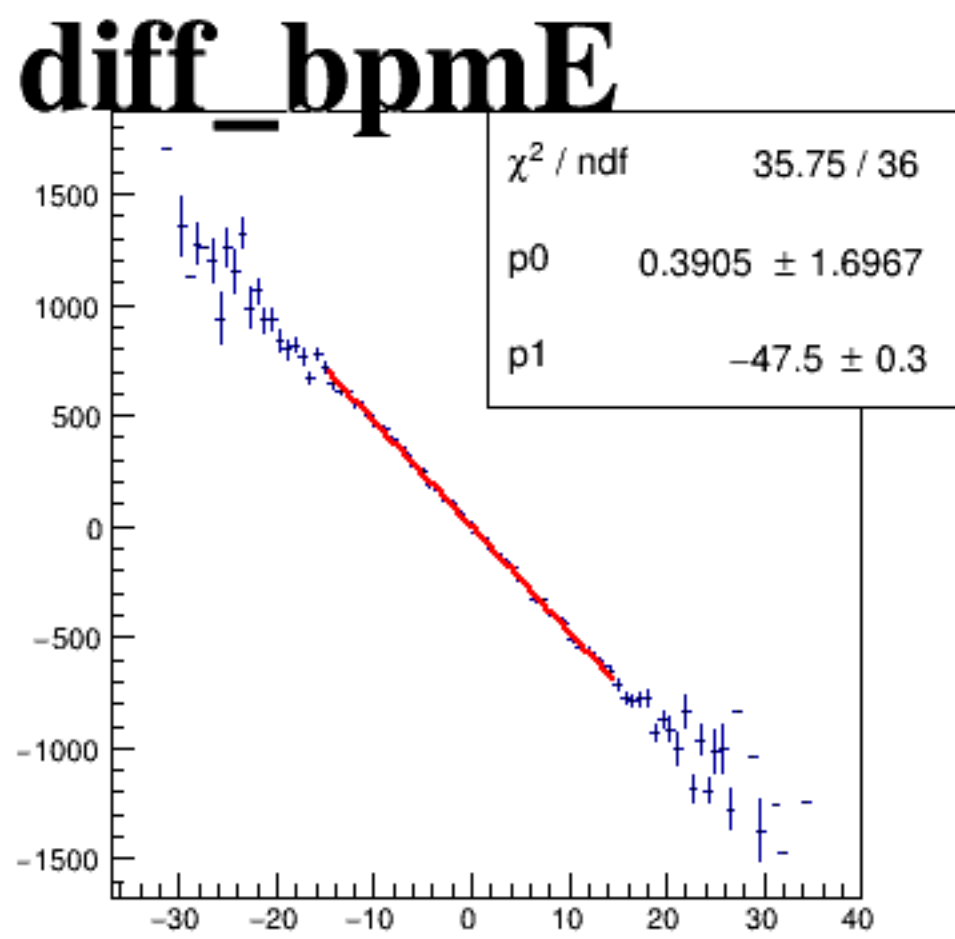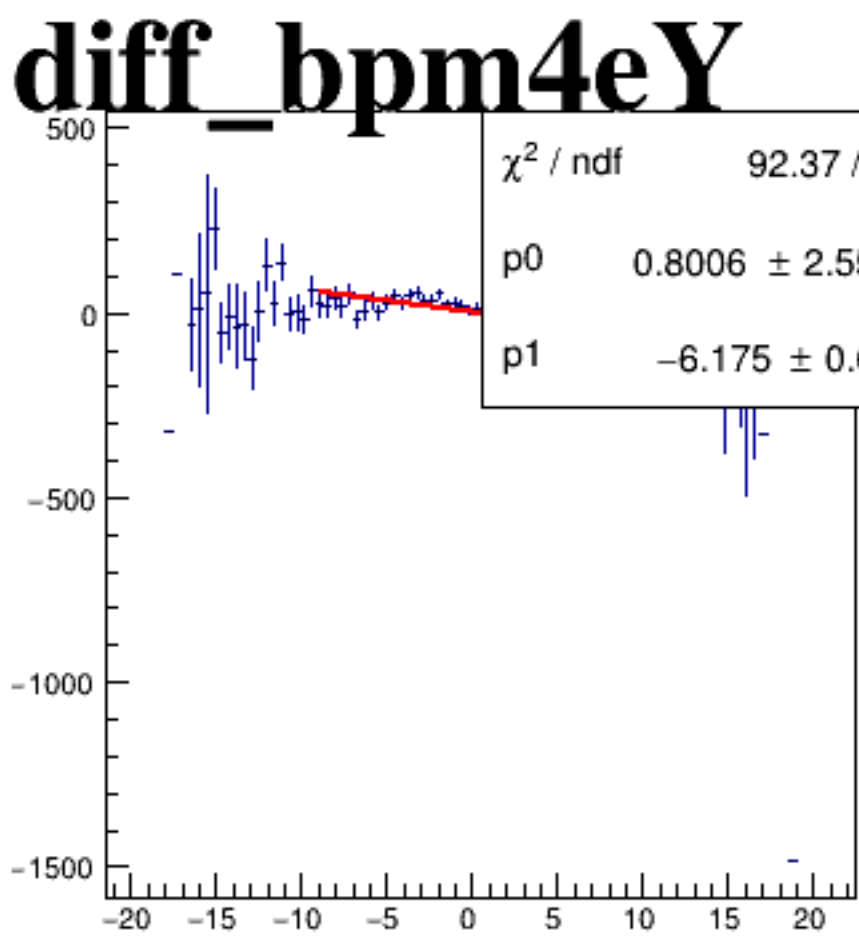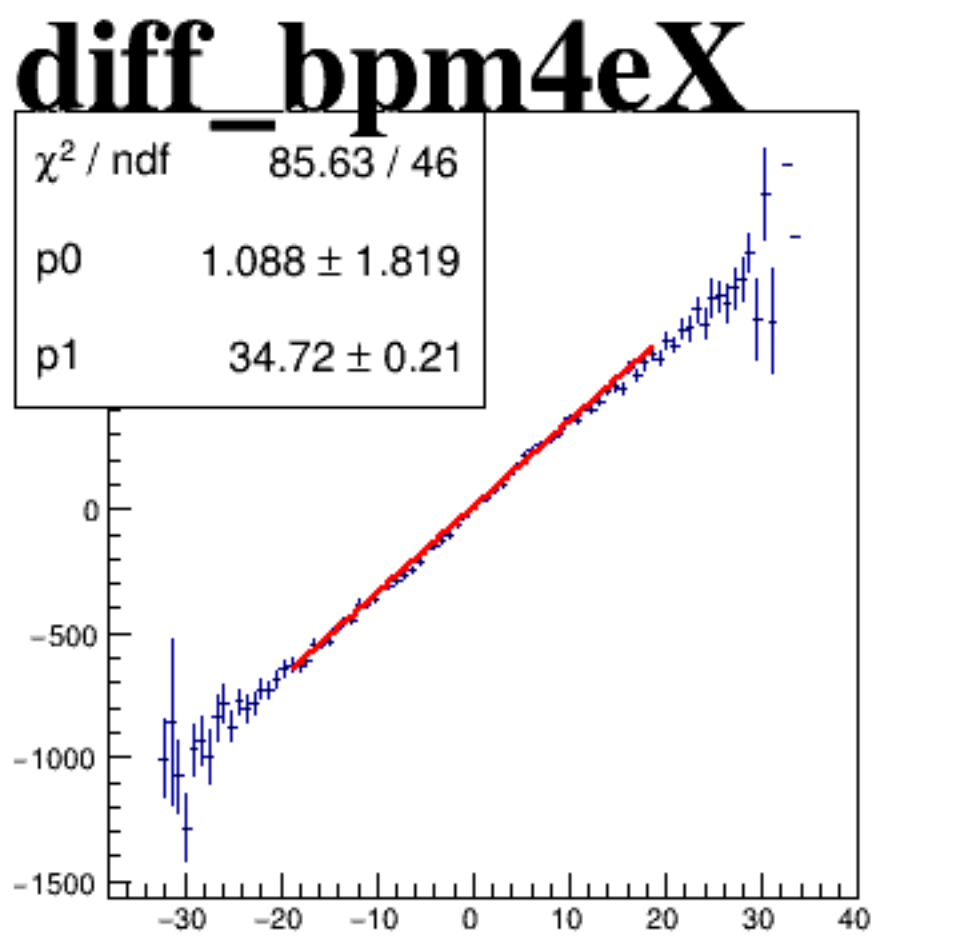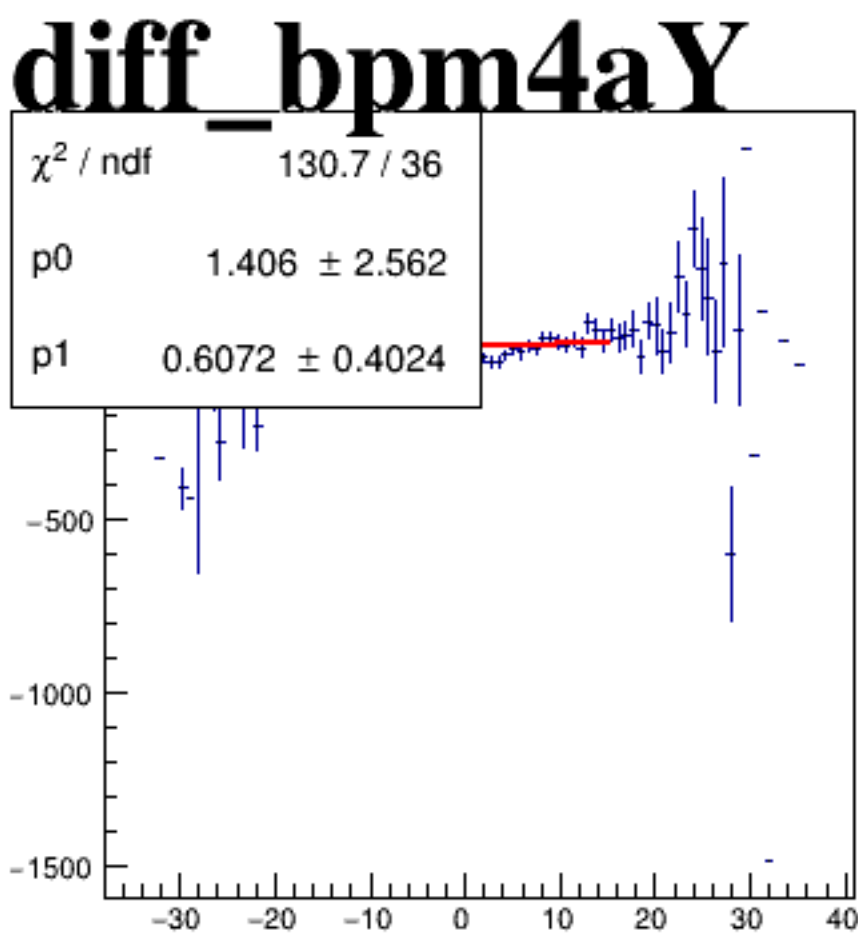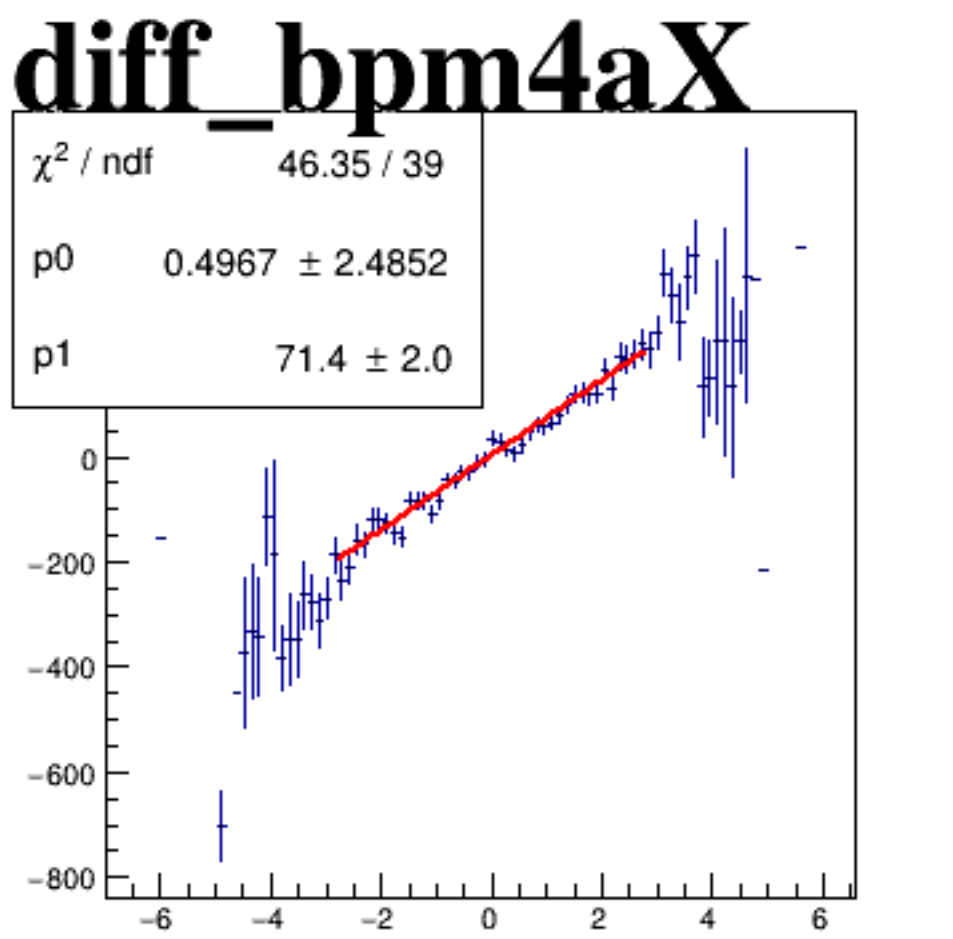






asym_dsr

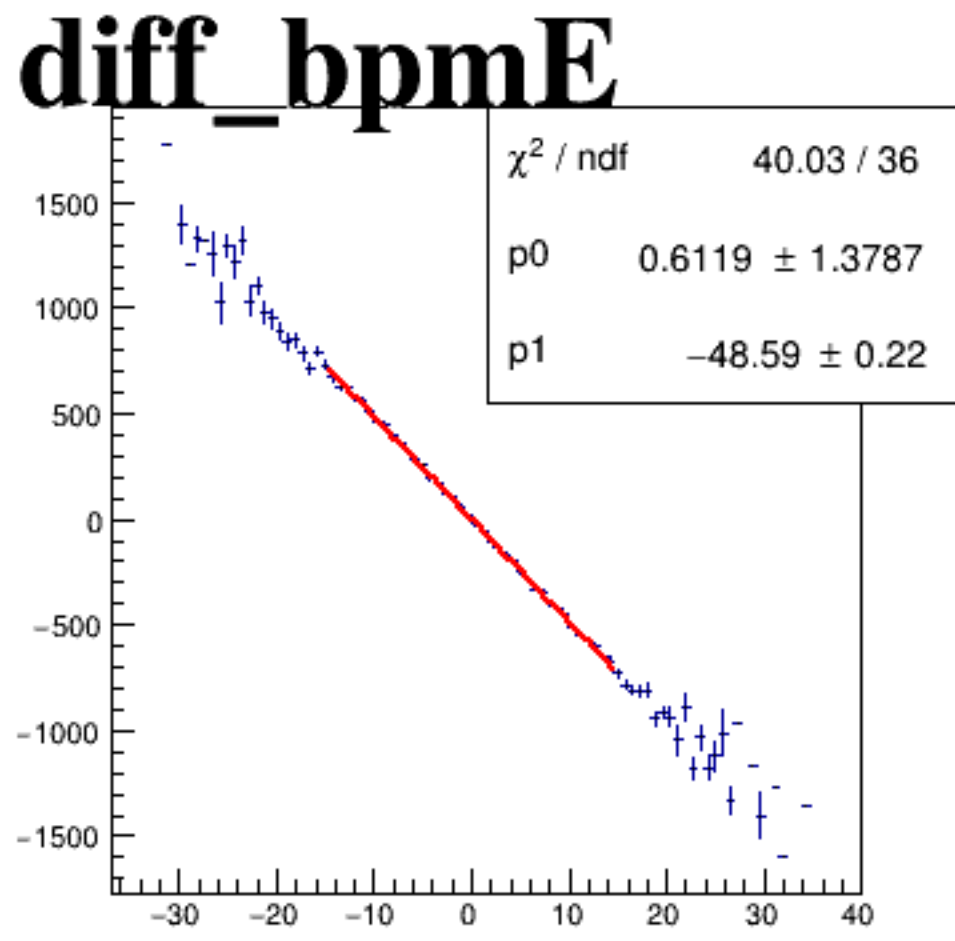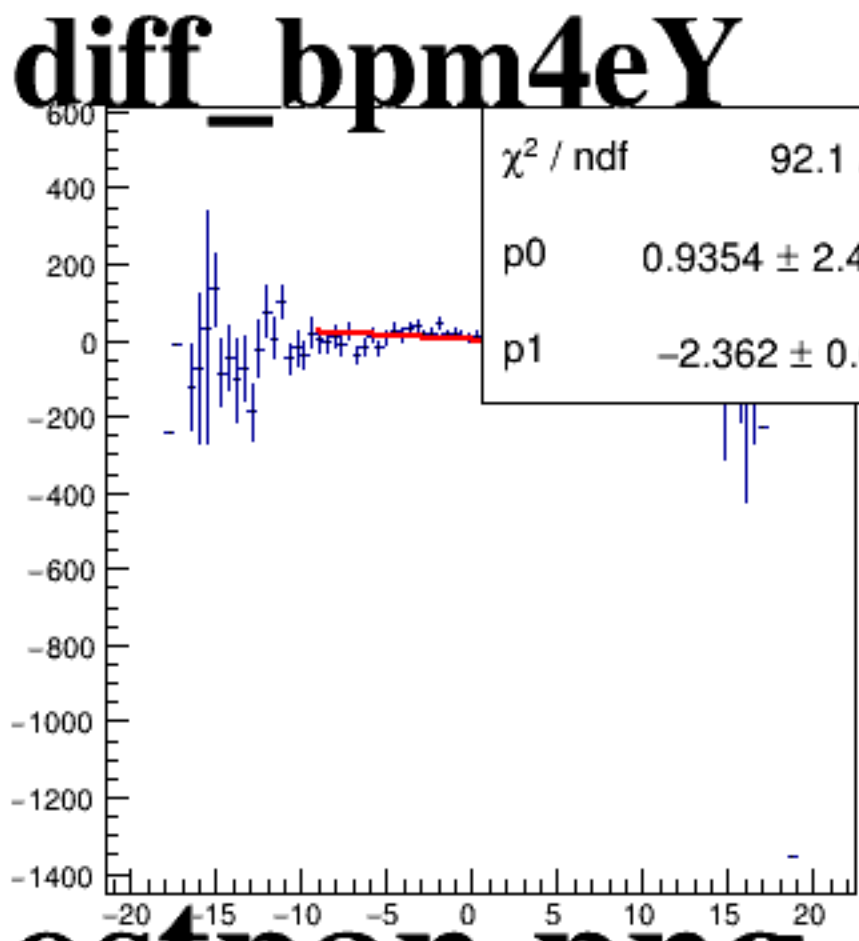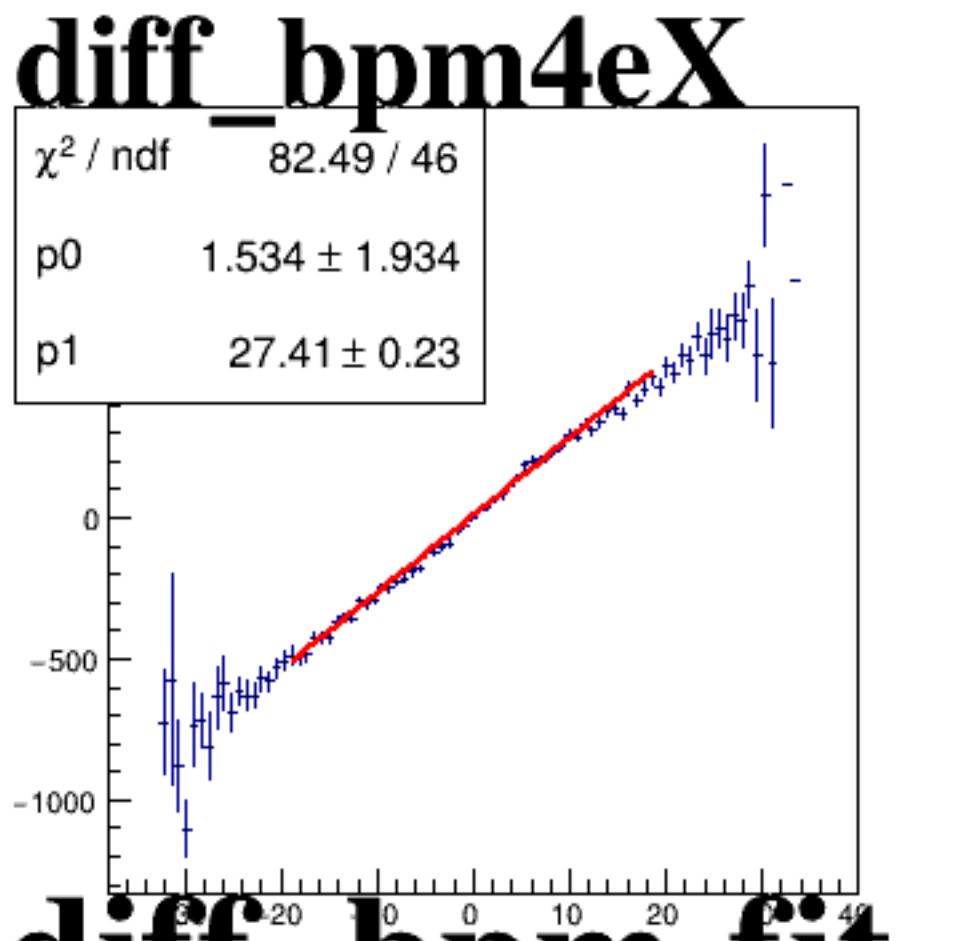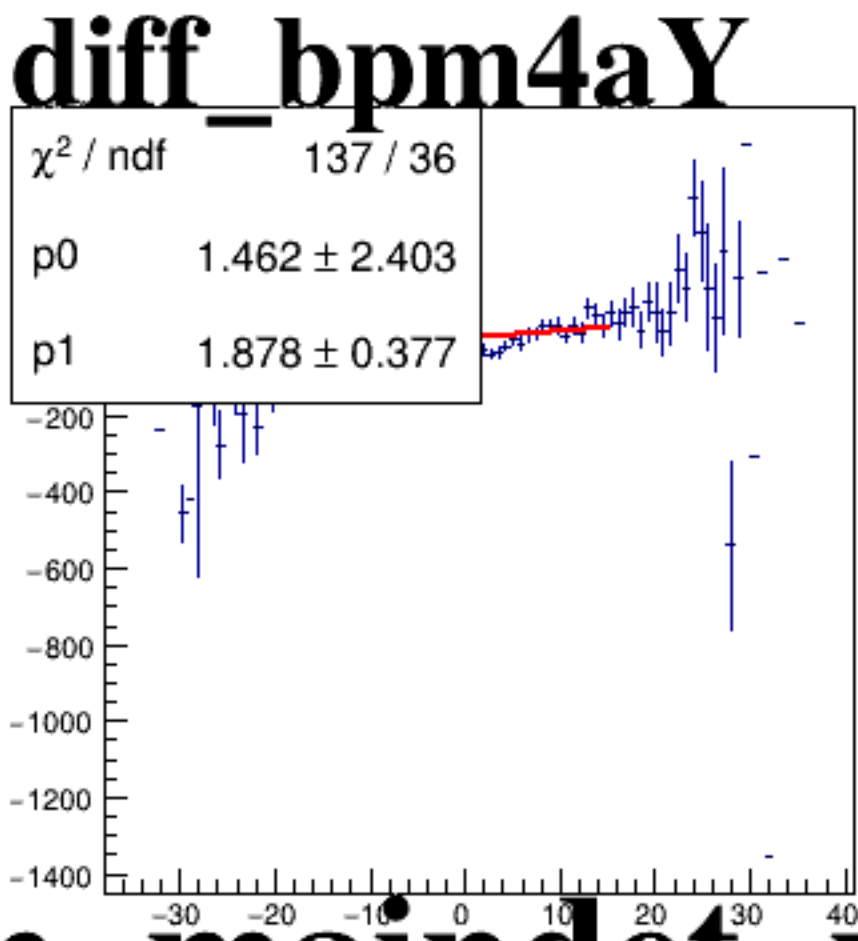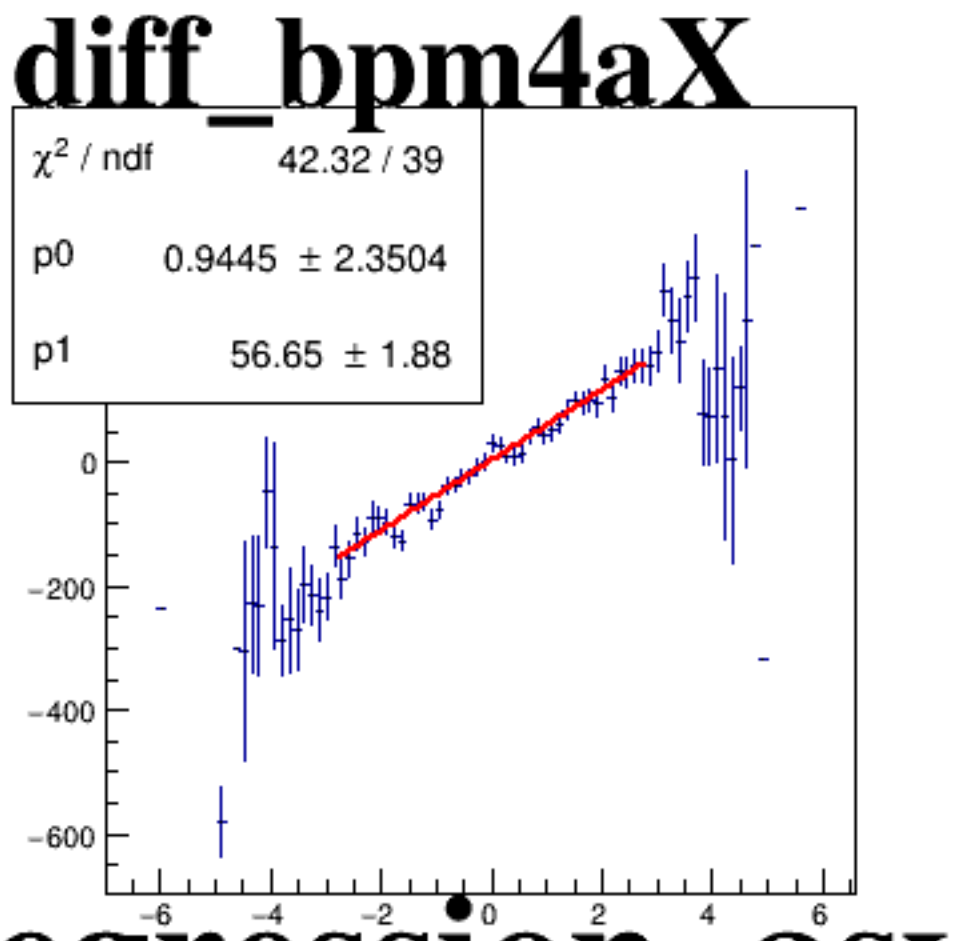






reg_asym_usl

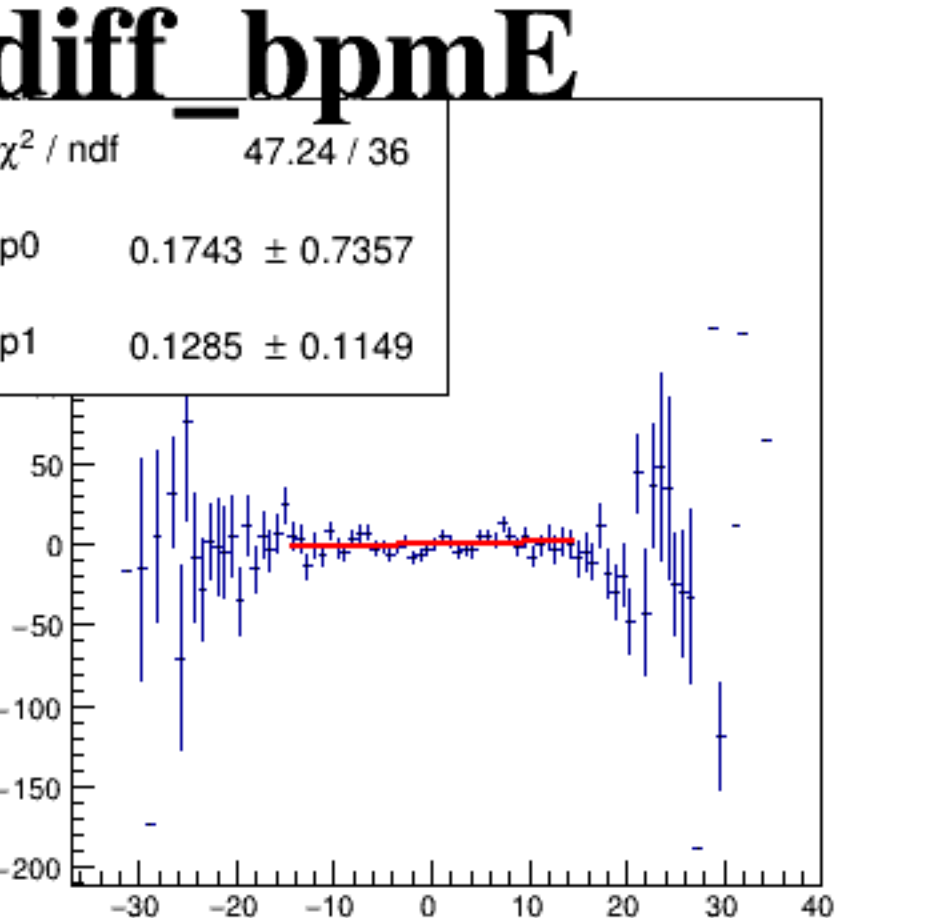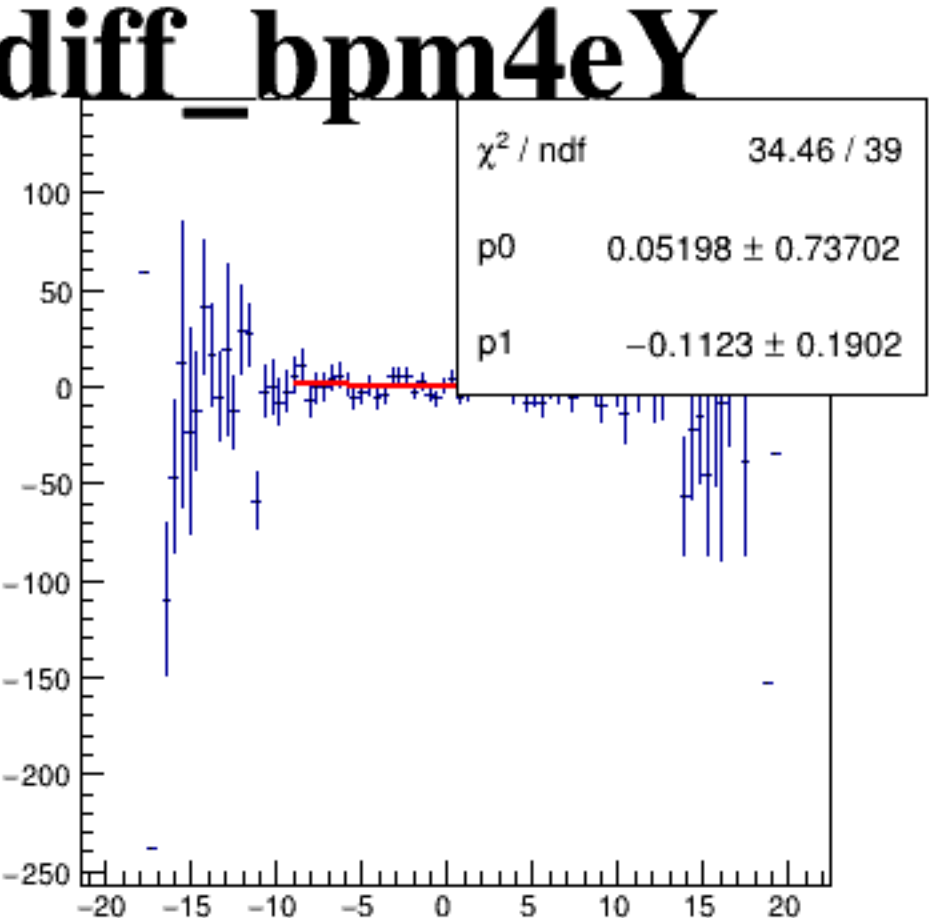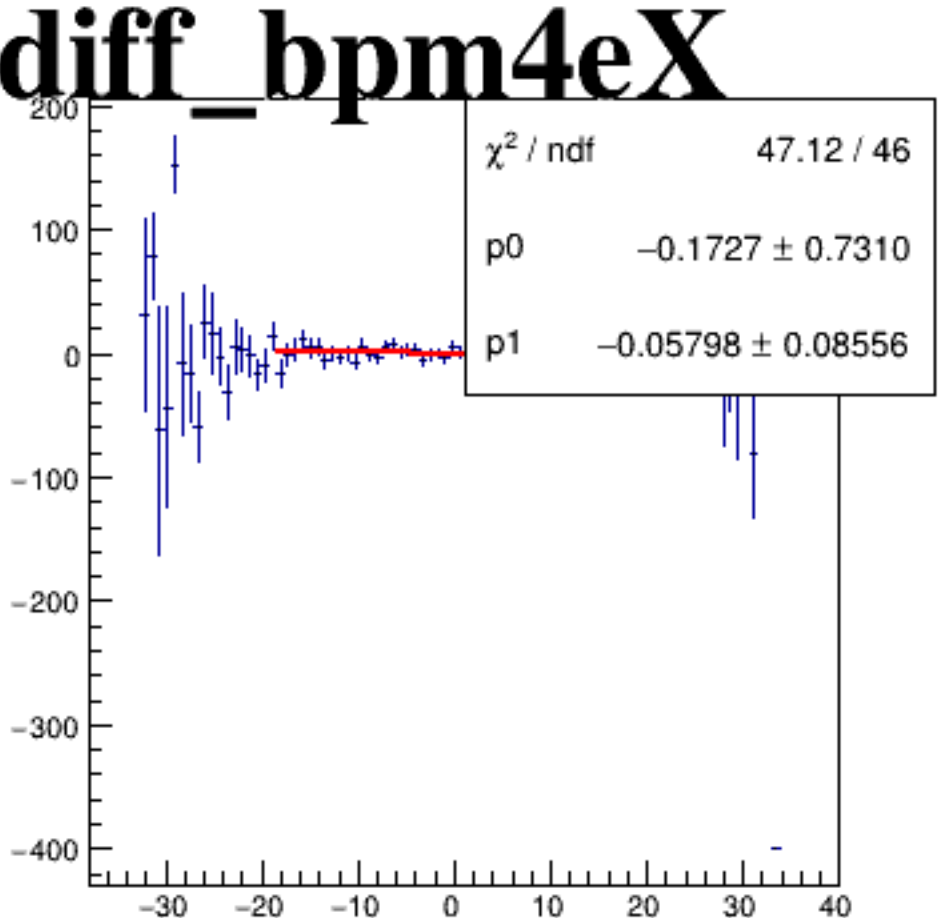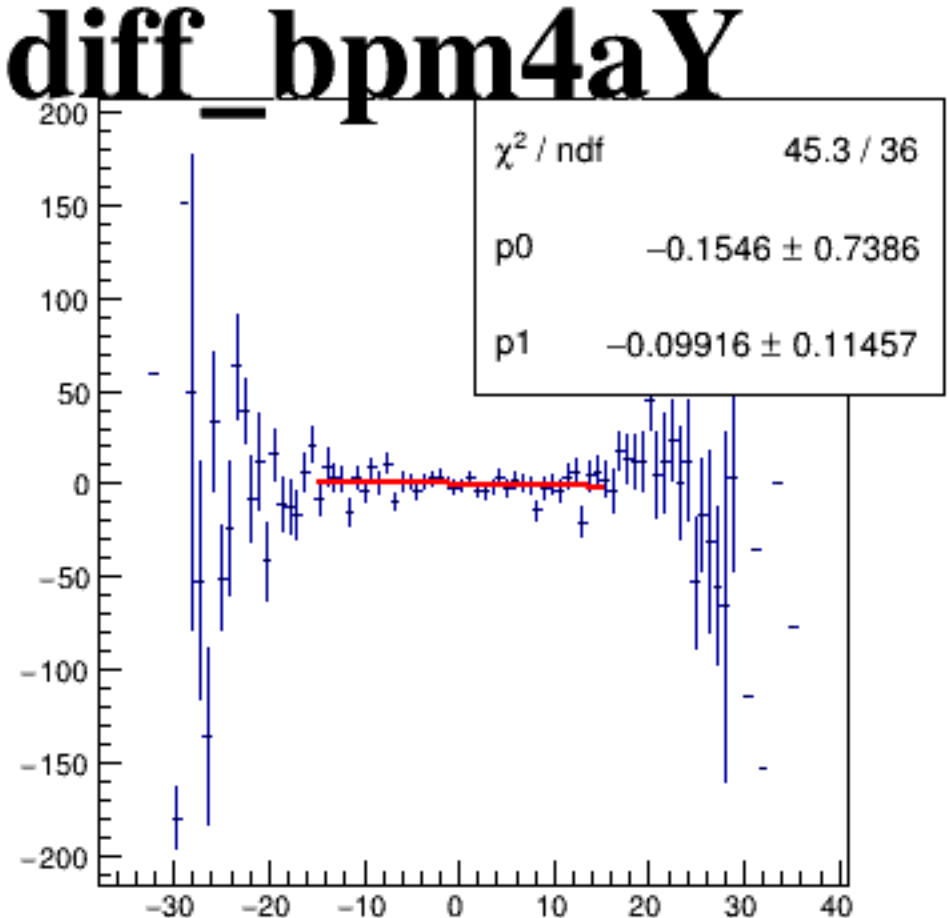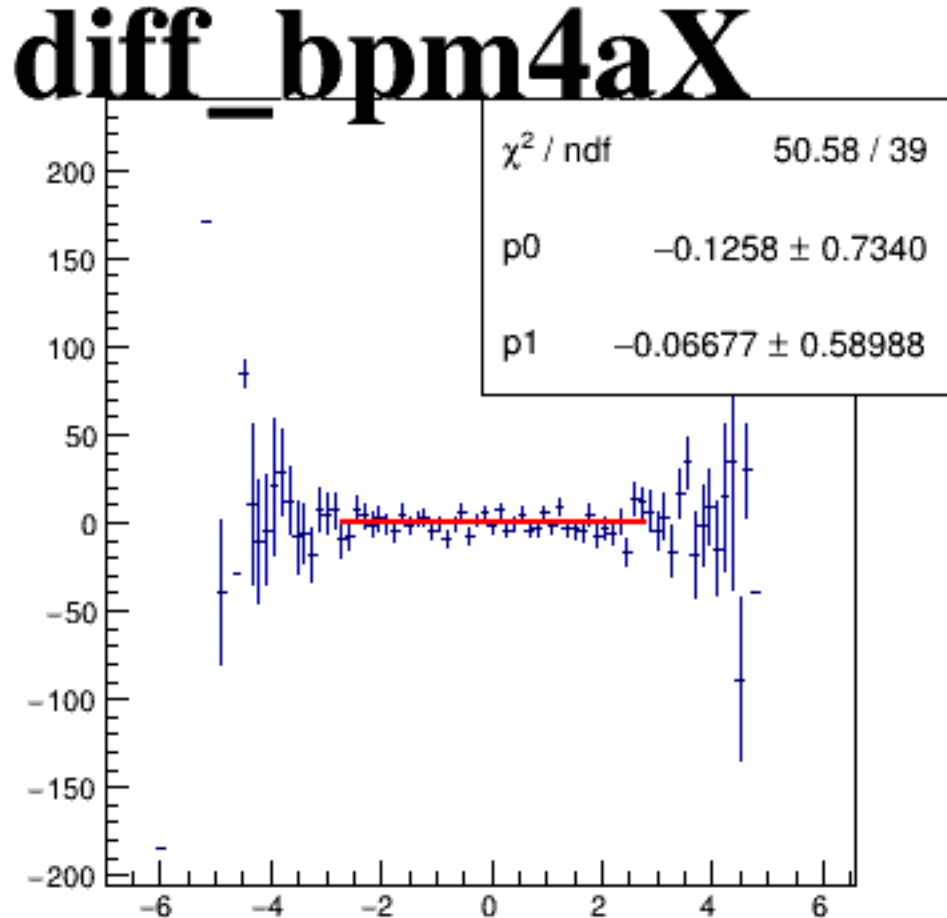






reg_asym_dsl

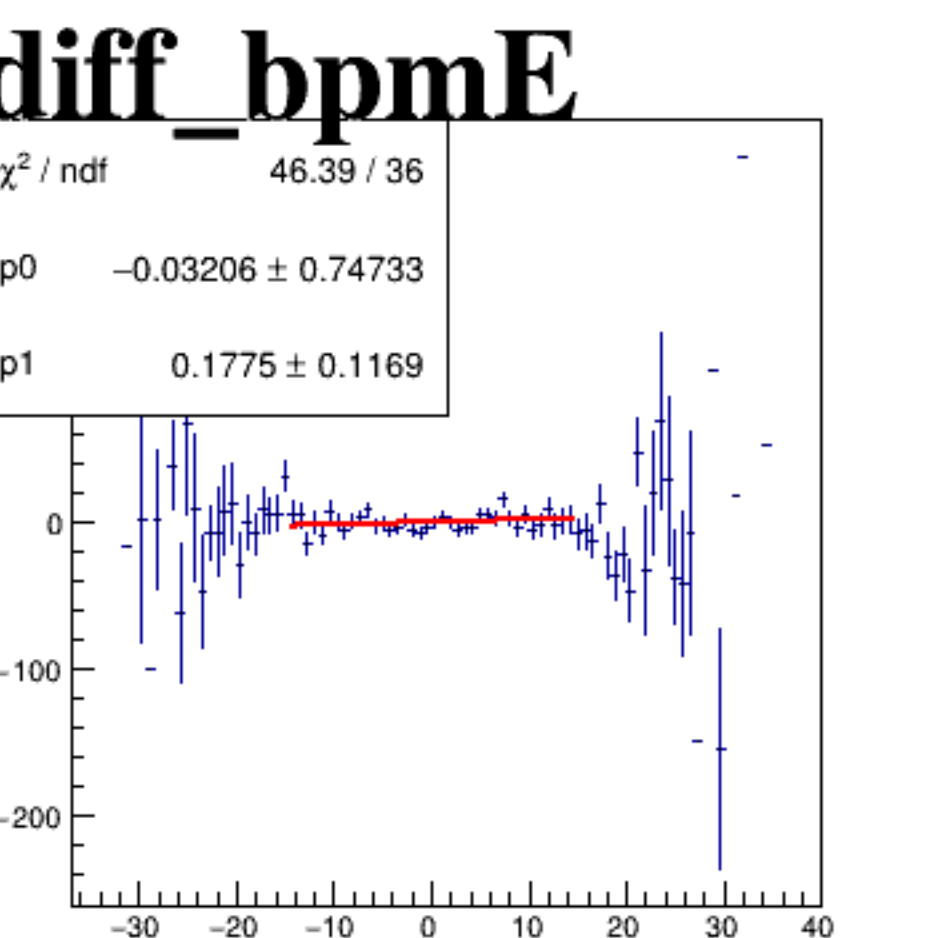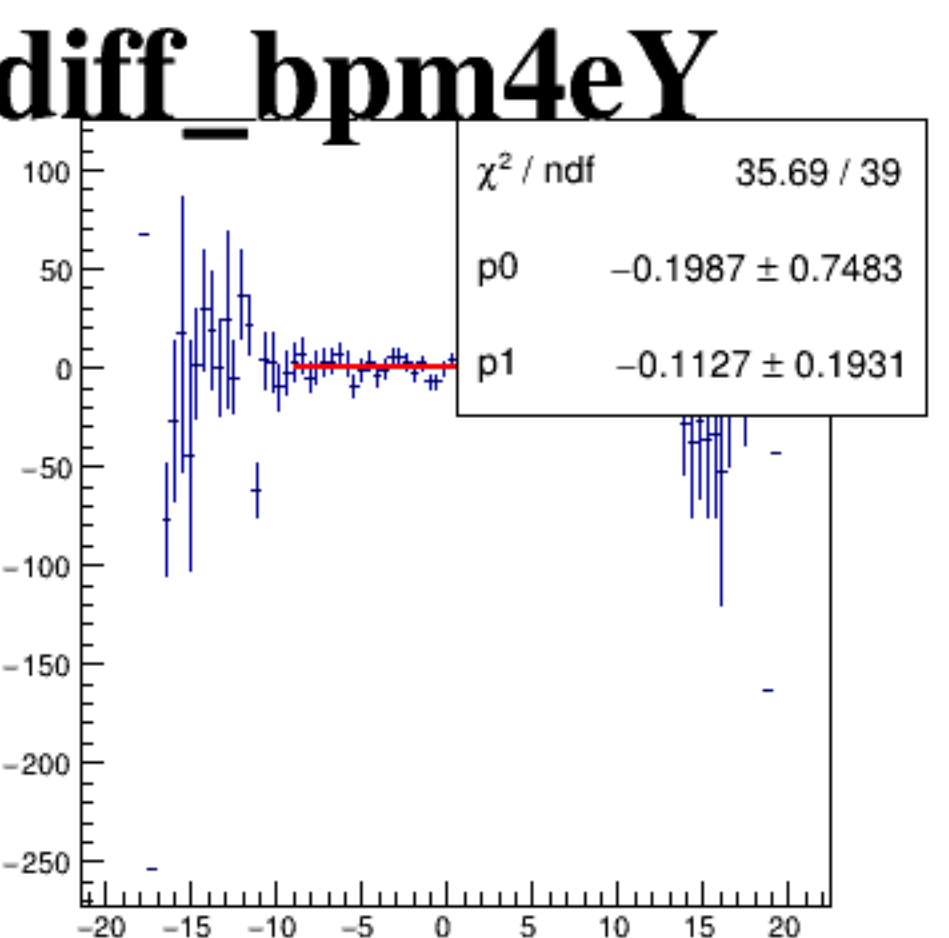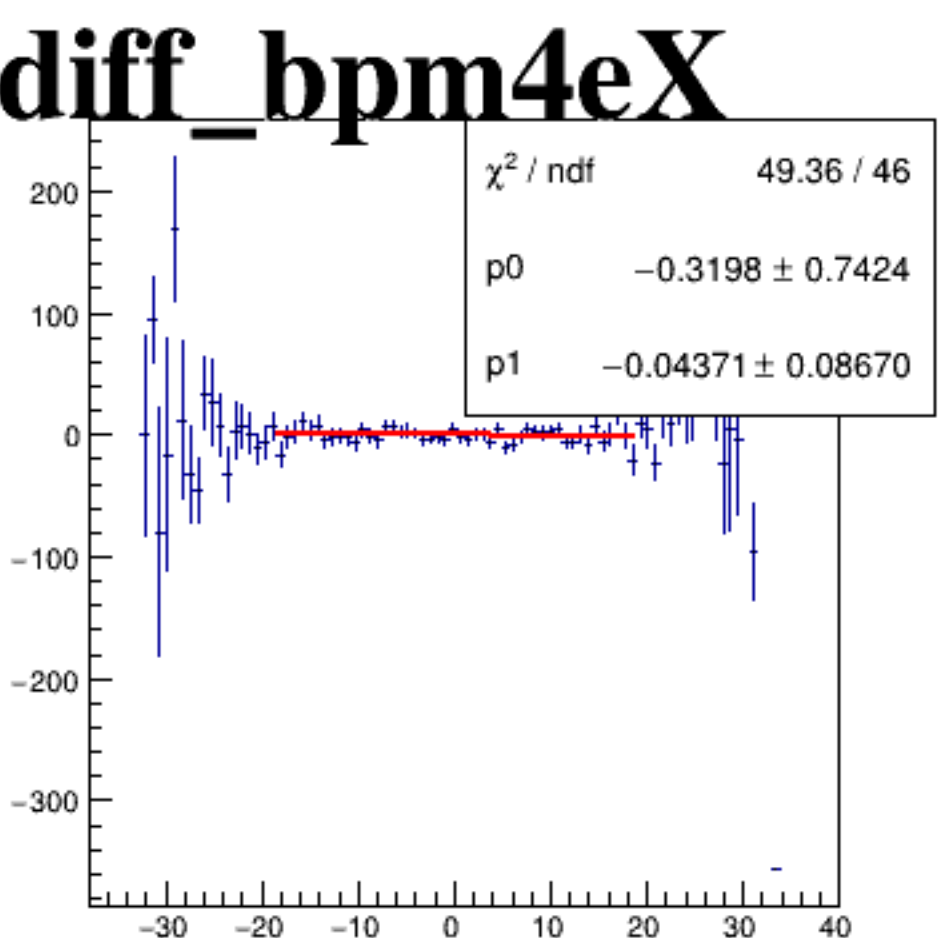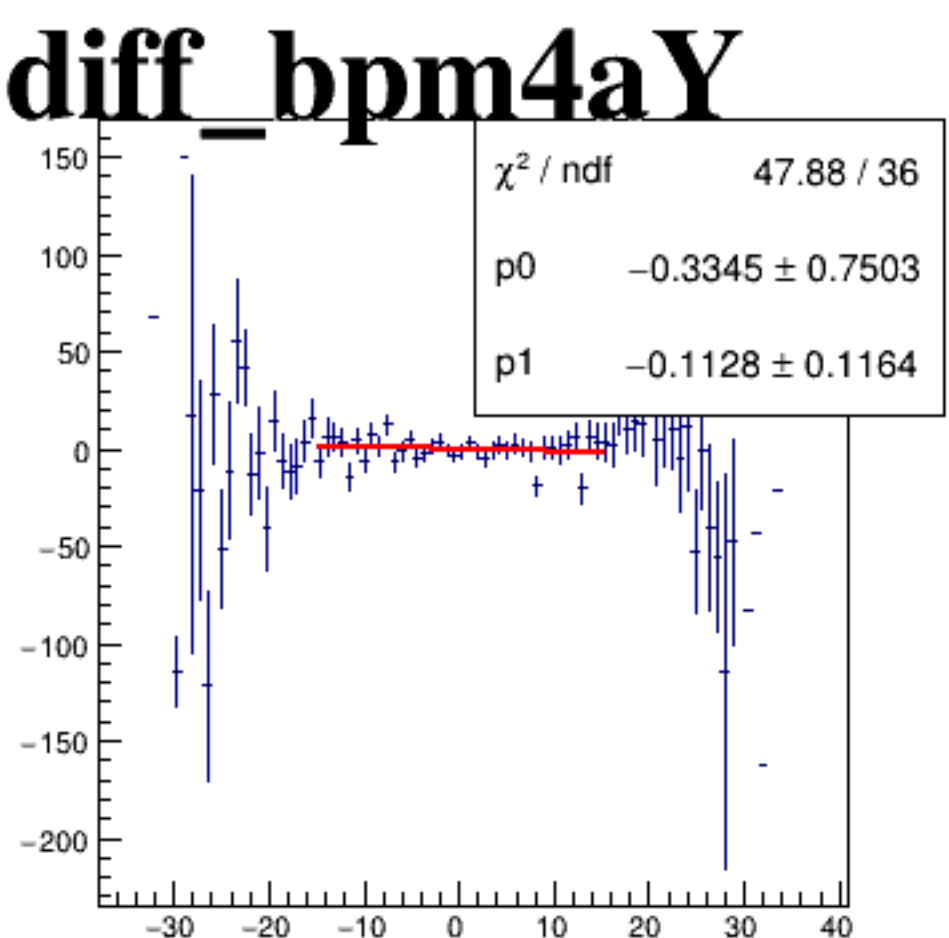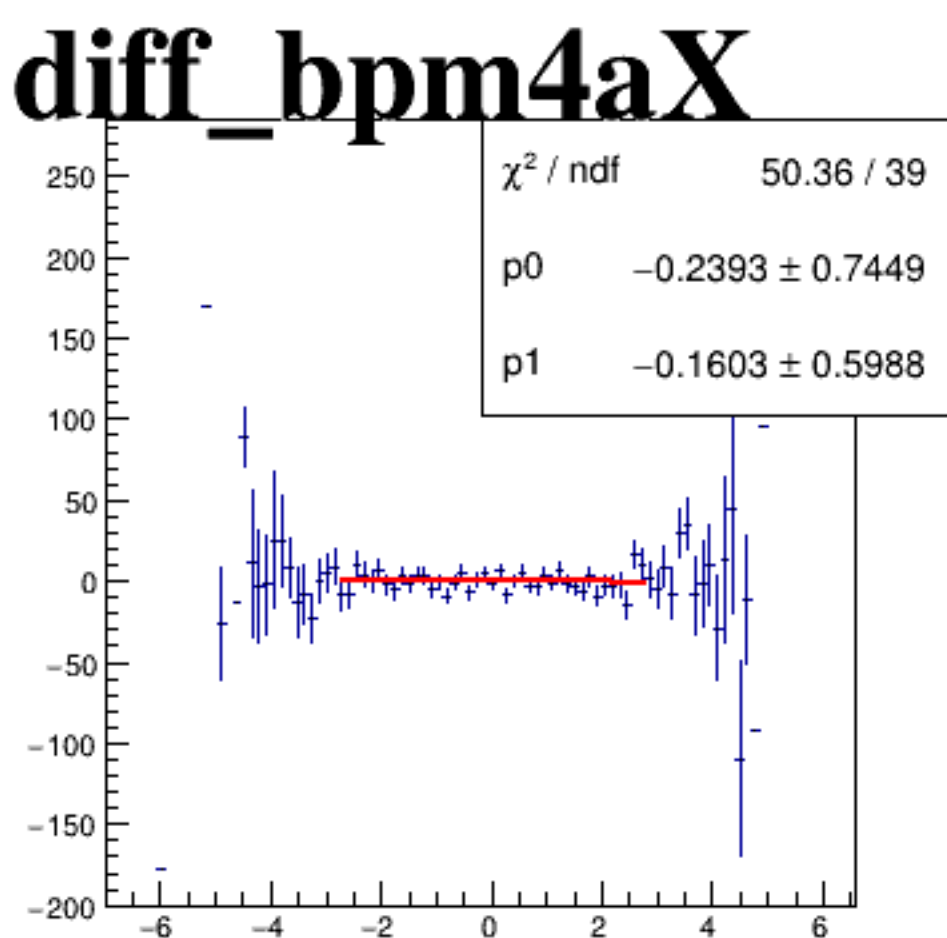






reg_asym_usr

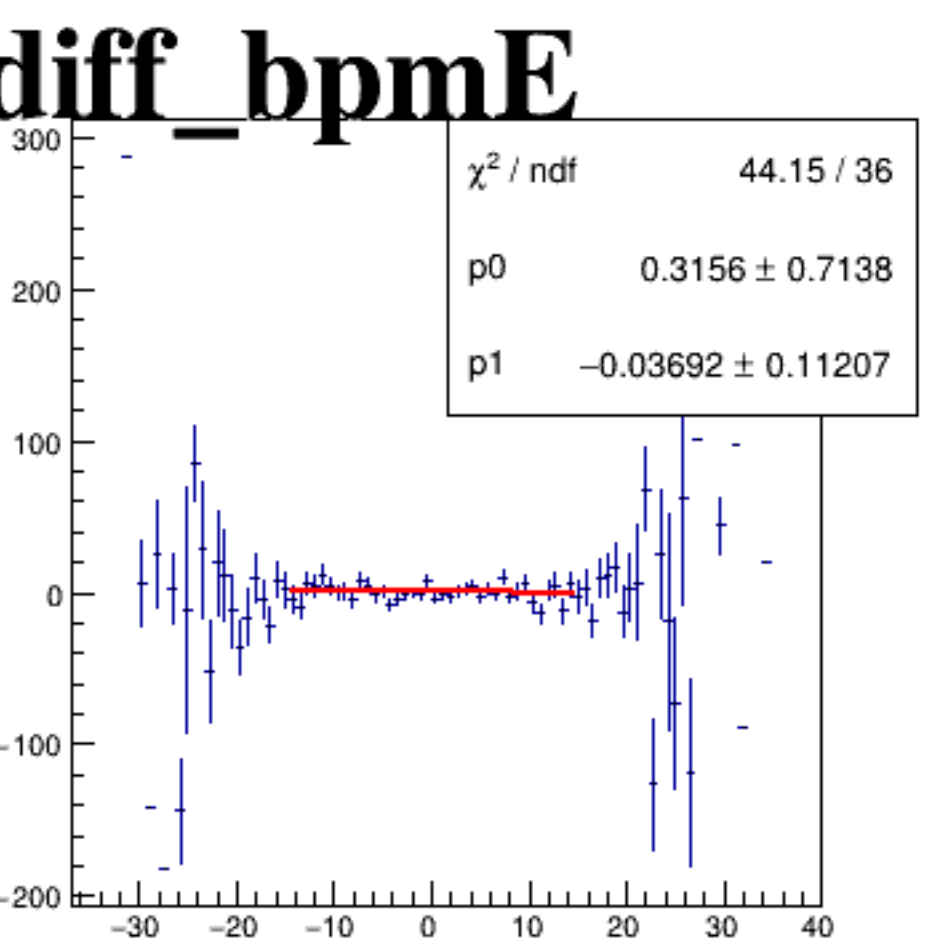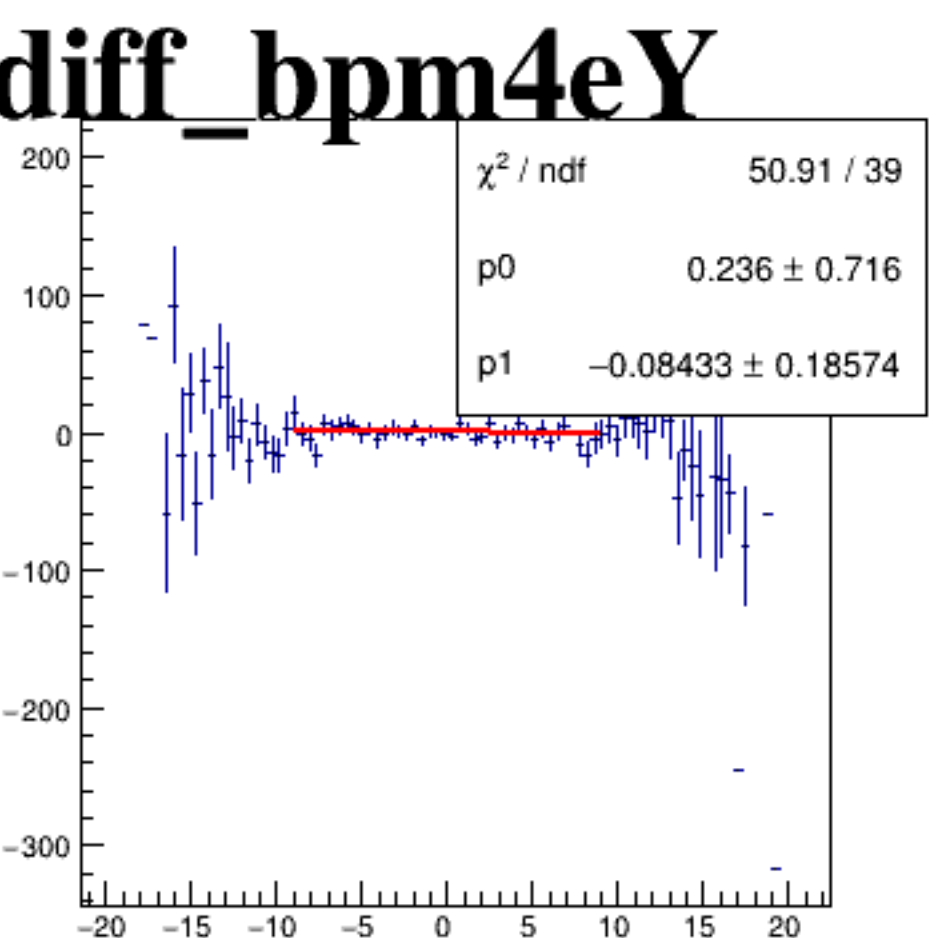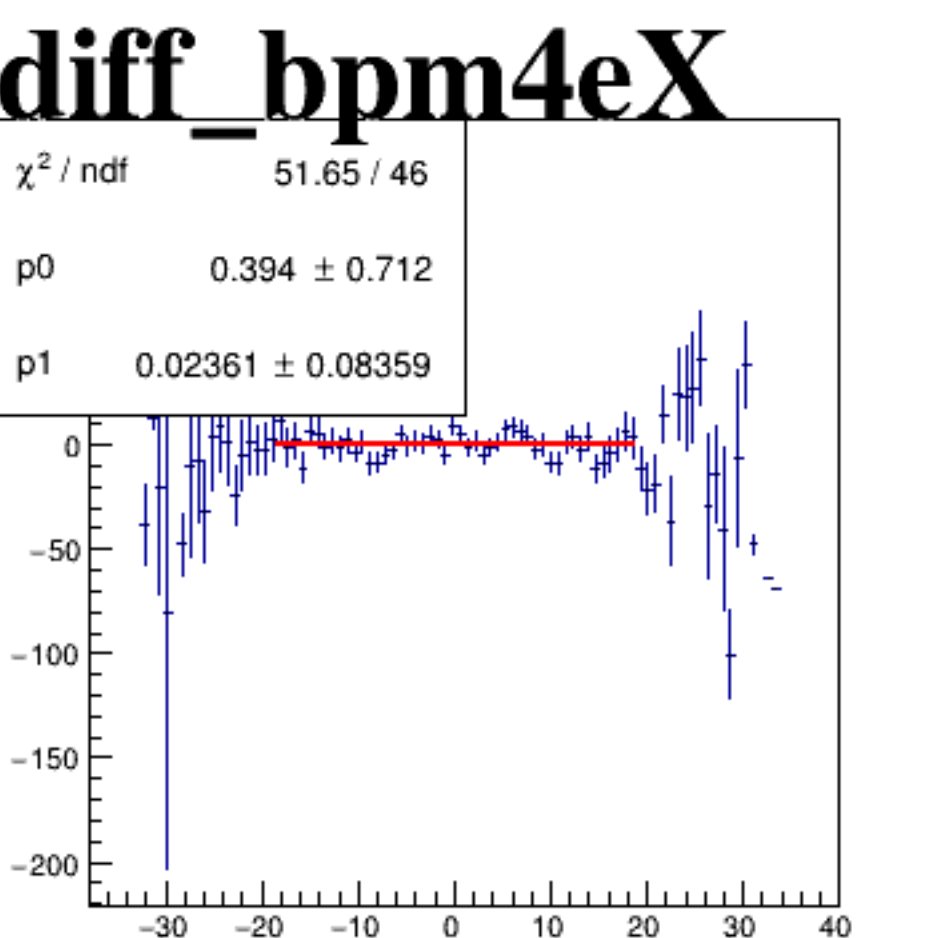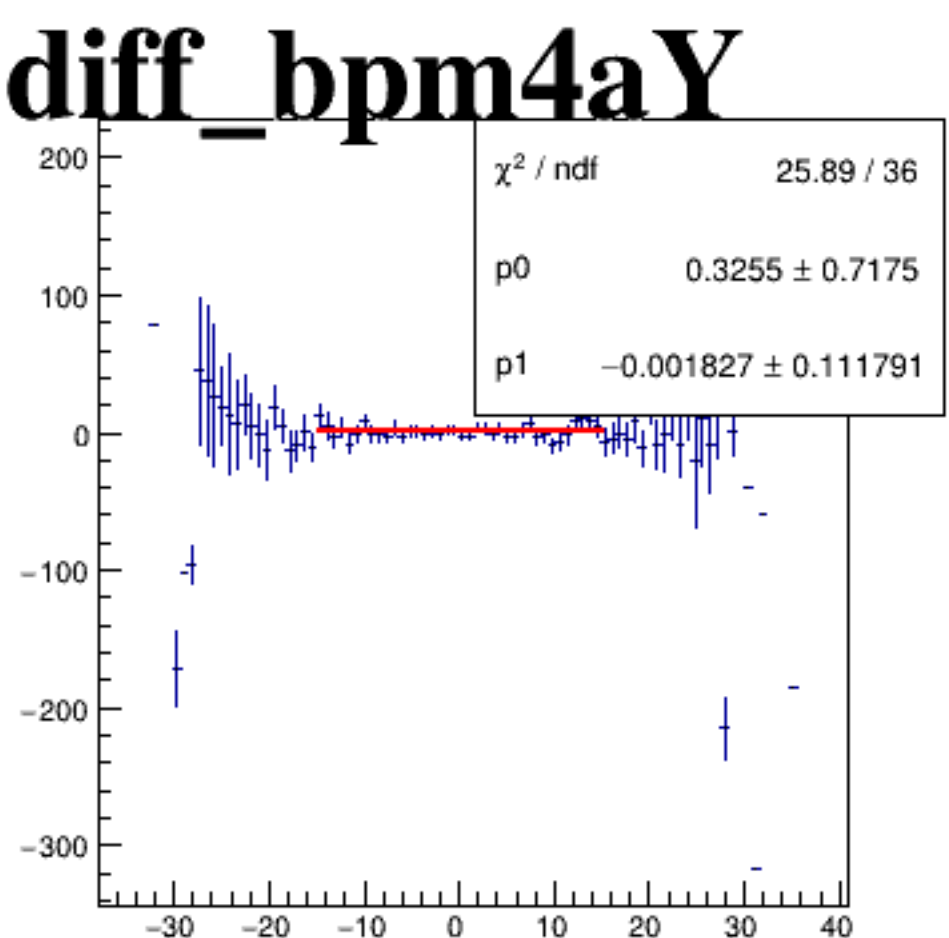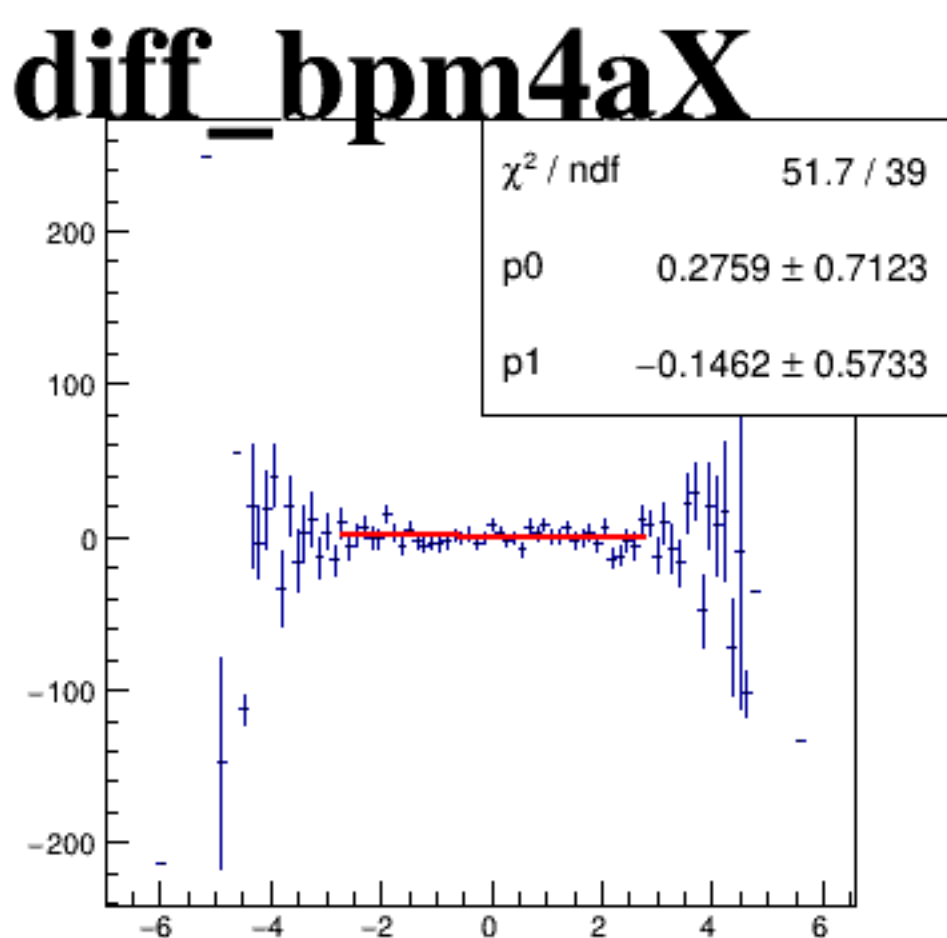






reg_asym_dsr

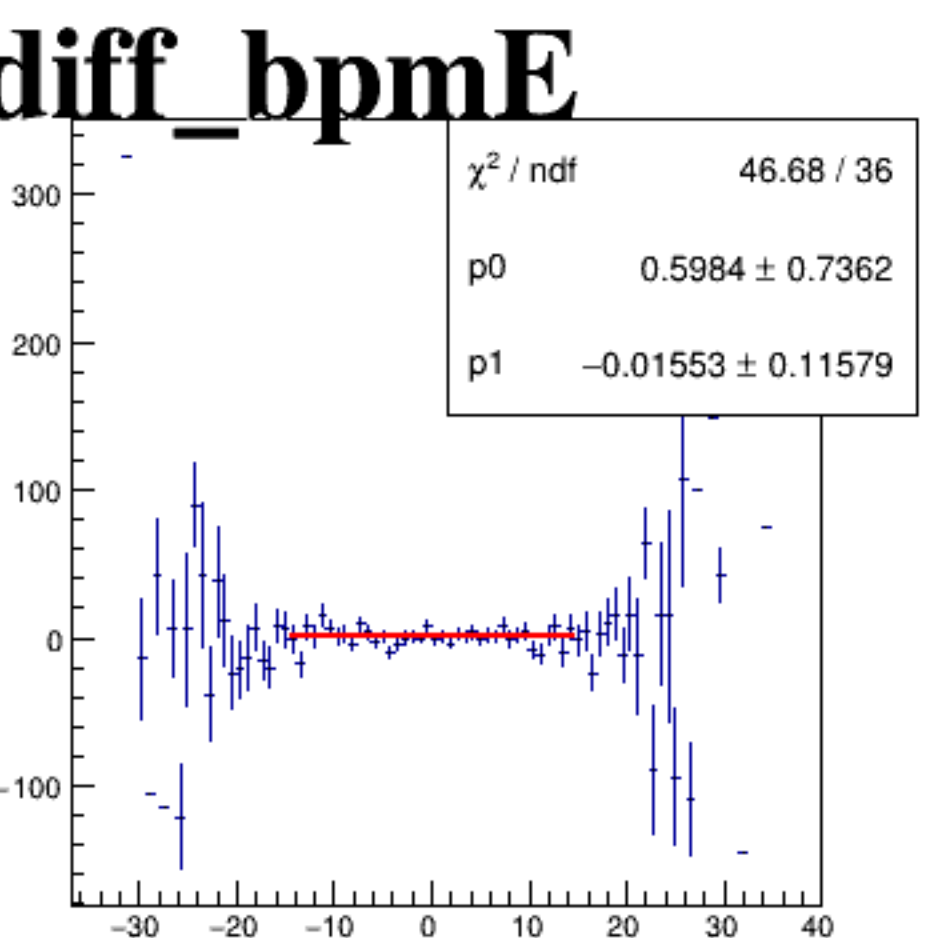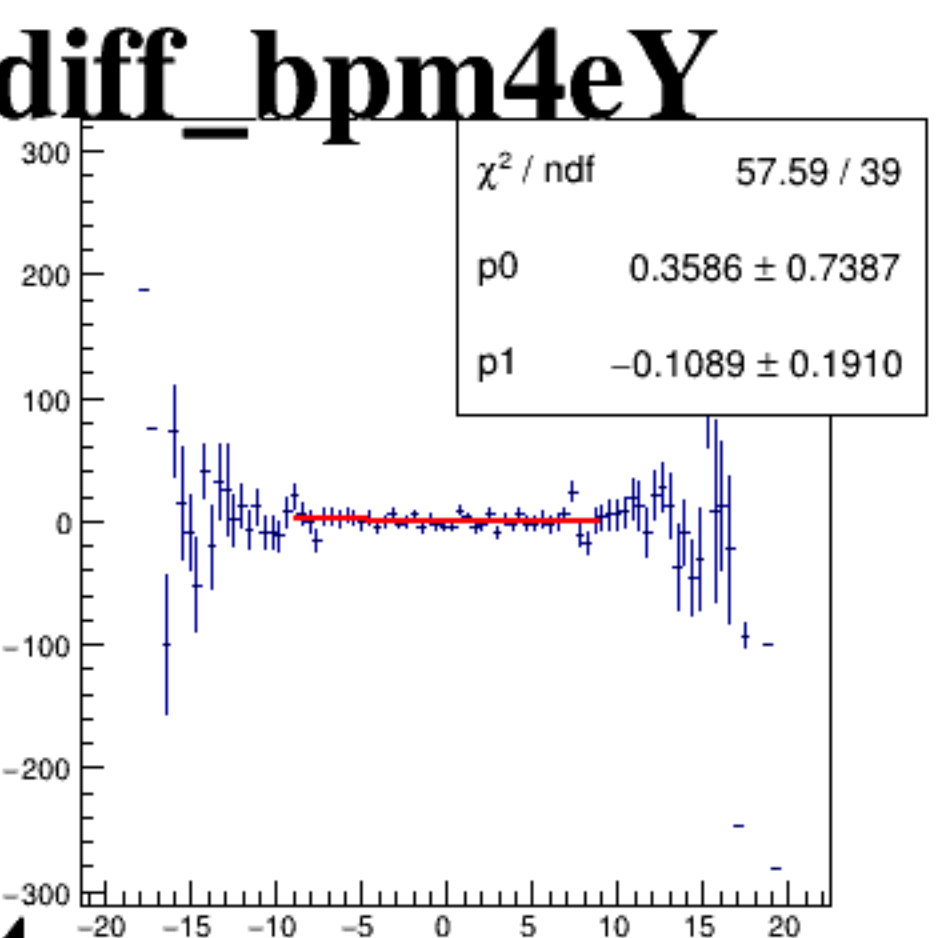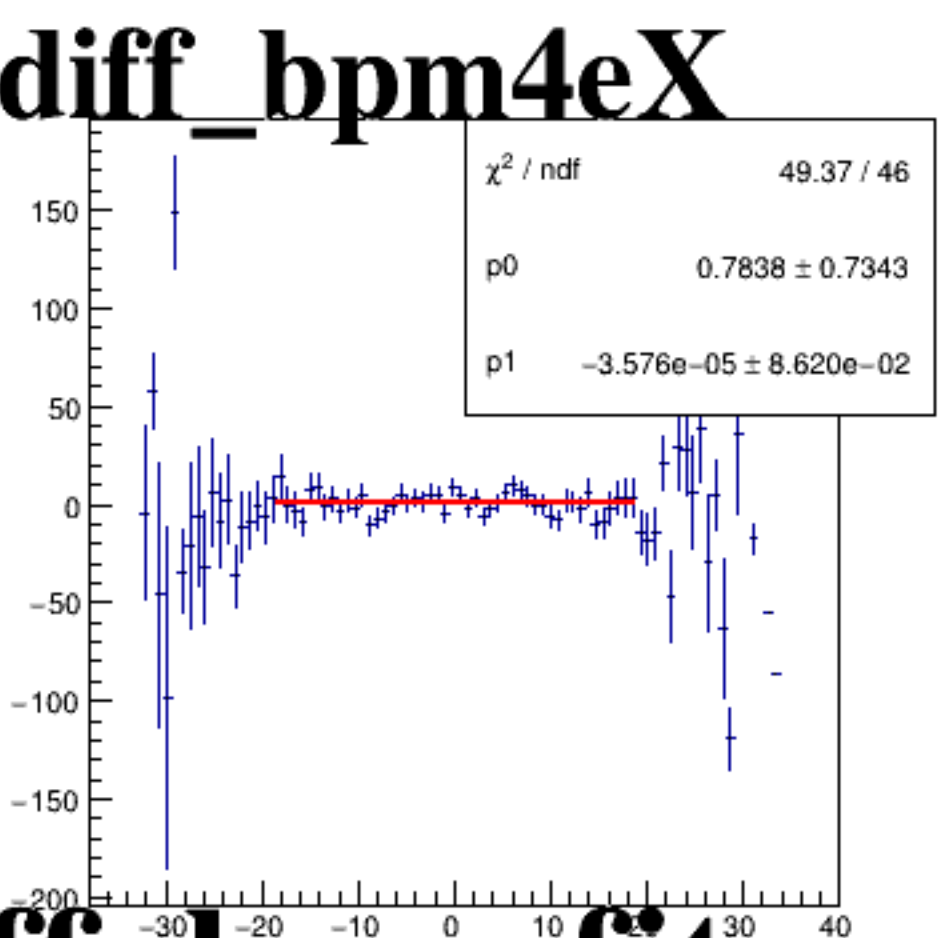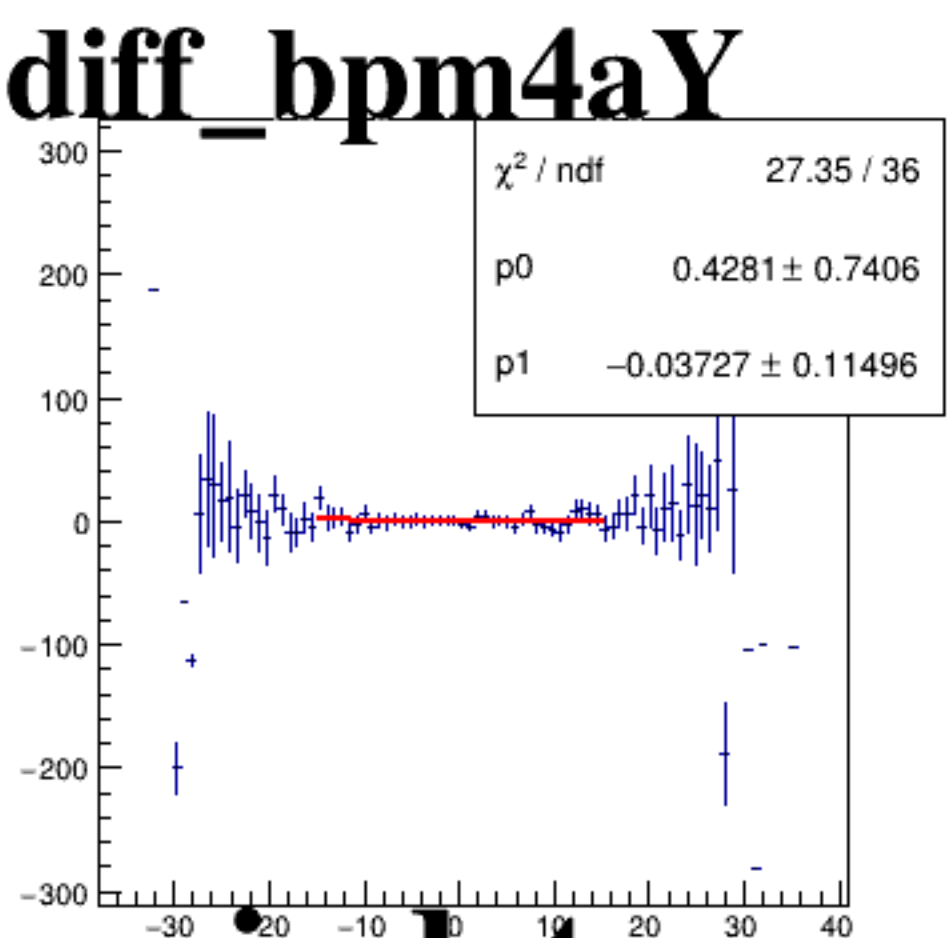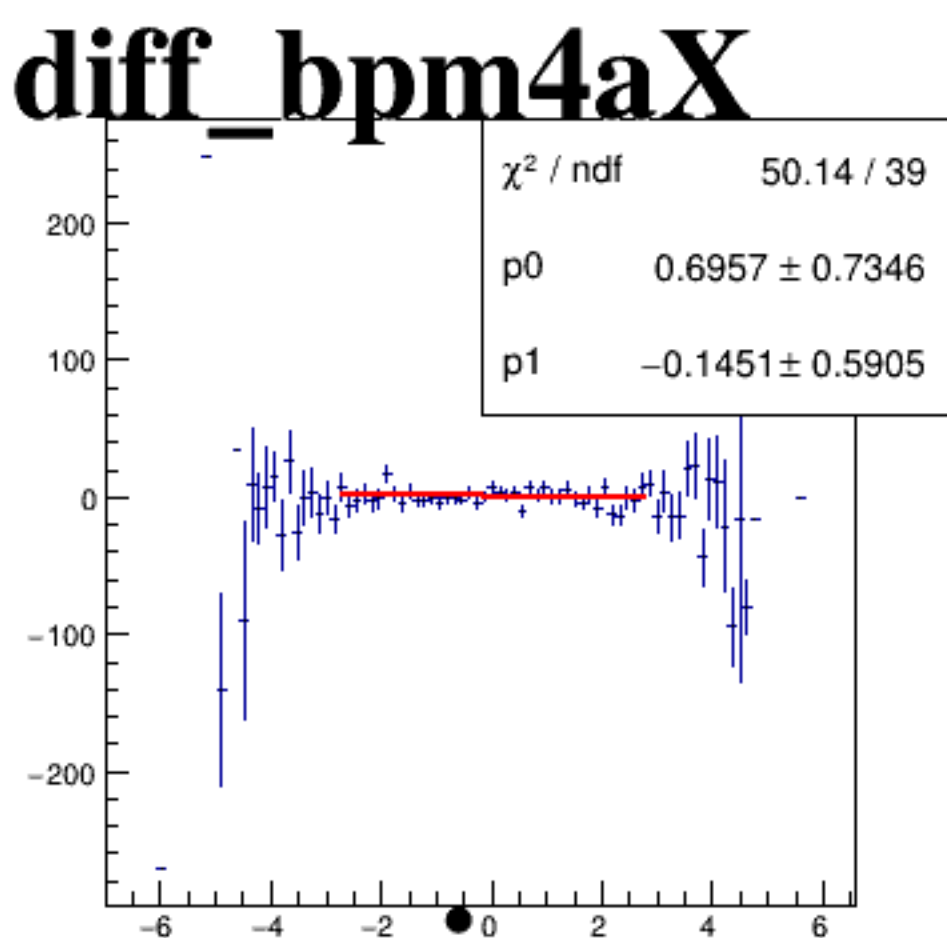






asym_usl

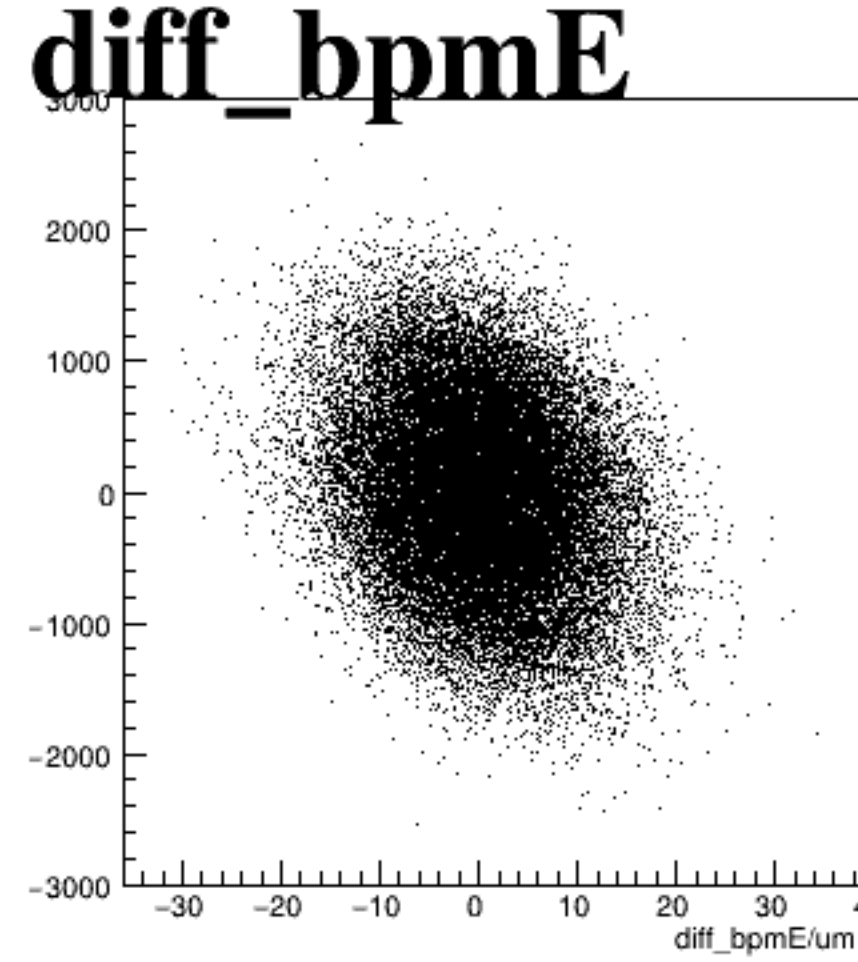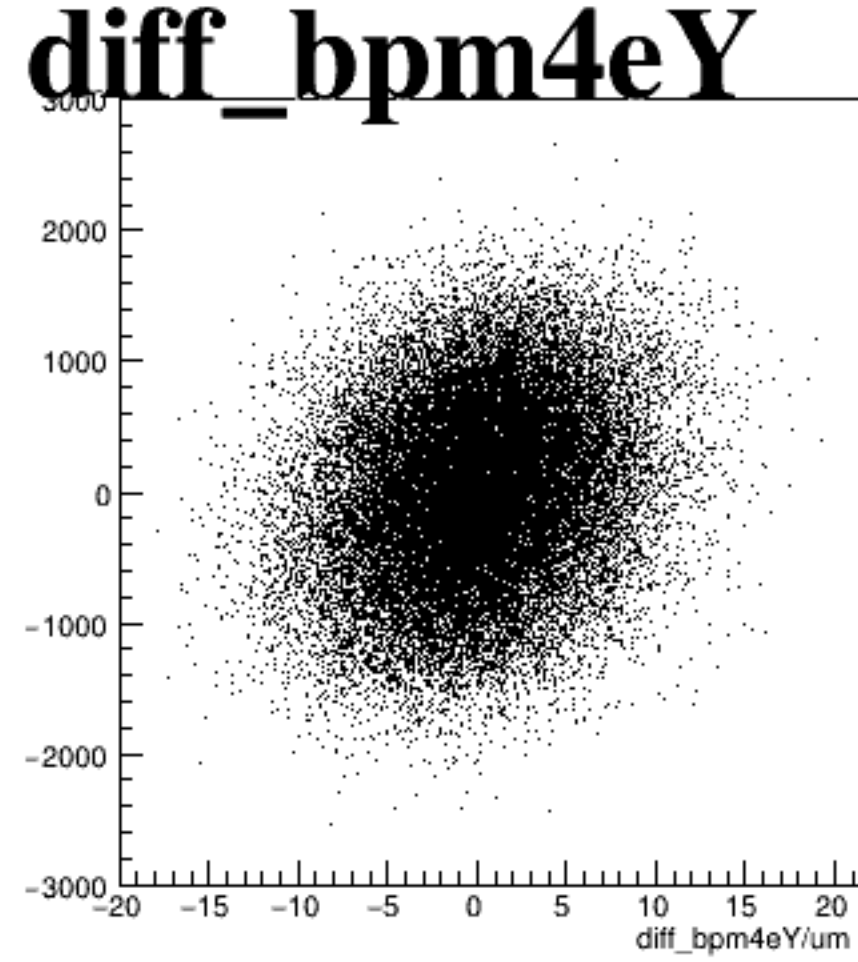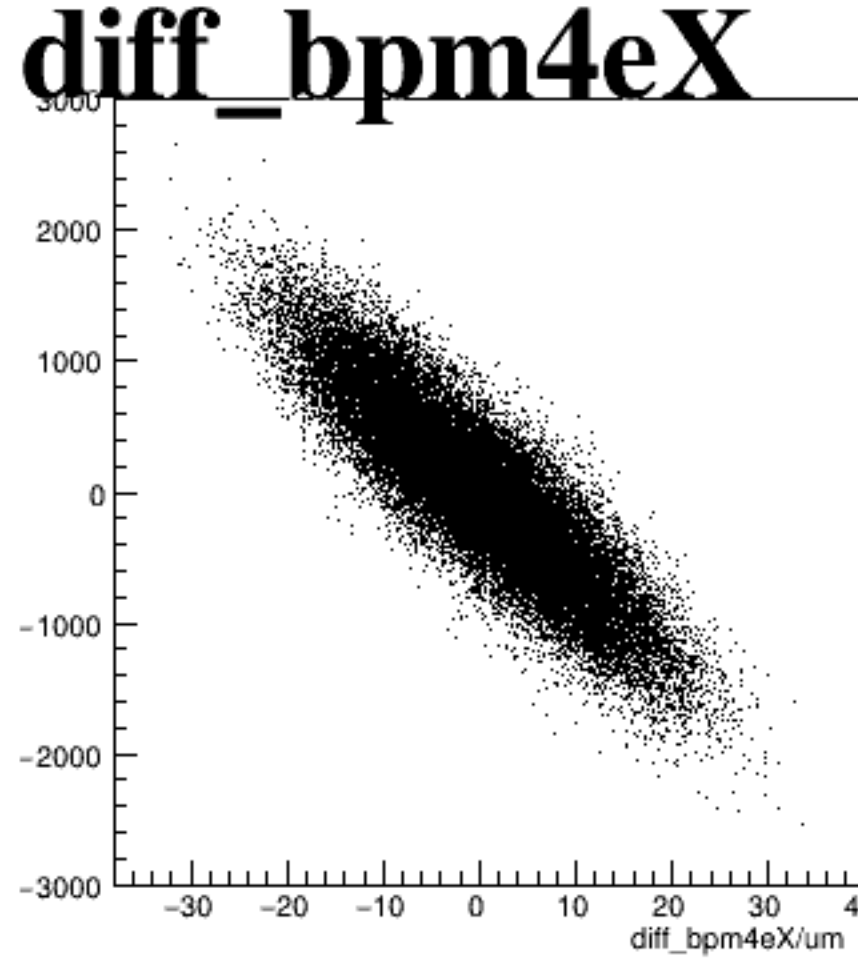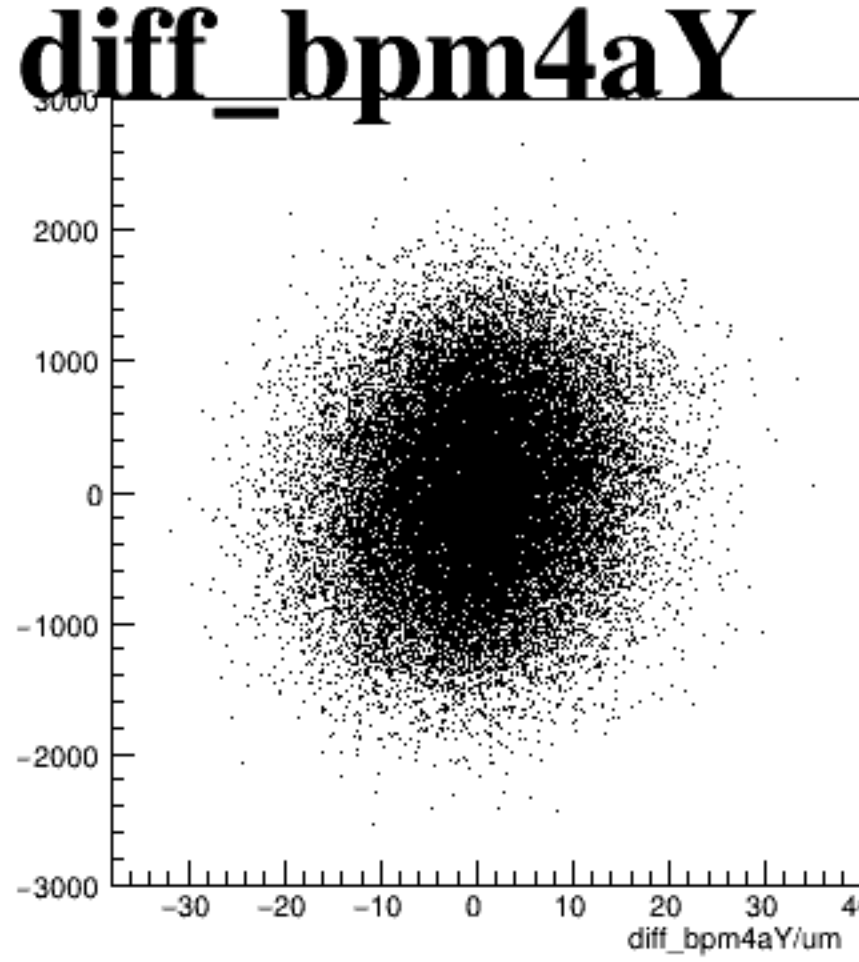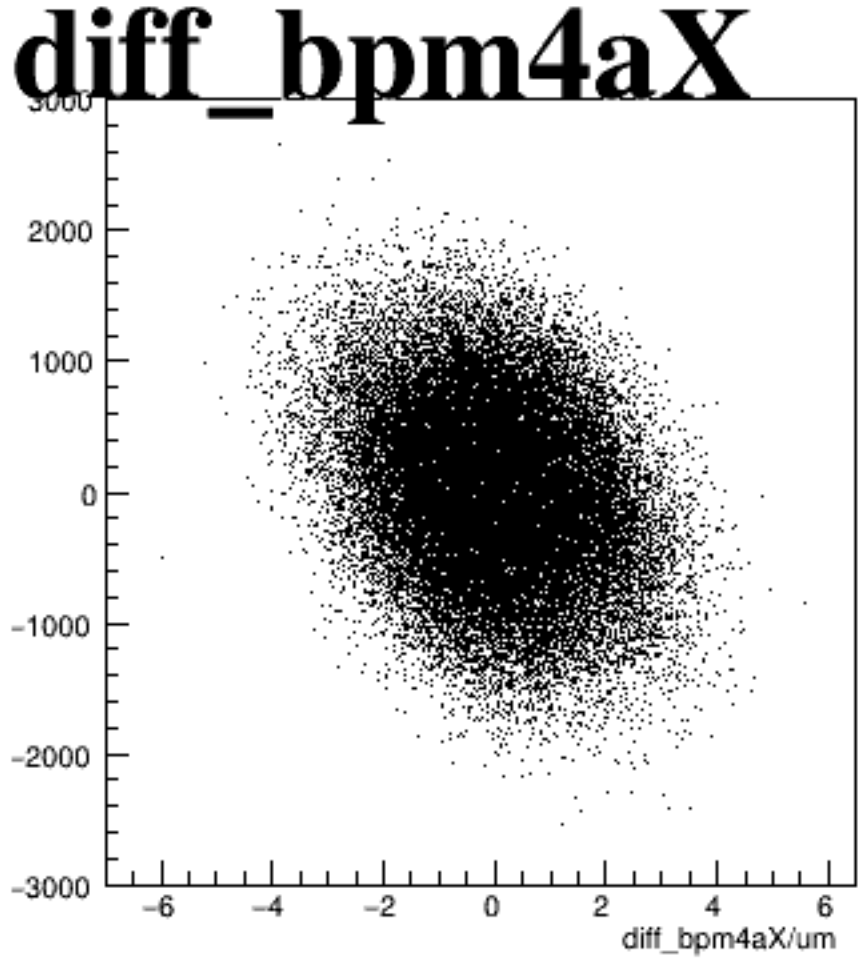






asym_dsl

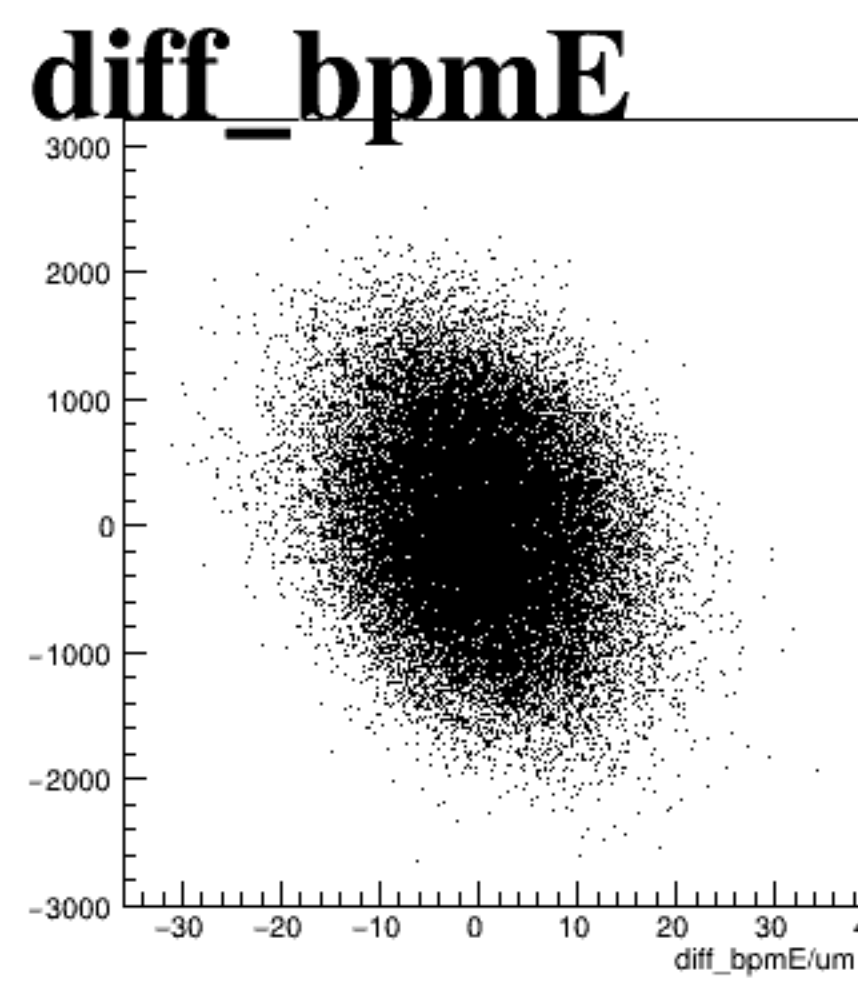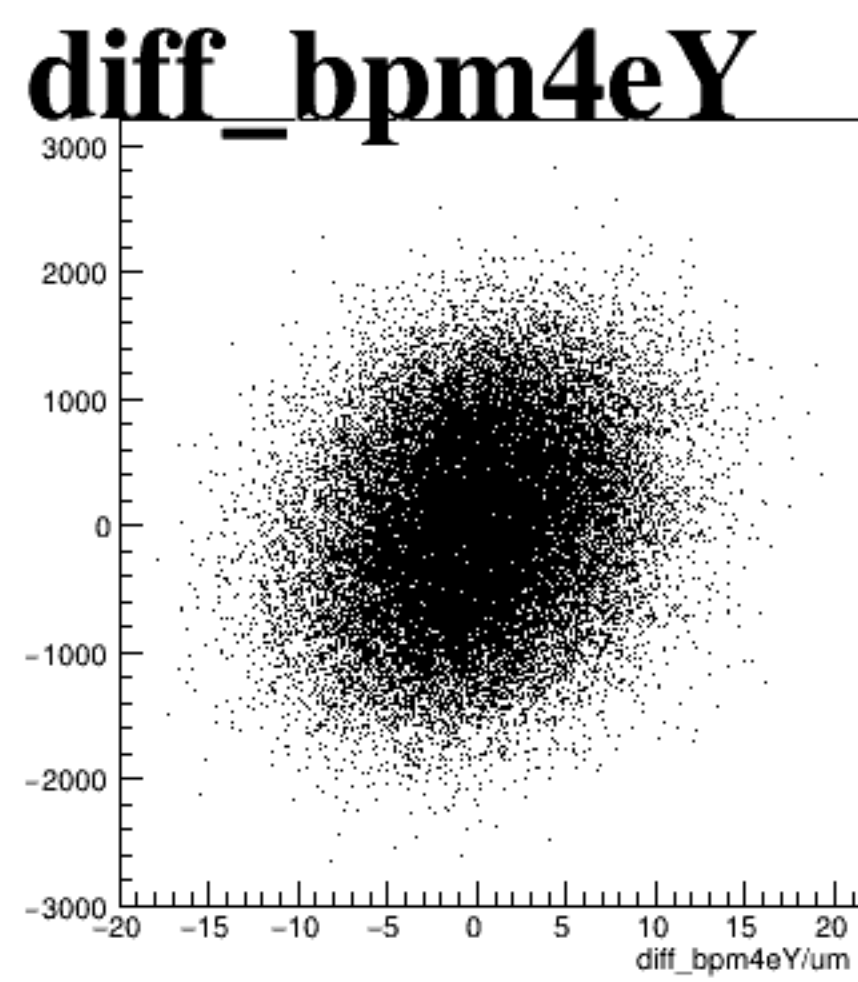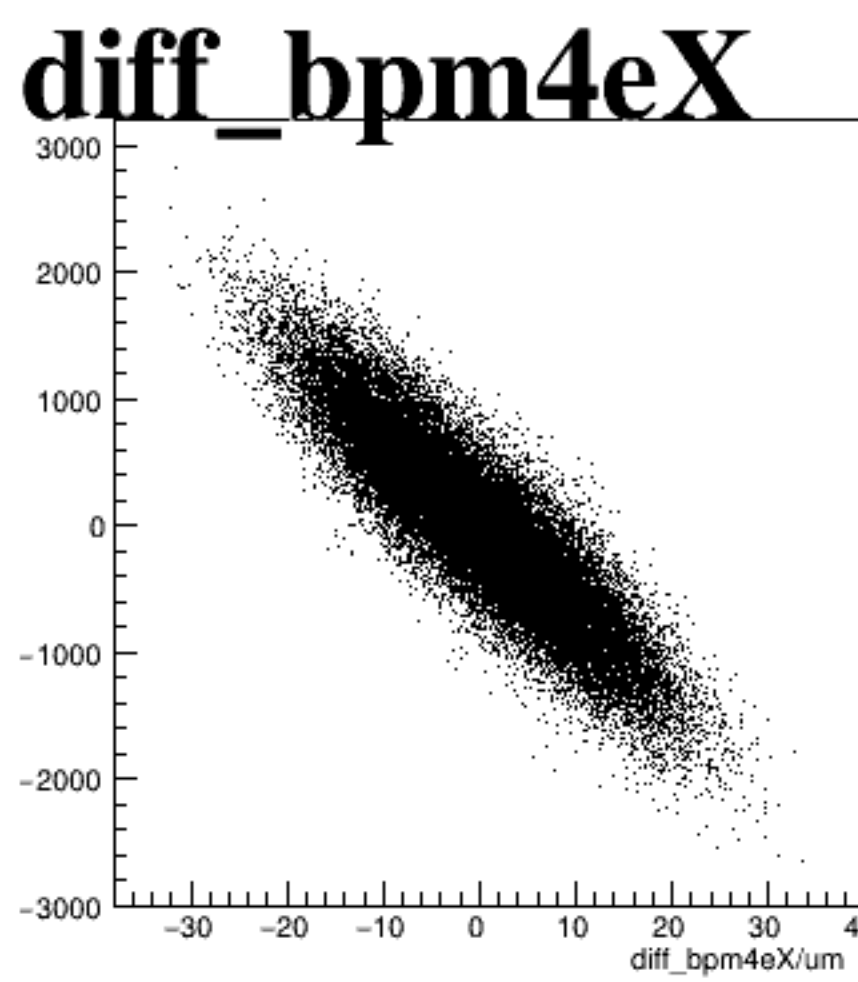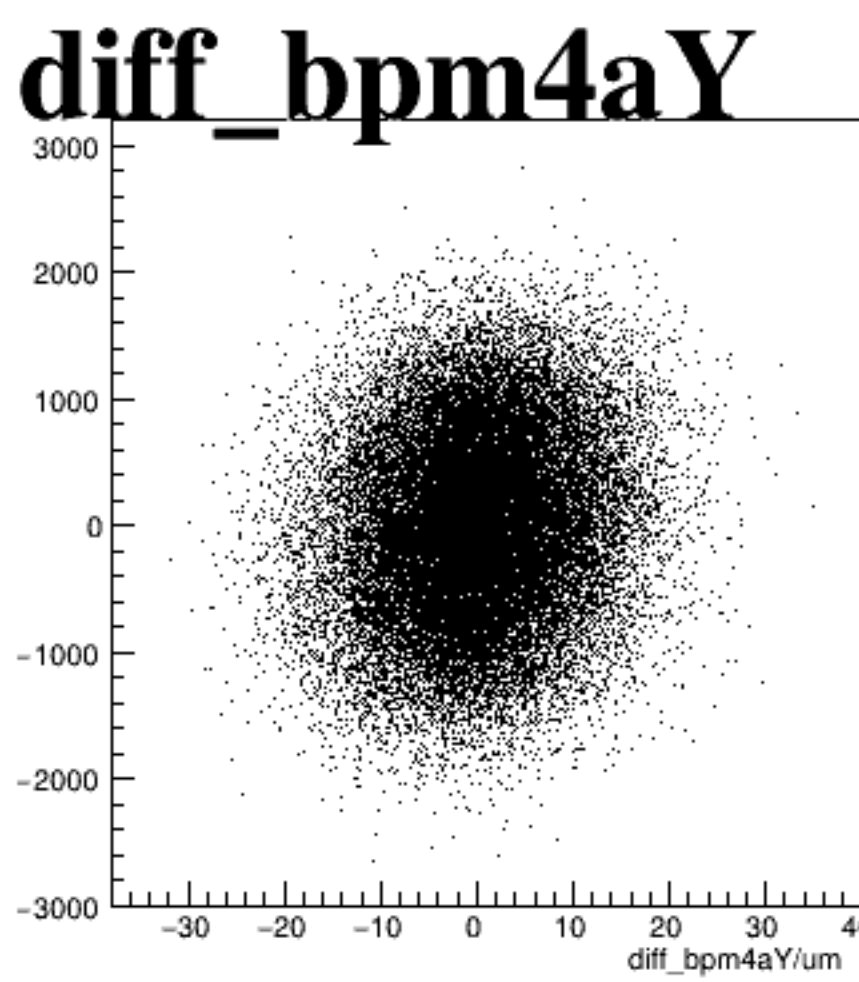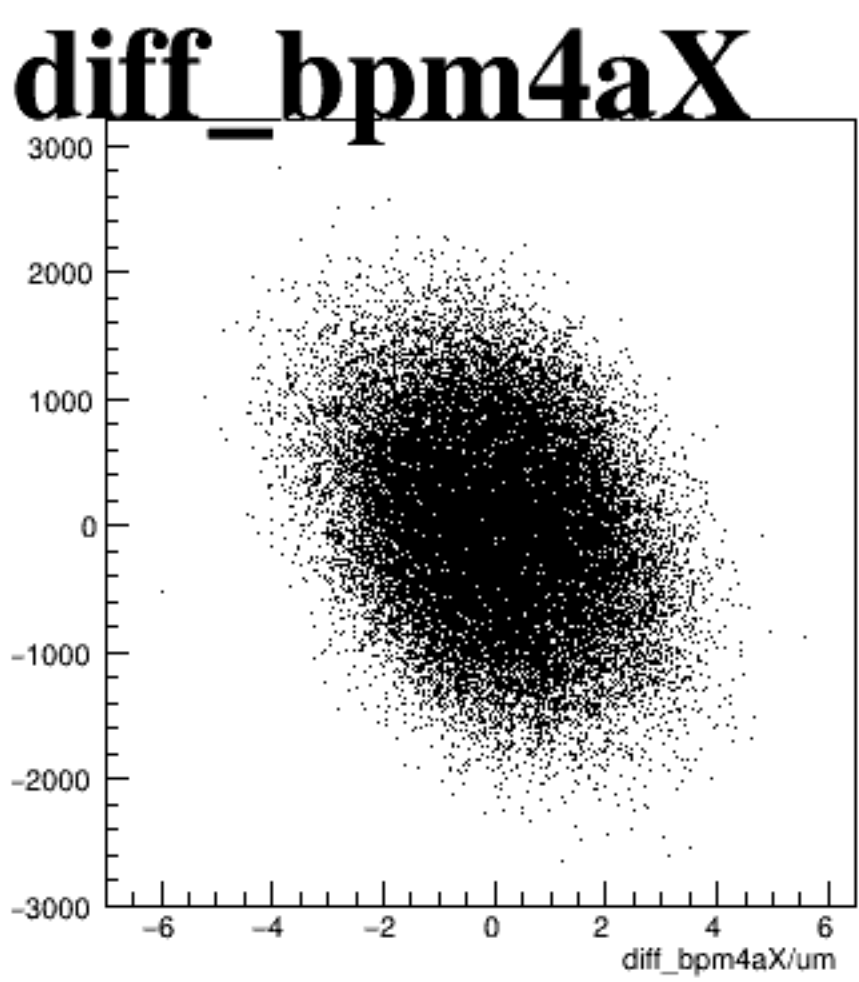

asym_usr

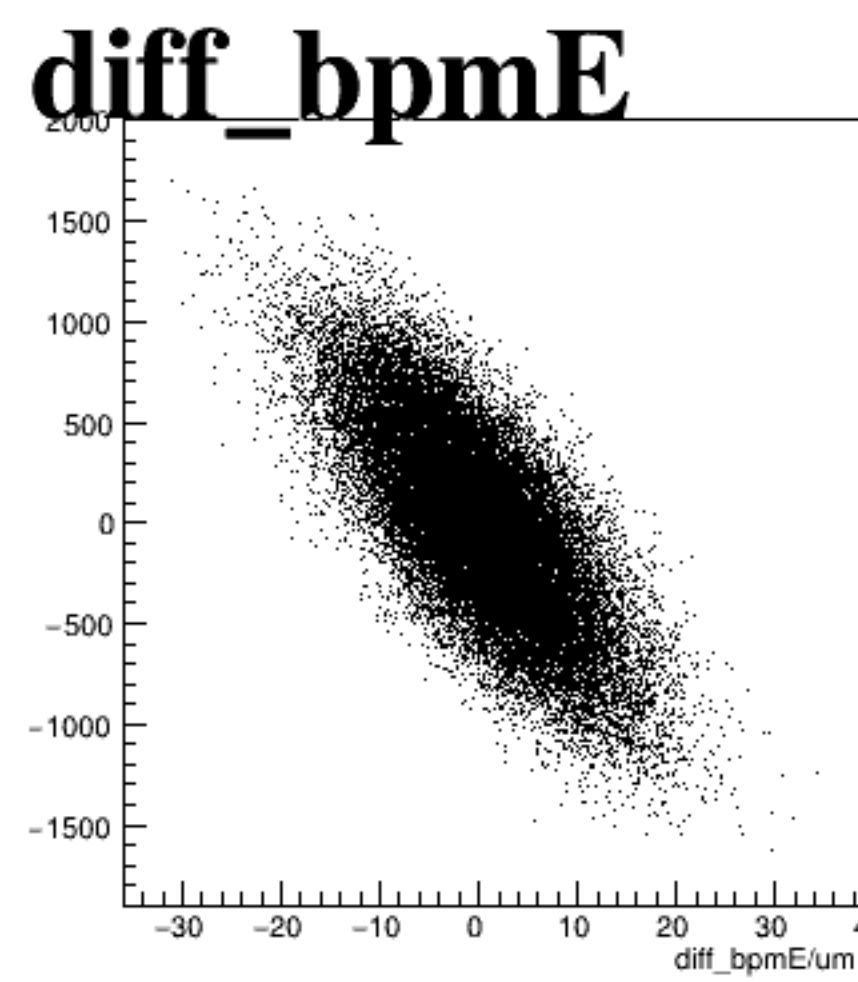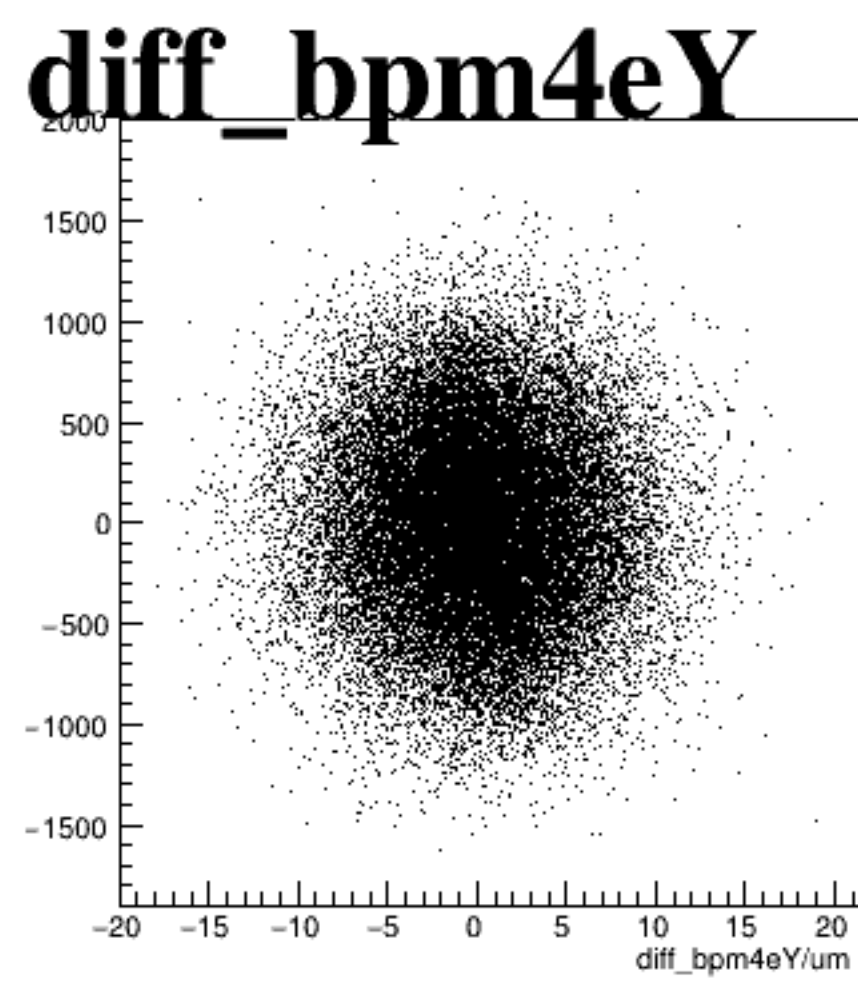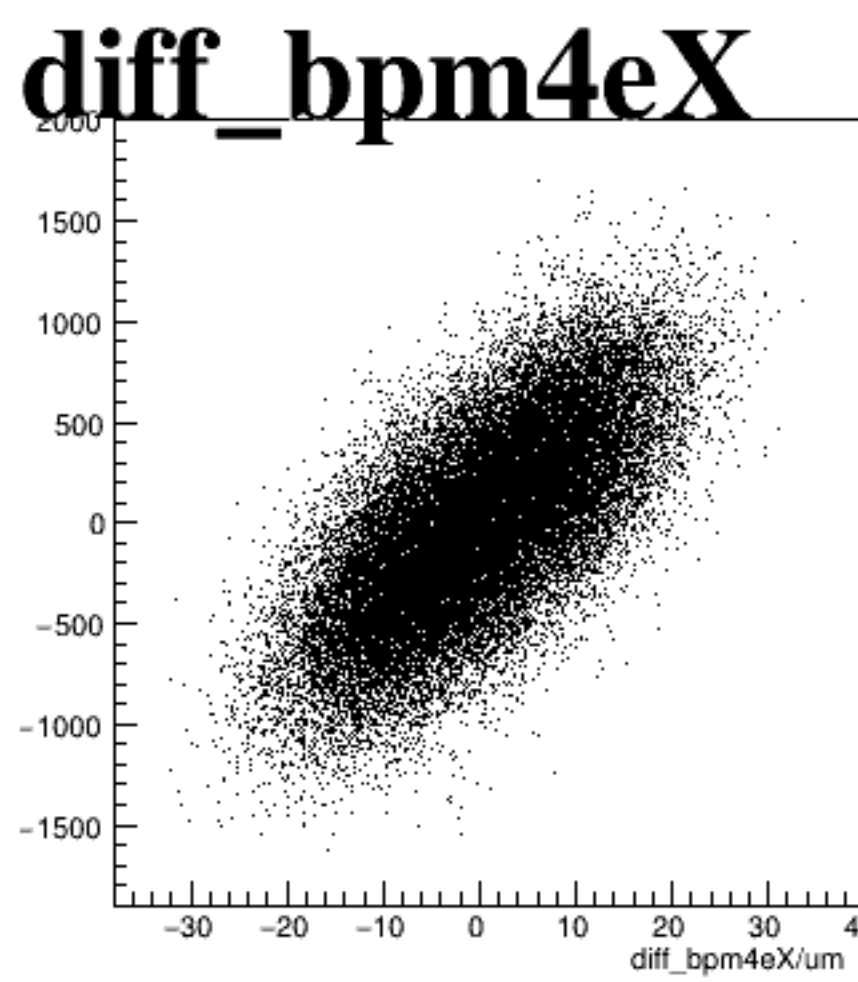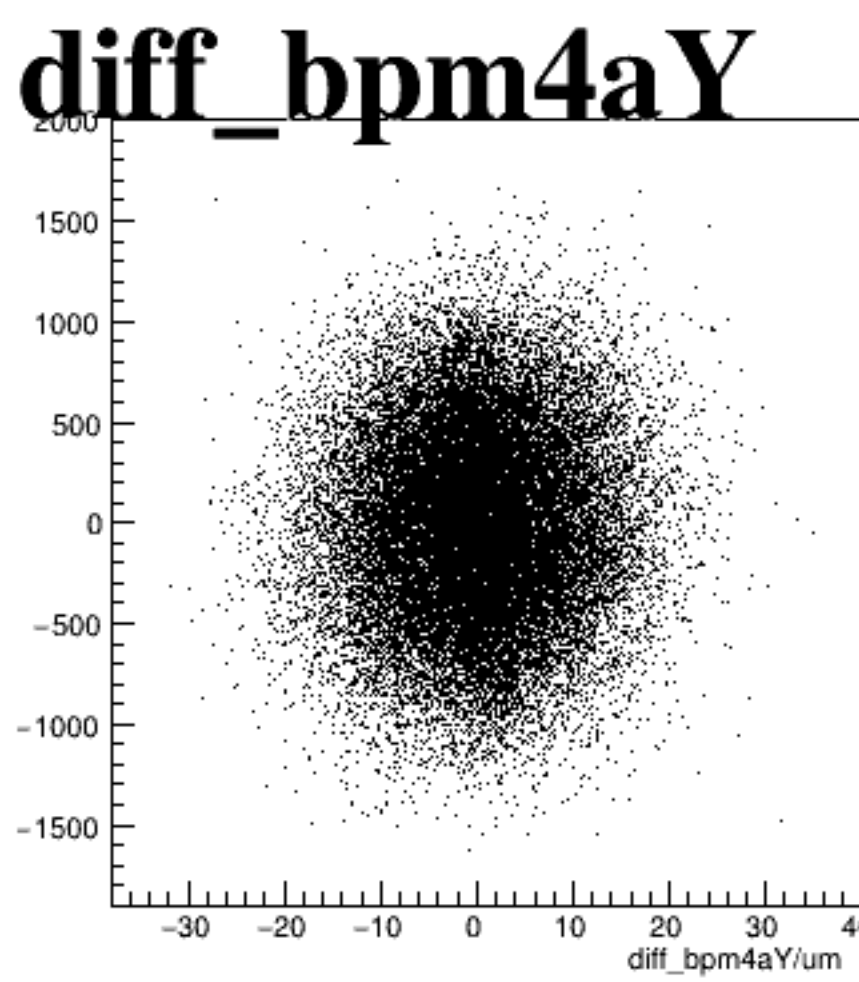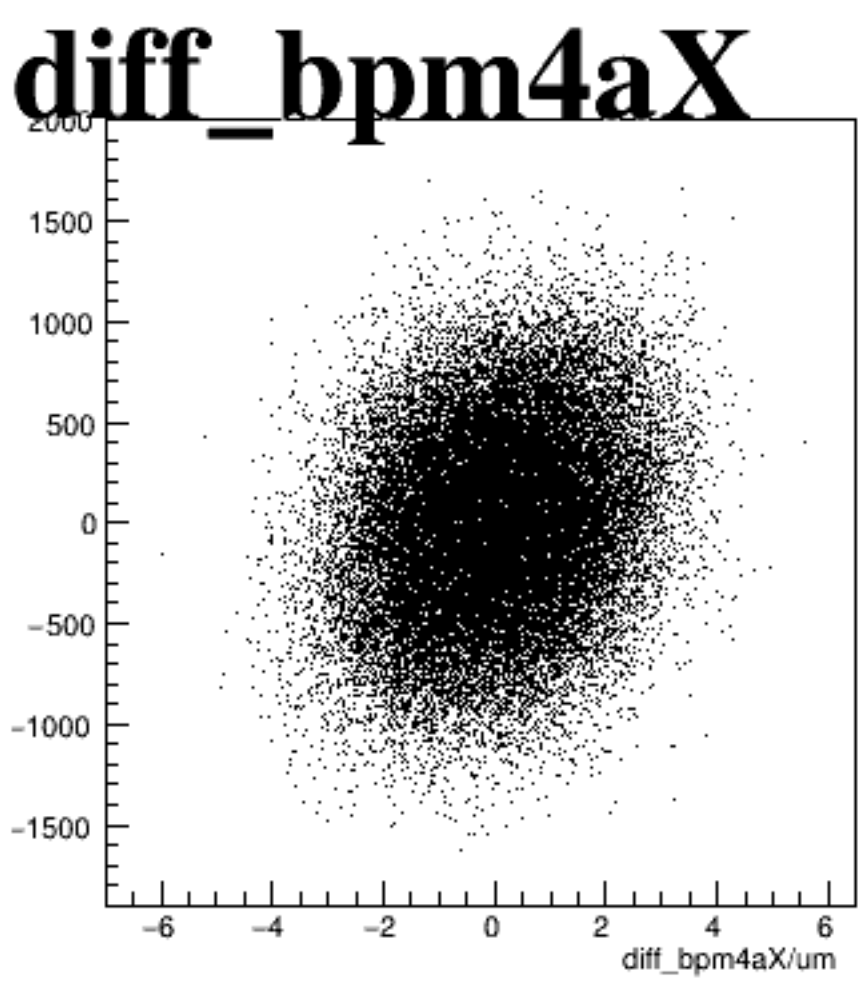

asym_dsr

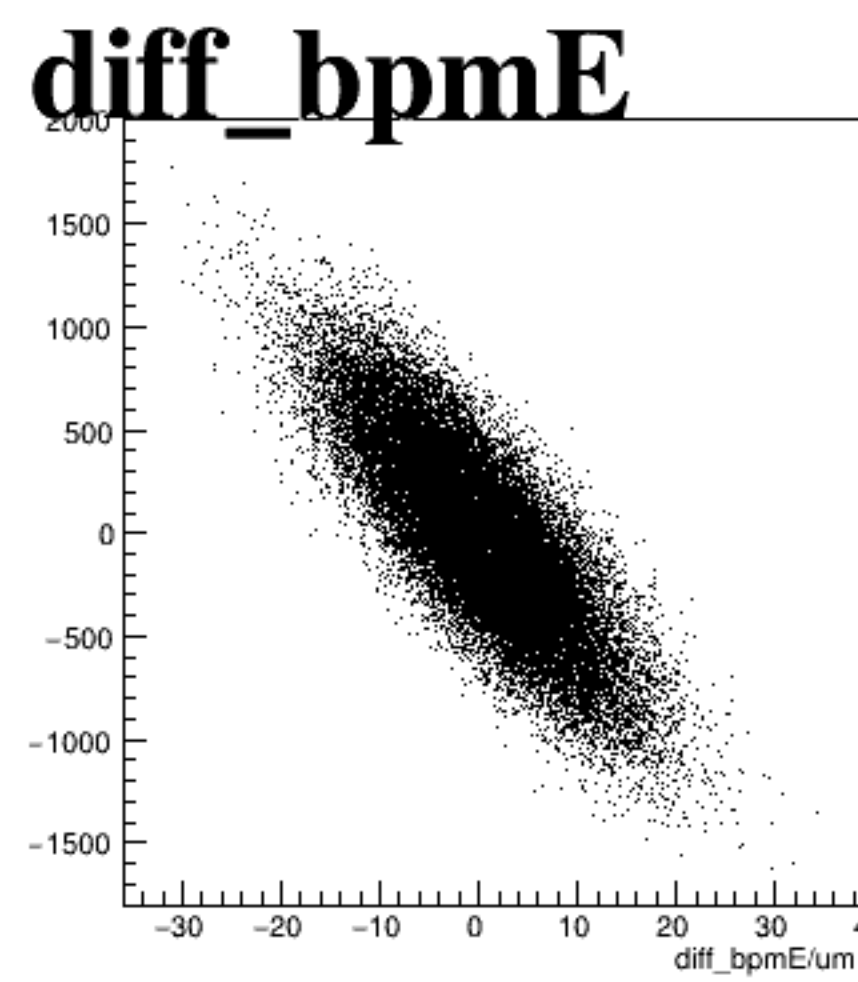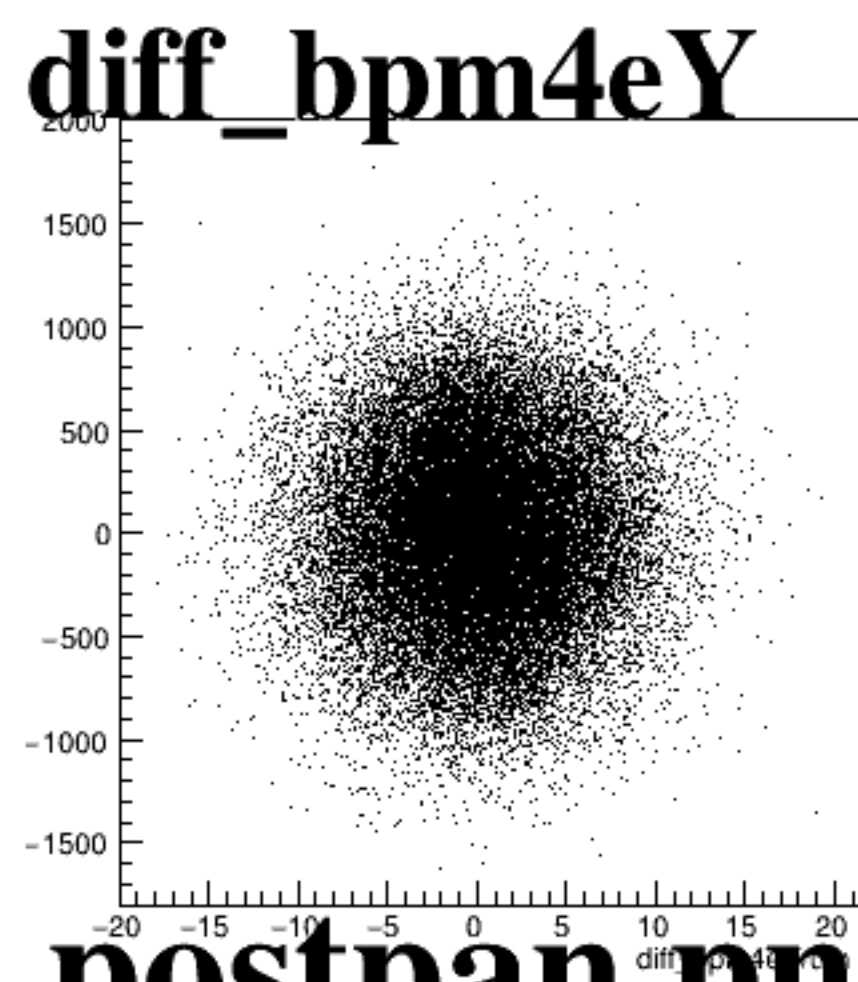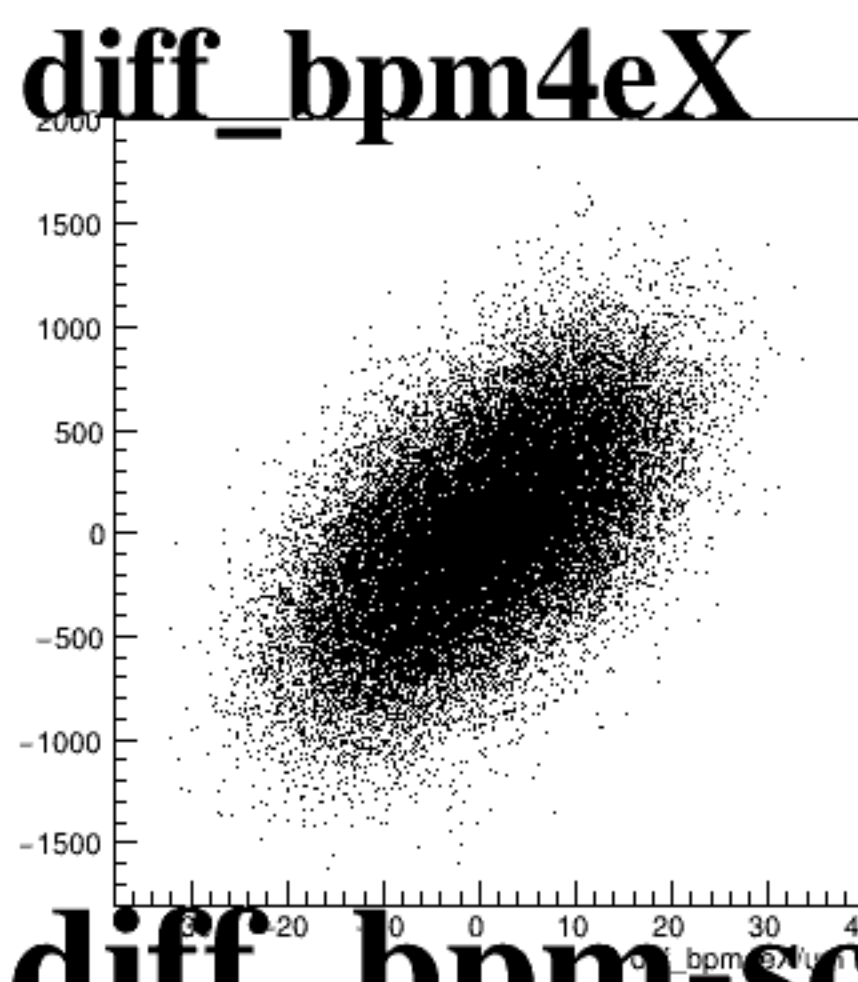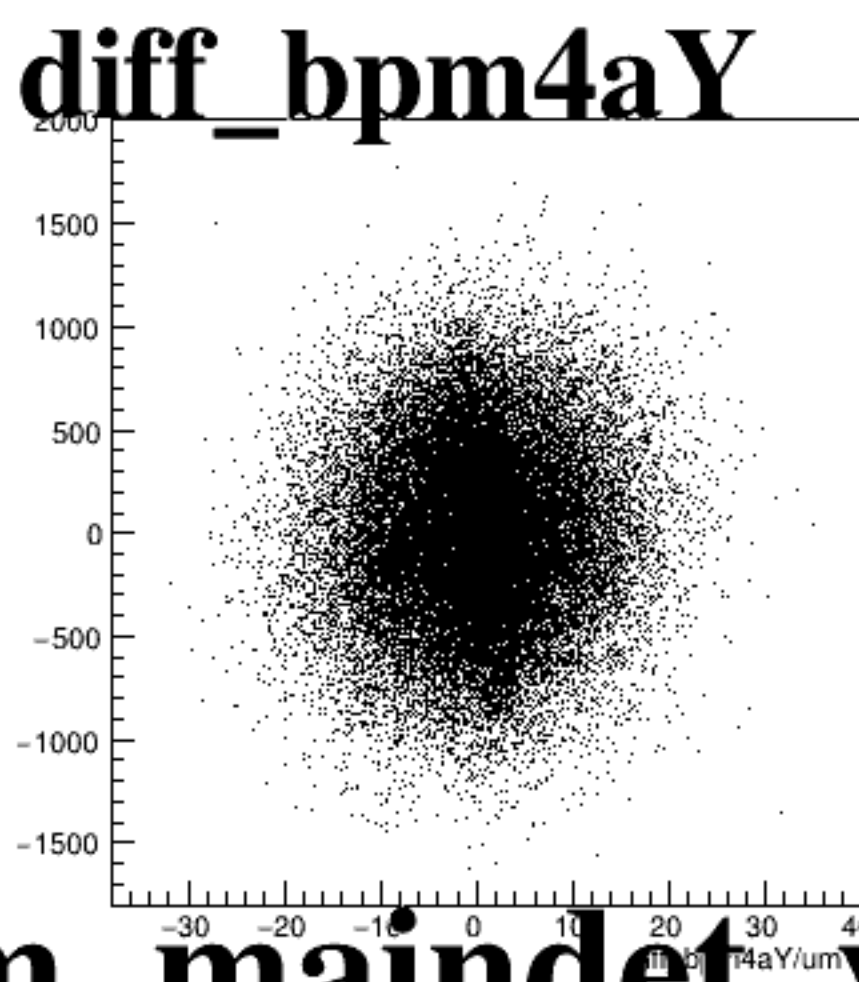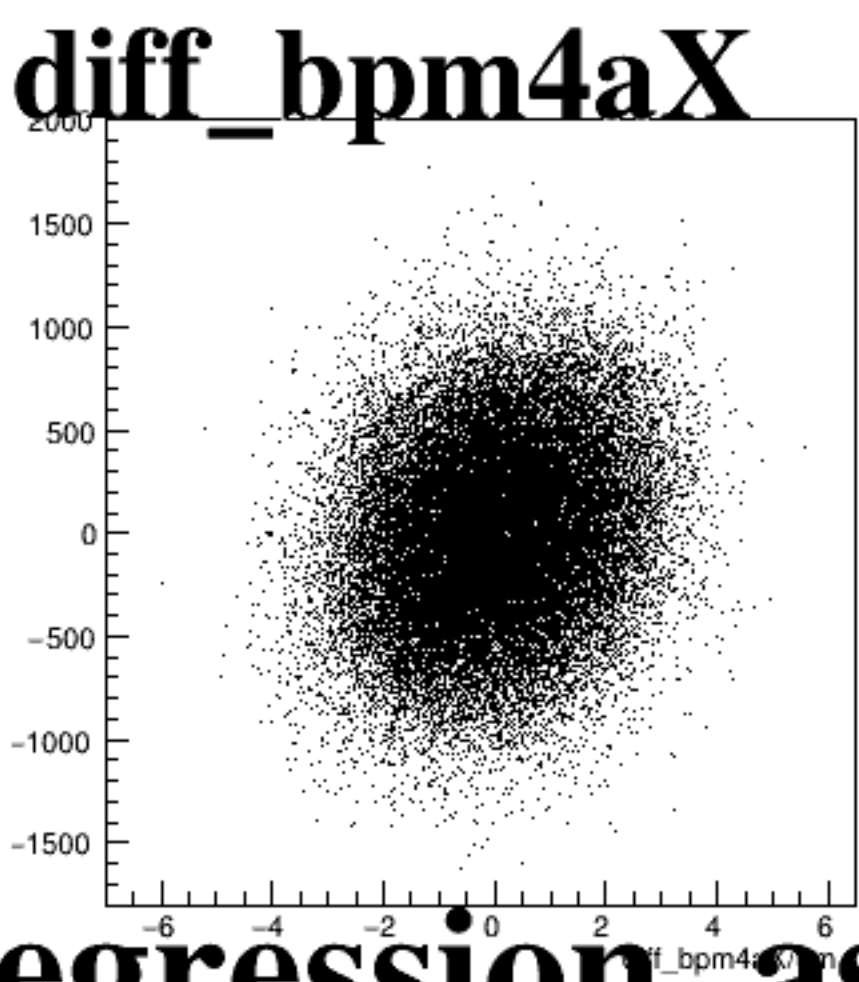

The figure consists of five scatter plots arranged horizontally, each showing the distribution of differences between different beam position monitors (BPMs). The y-axis for all plots ranges from -600 to 600. The x-axis for each plot represents the difference between two BPMs, with labels partially visible at the bottom: 'diff_bpm4aX', 'diff_bpm4aY', 'diff_bpm4eX', 'diff_bpm4eY', and 'diff_bpmE'. The plots show a dense, roughly circular cloud of points centered around zero difference, indicating that the measurements from the different BPMs are highly consistent.