




asym_usl

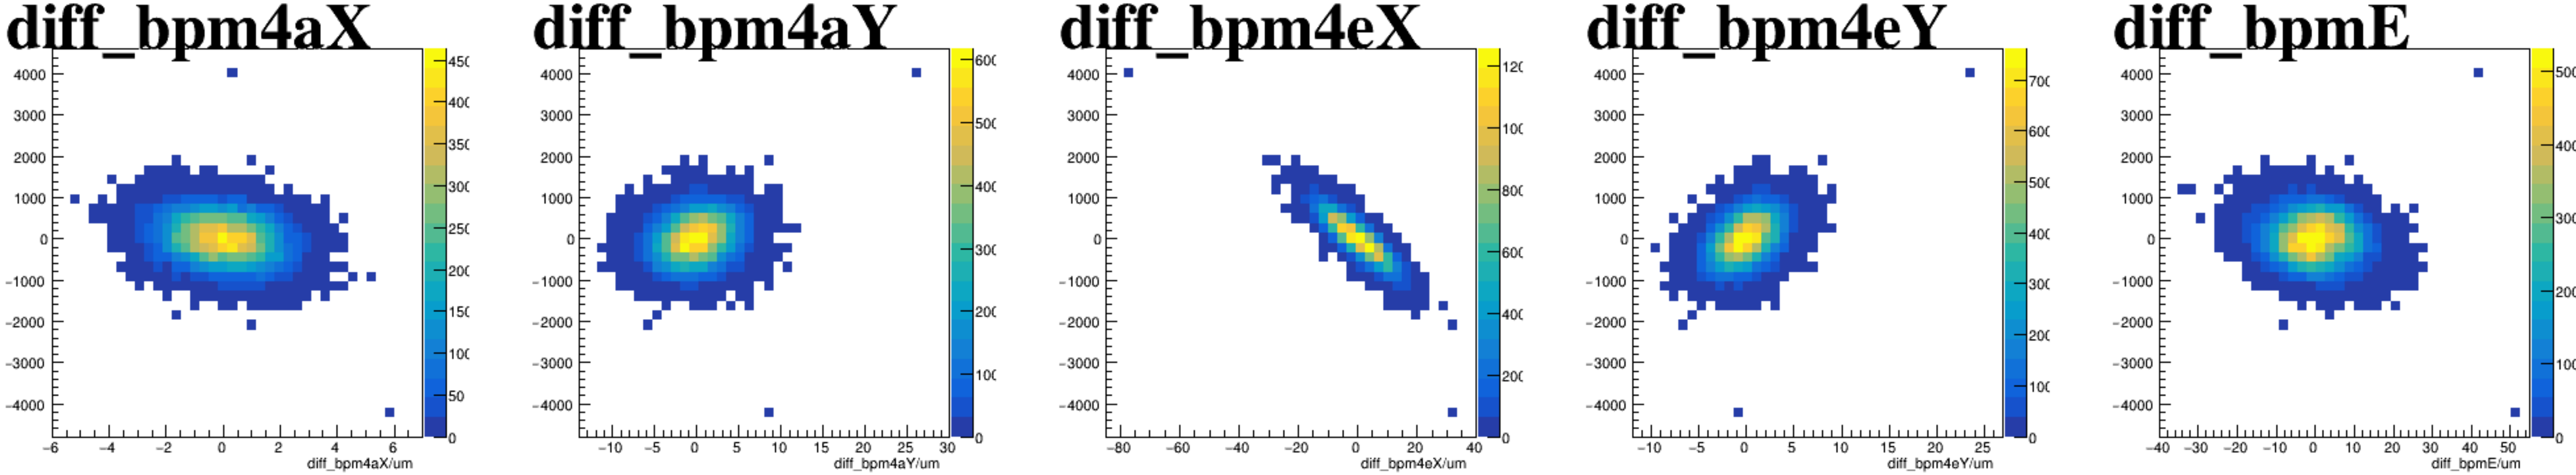


asym_dsl

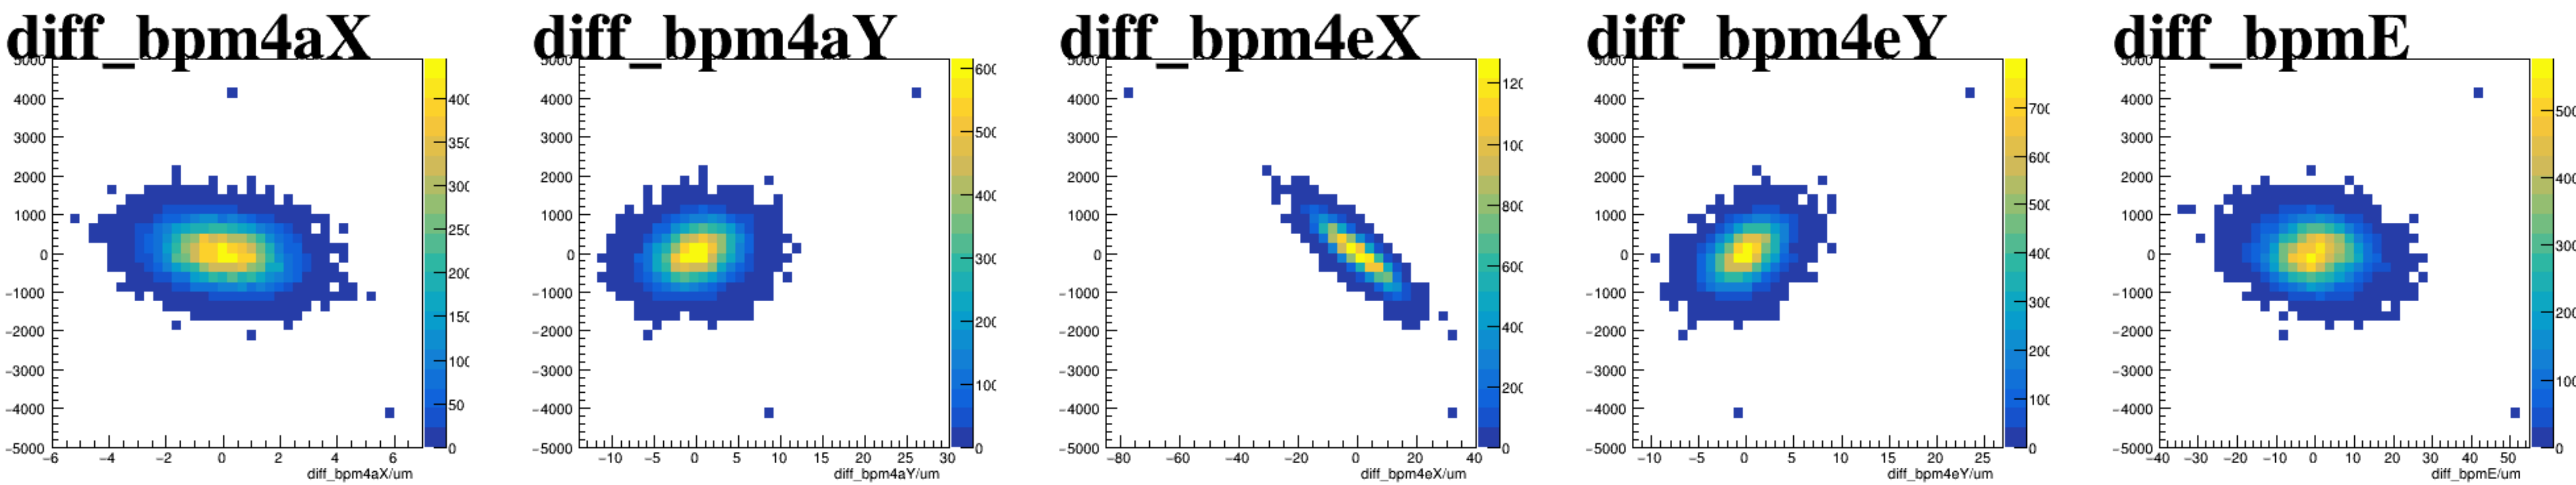


asym_usr

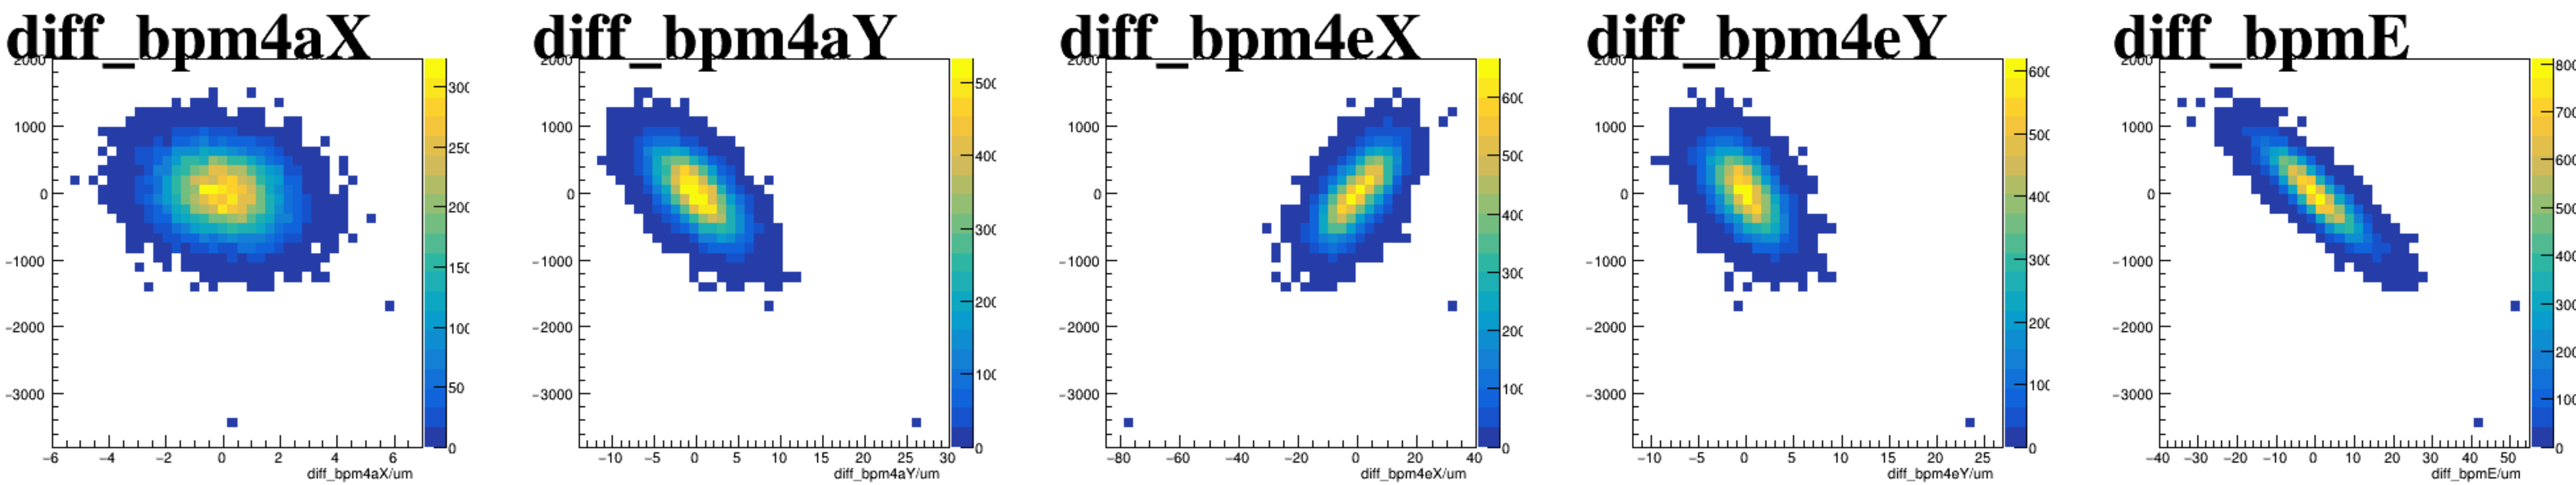


asym_dsr

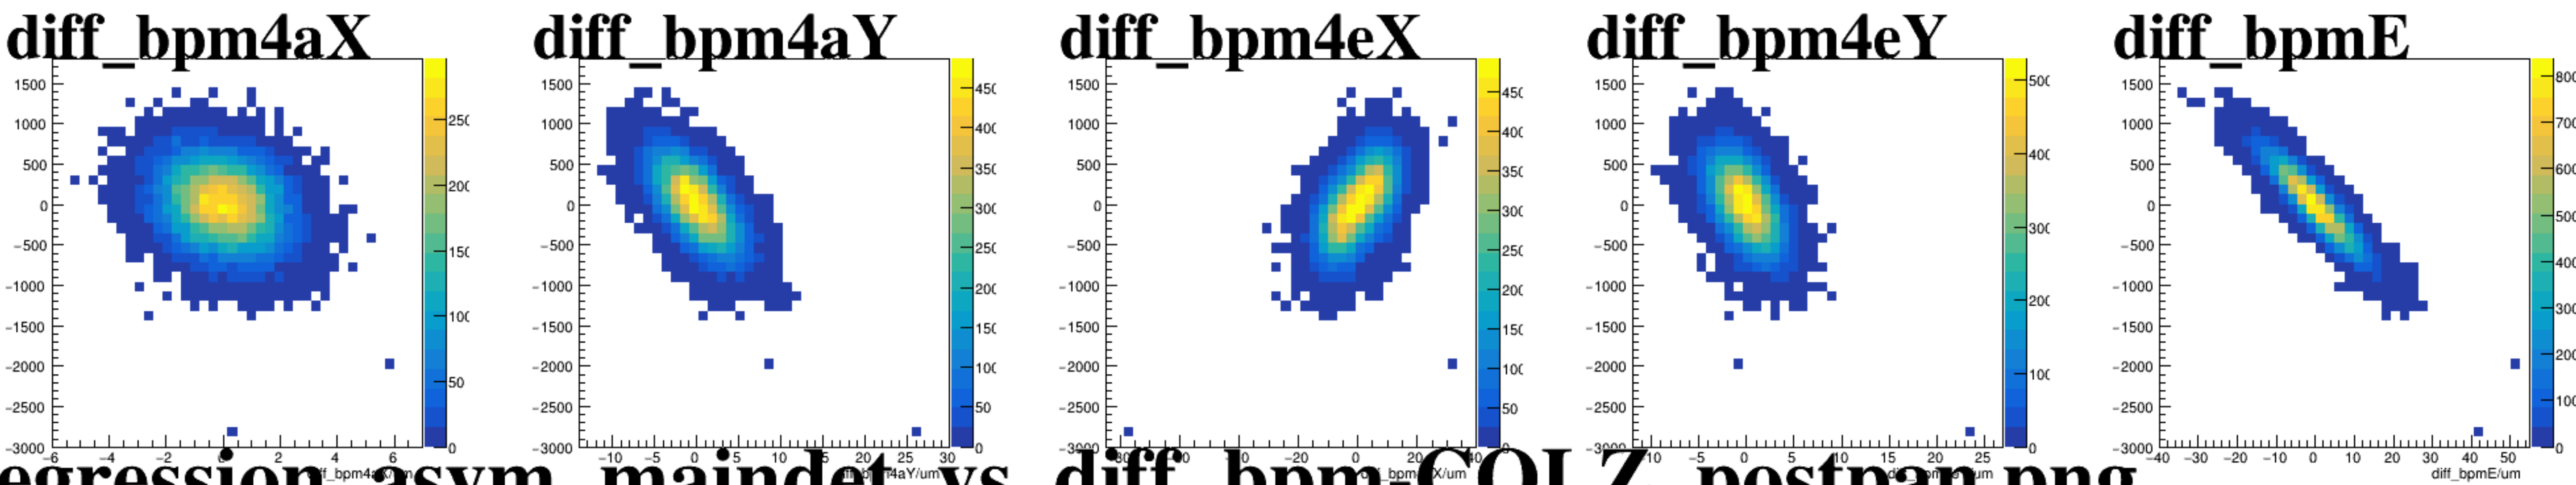


reg_asym_usl

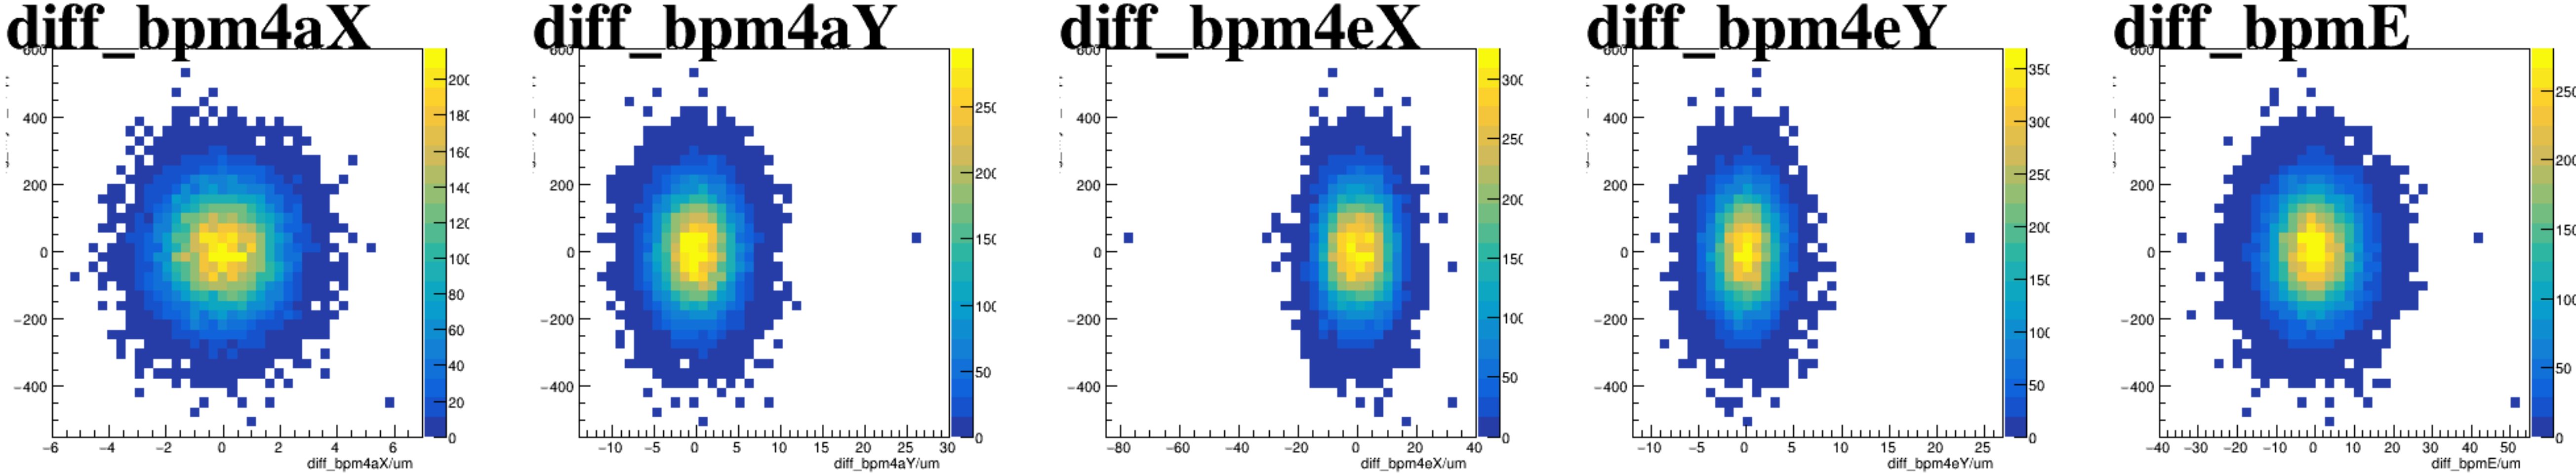


reg_asym_dsl

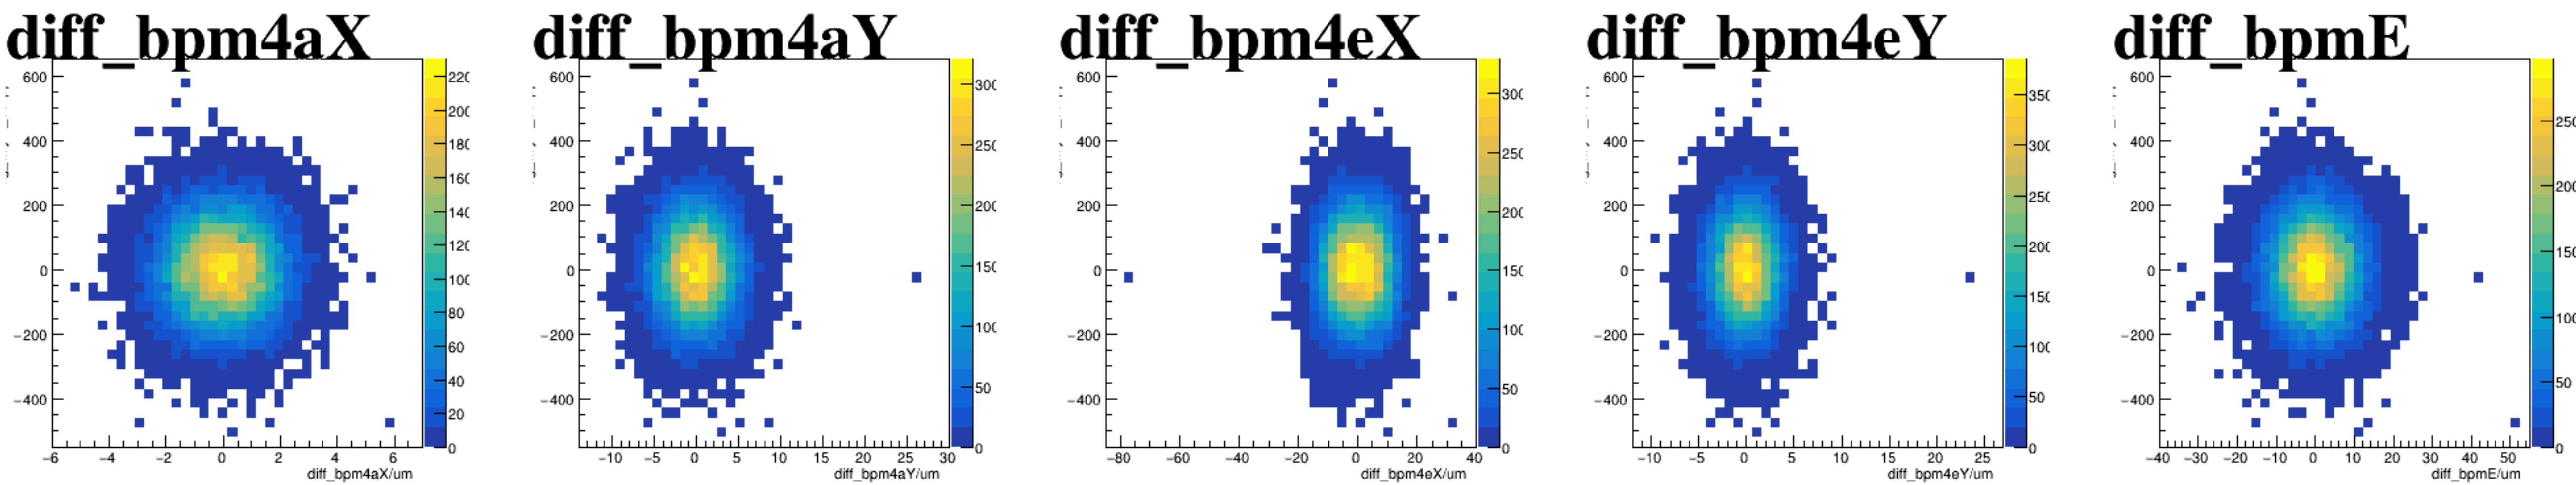






reg_asym_usr

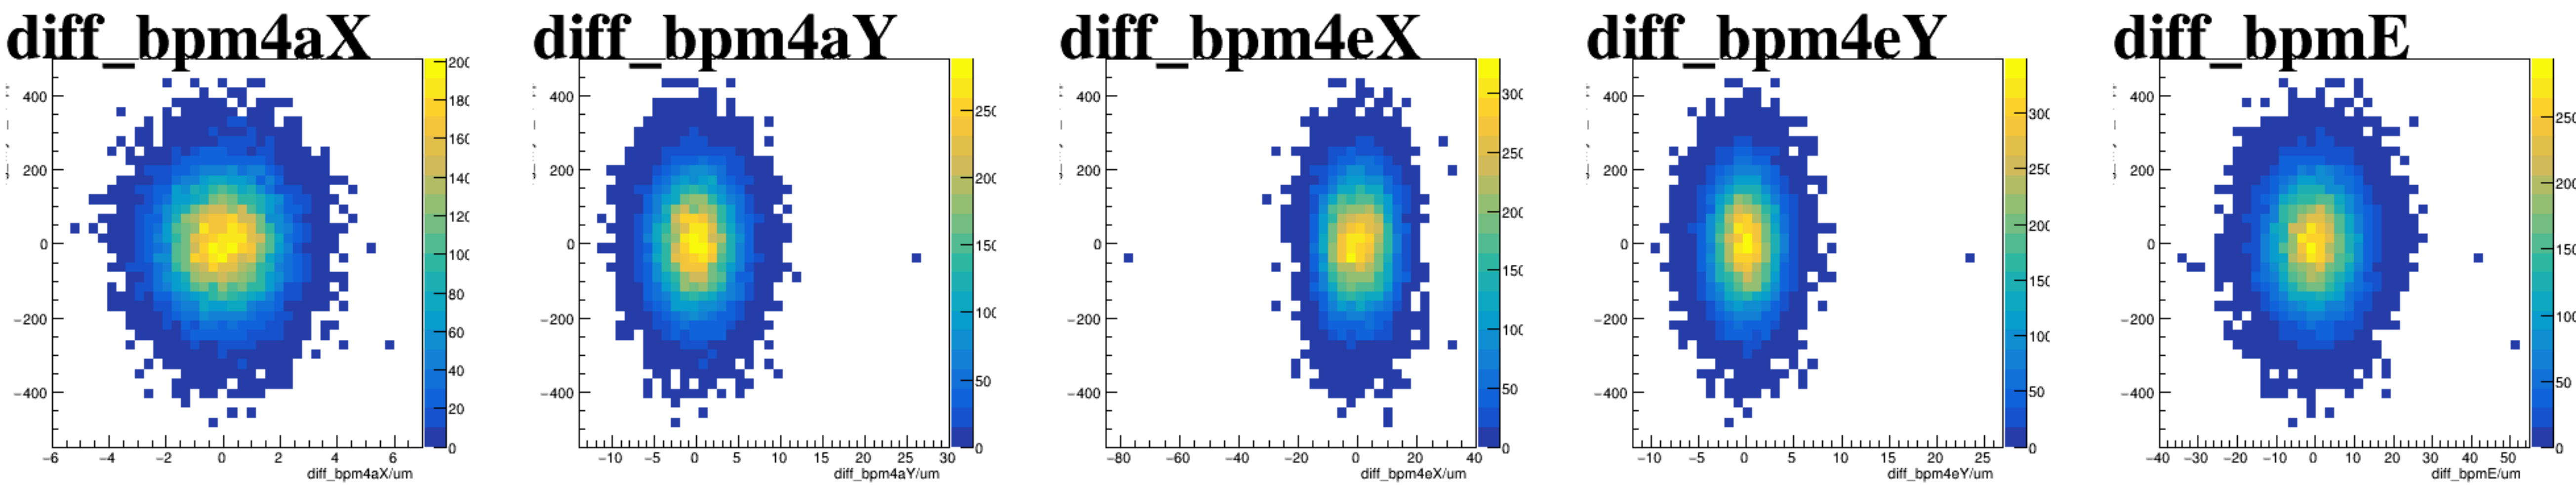






reg_asym_dsr

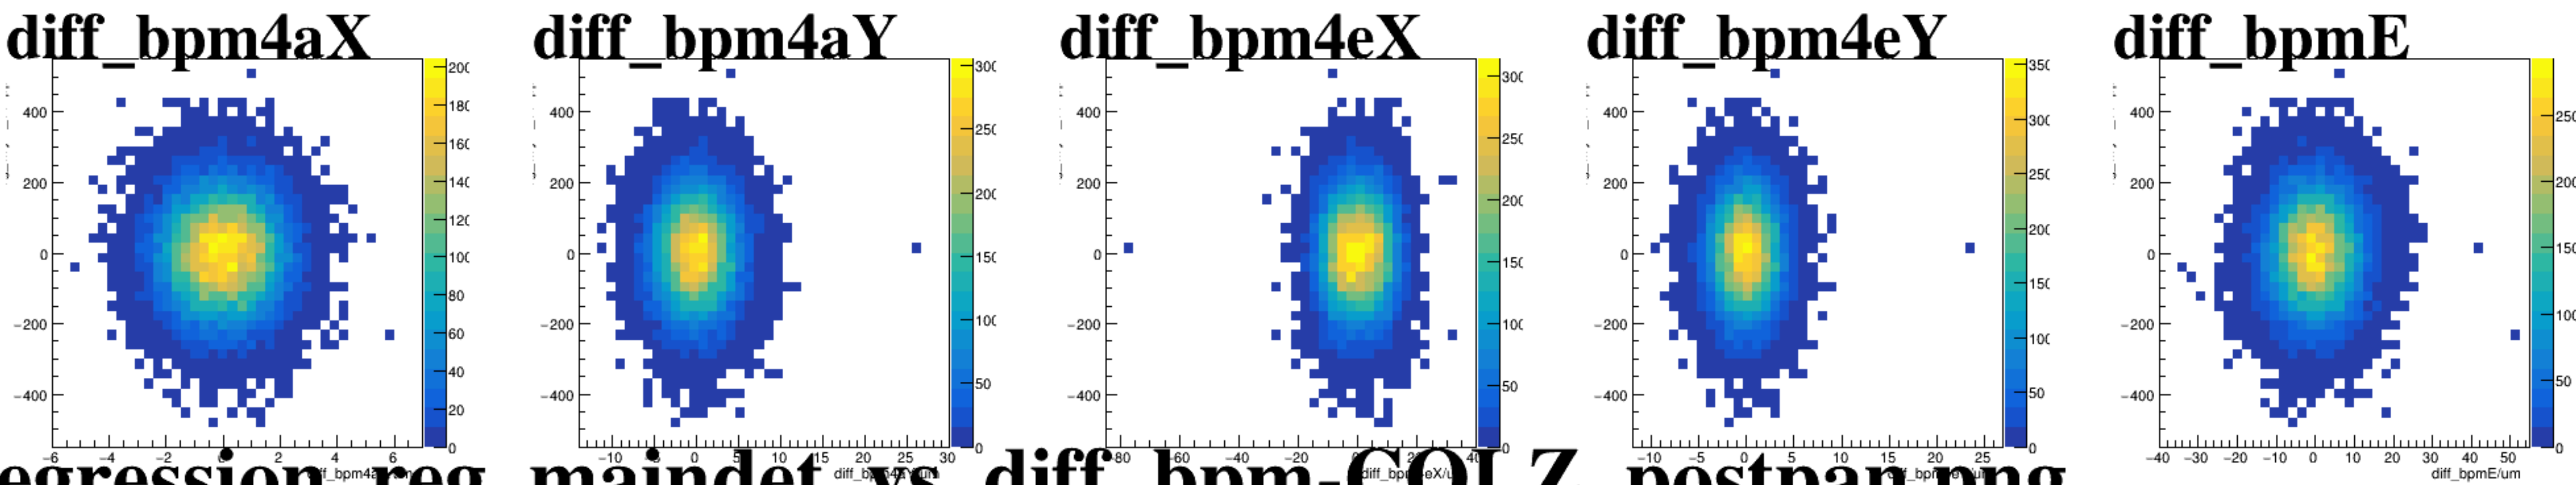






asym_usl

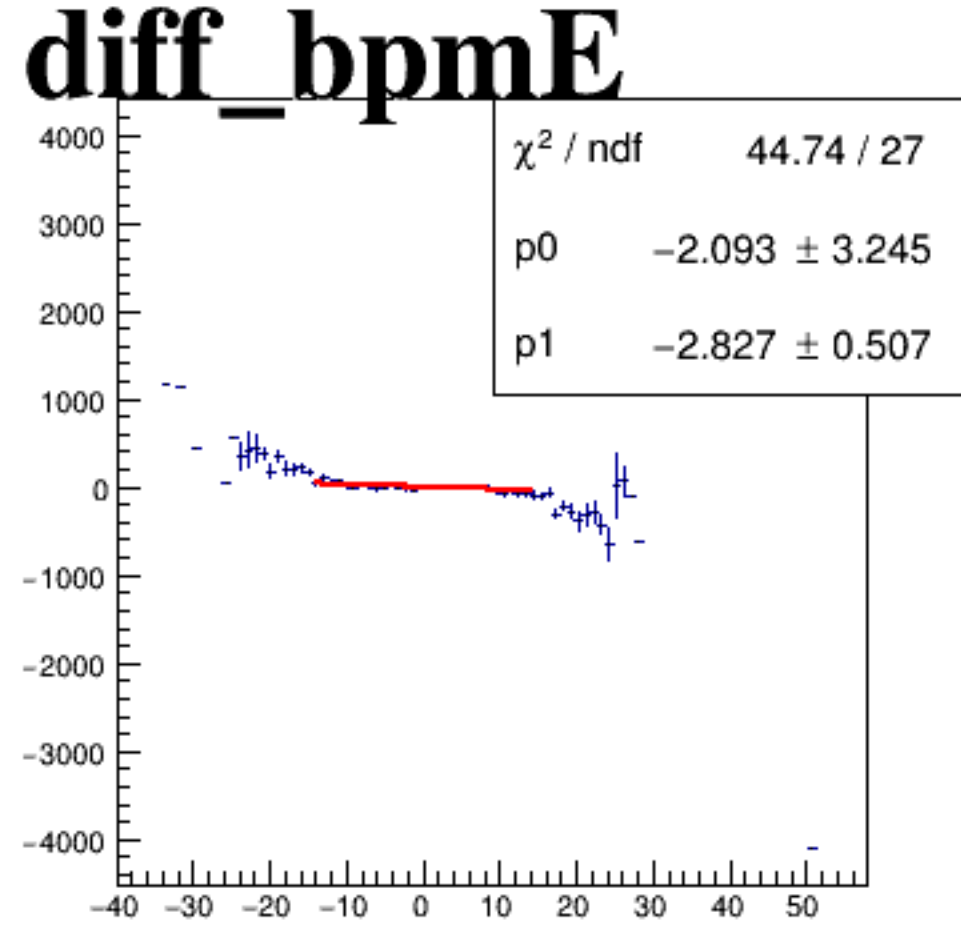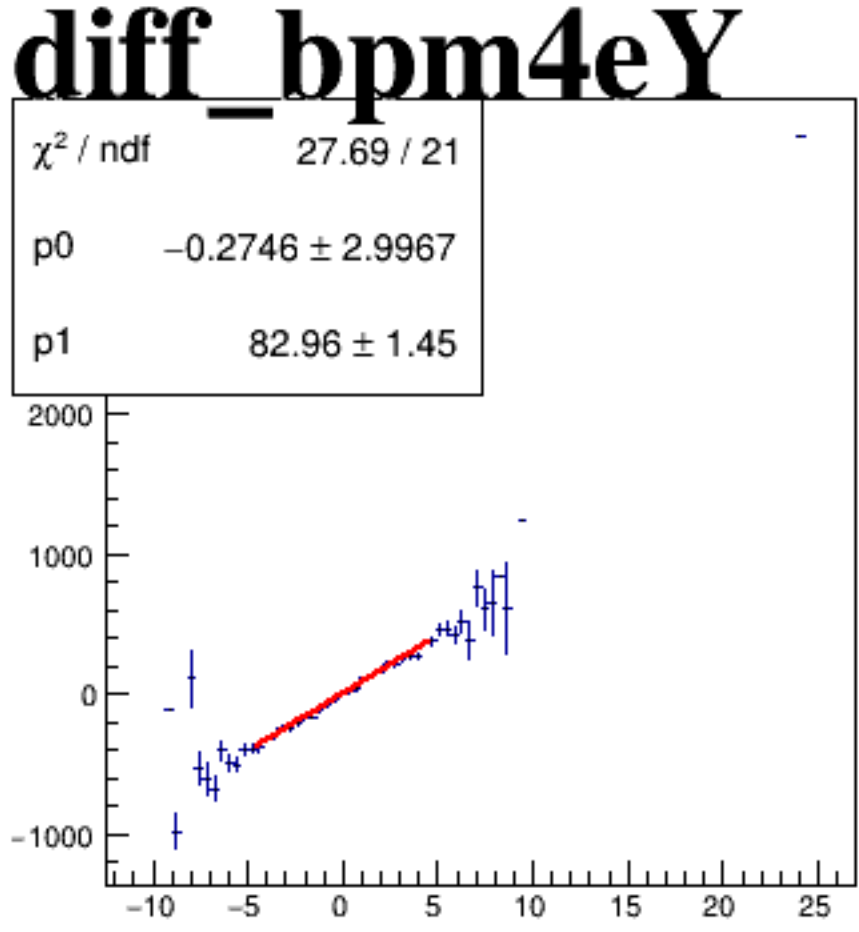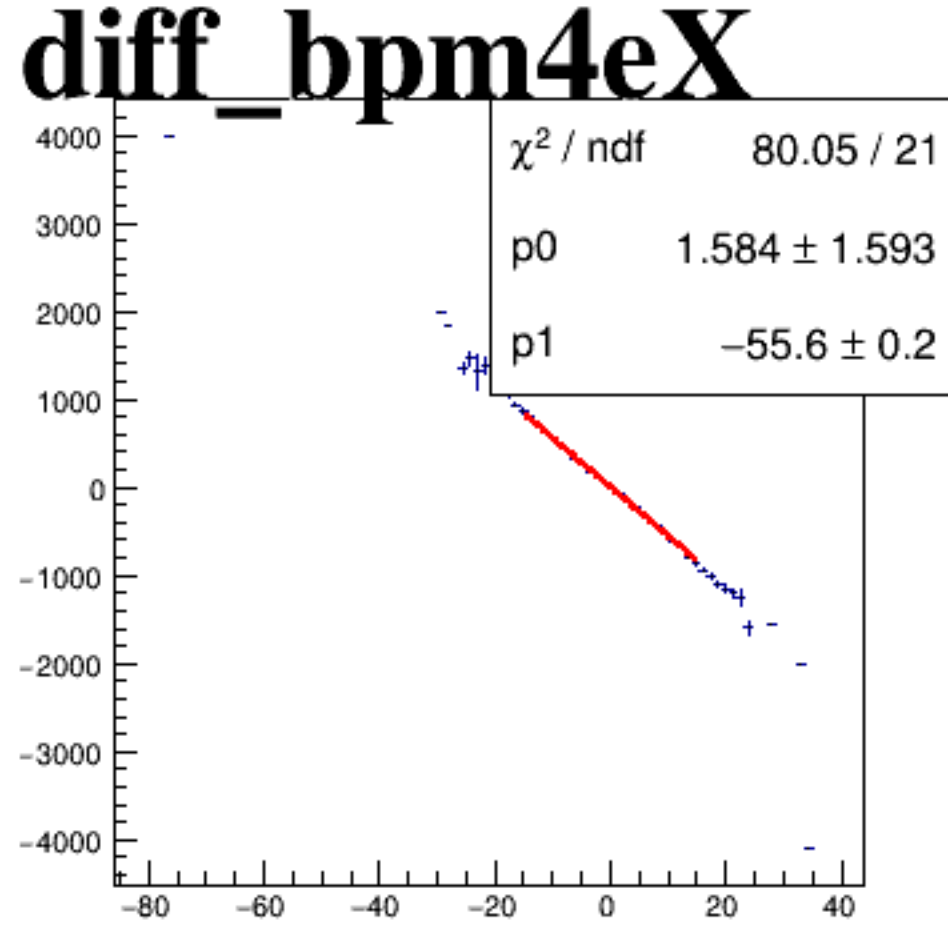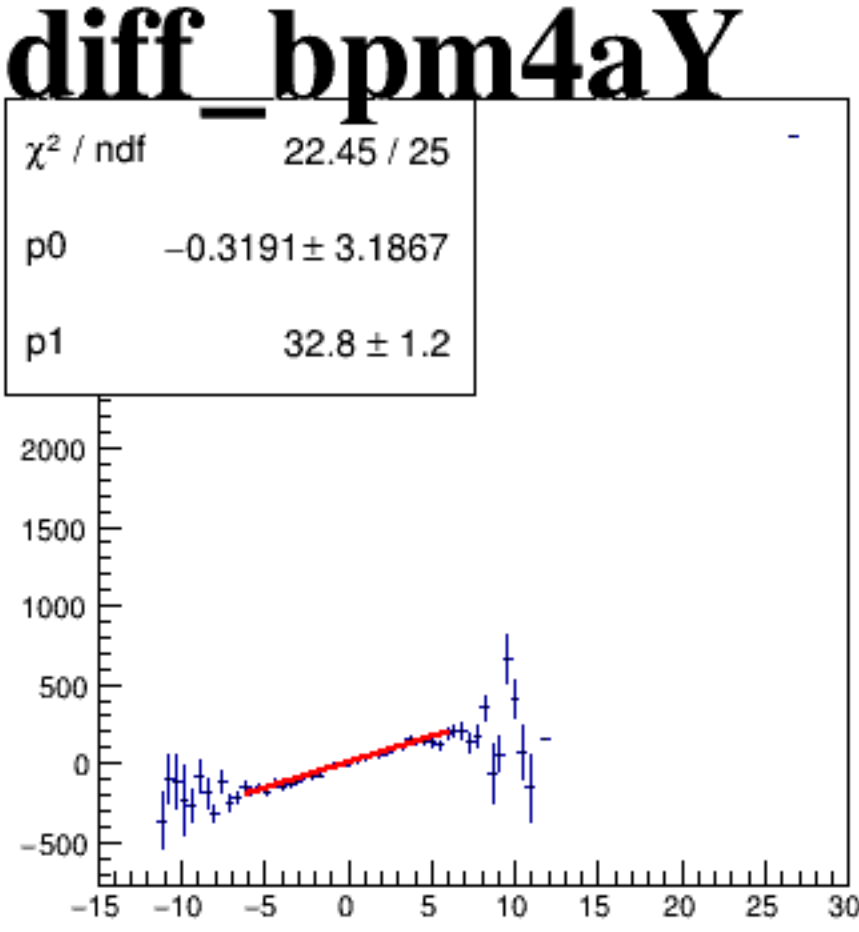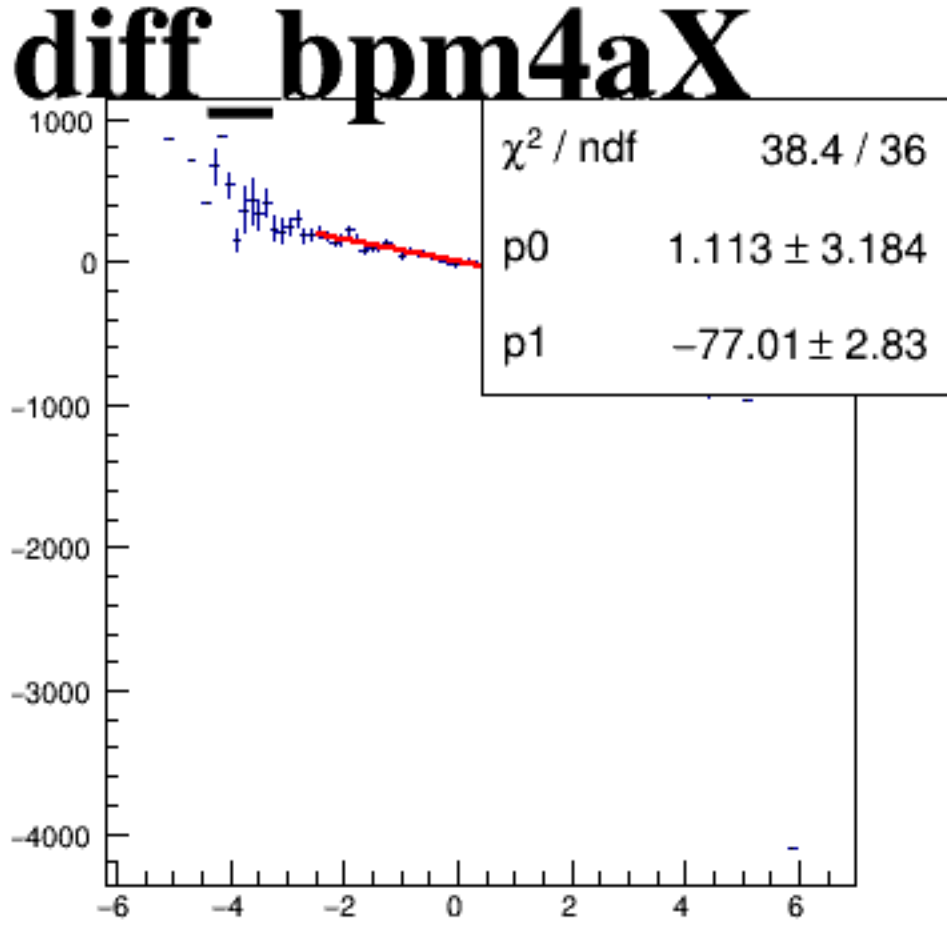






asym_dsl

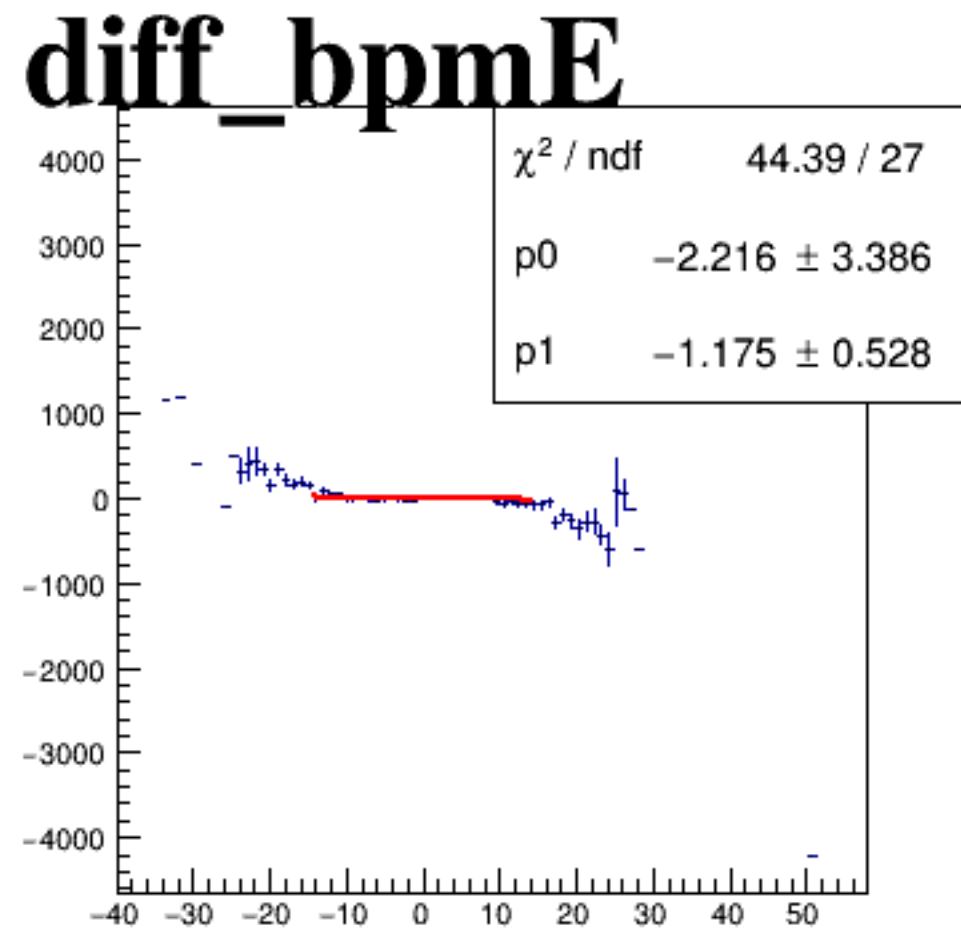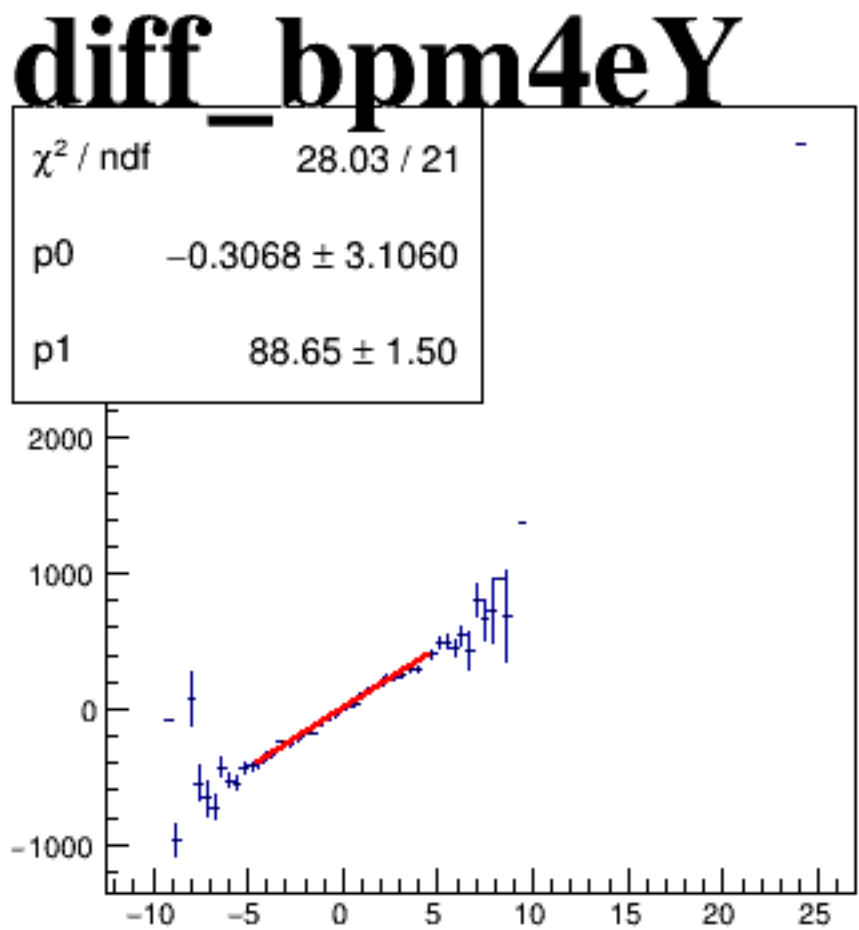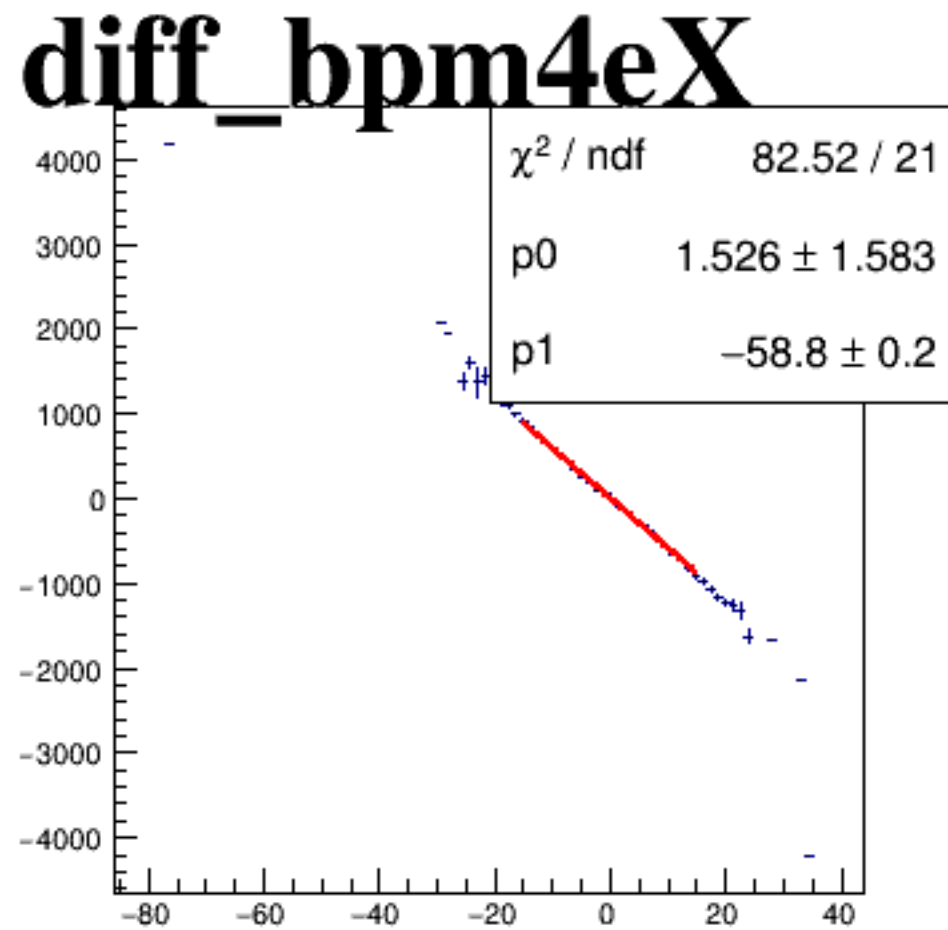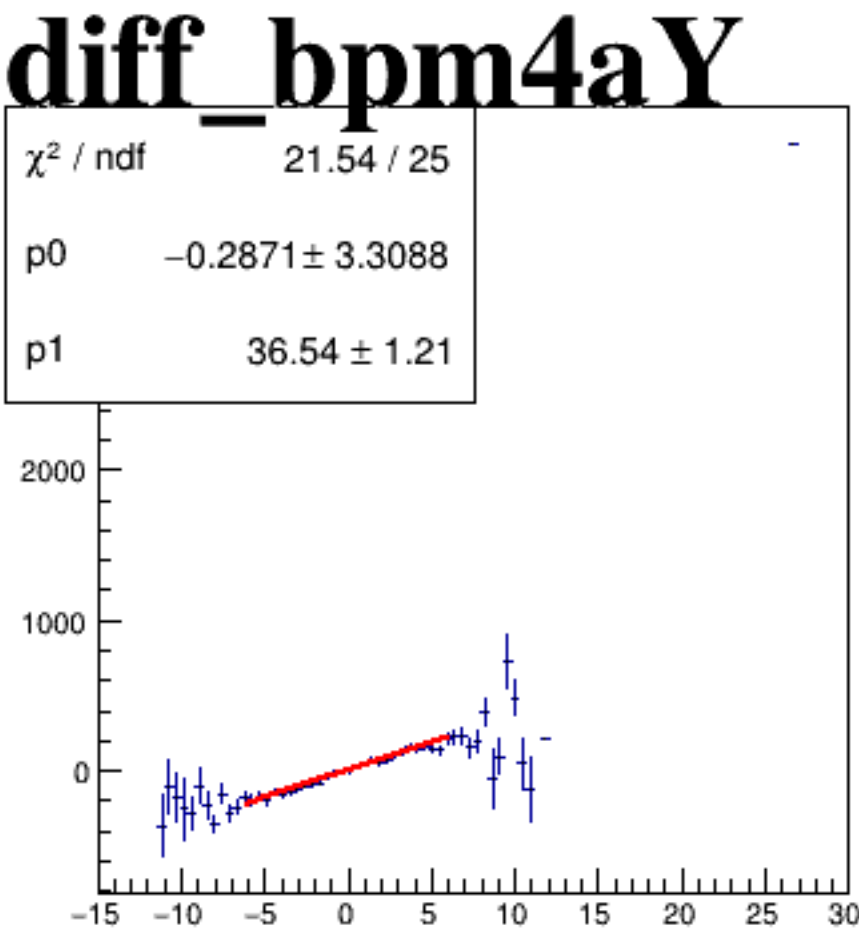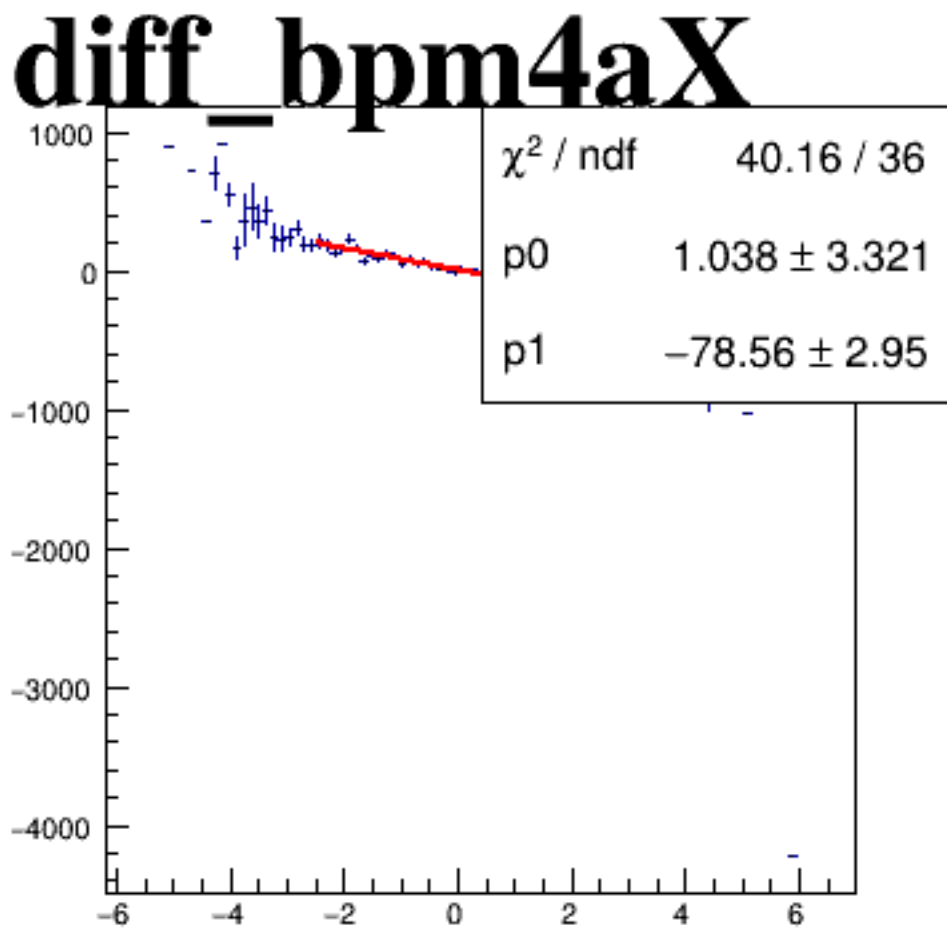






asym_usr

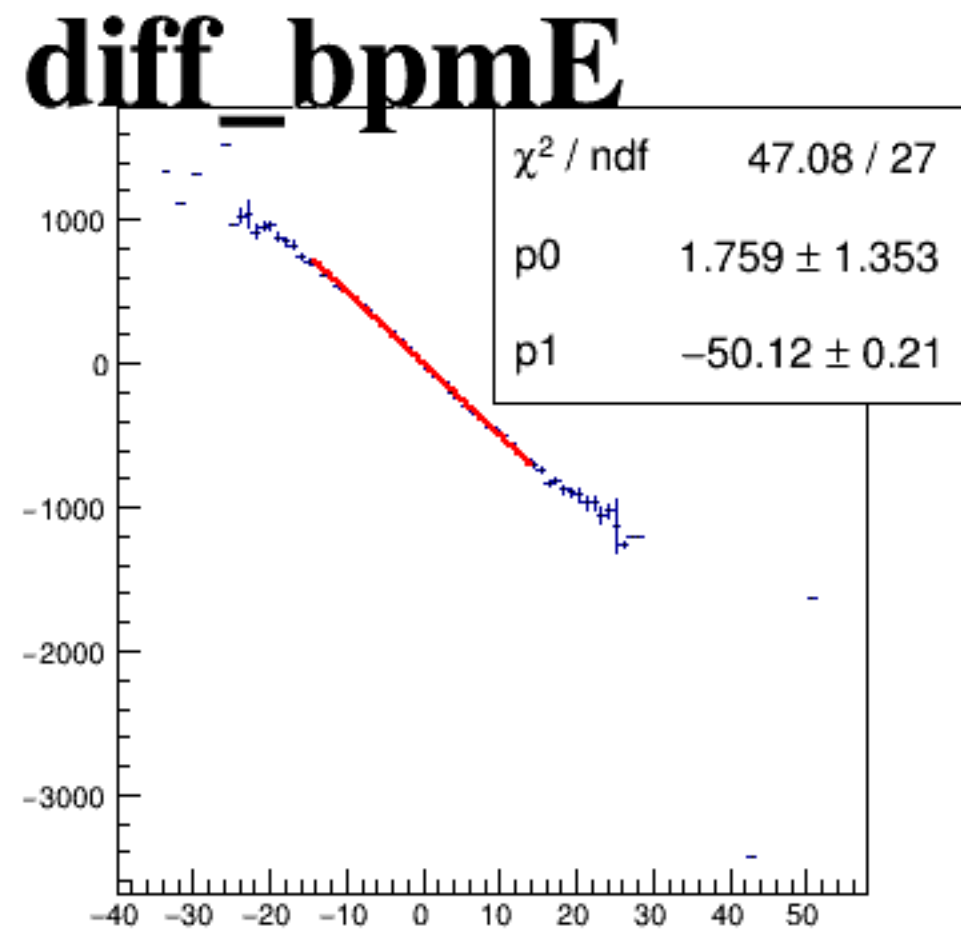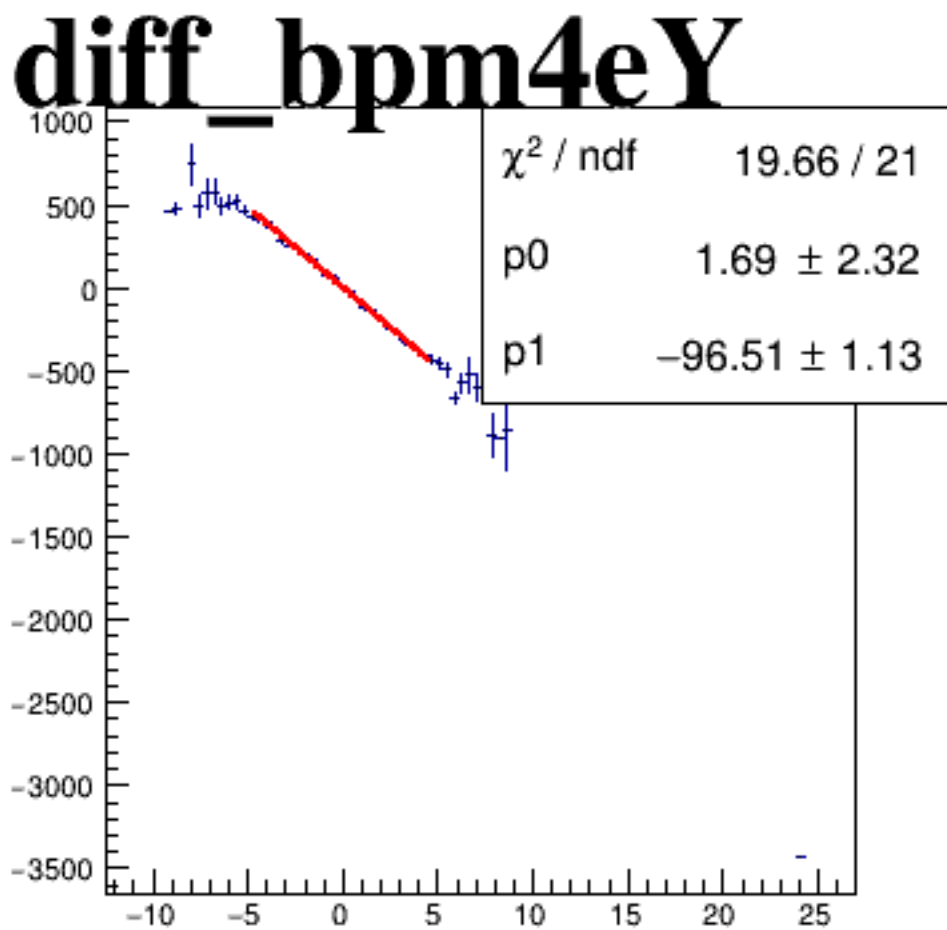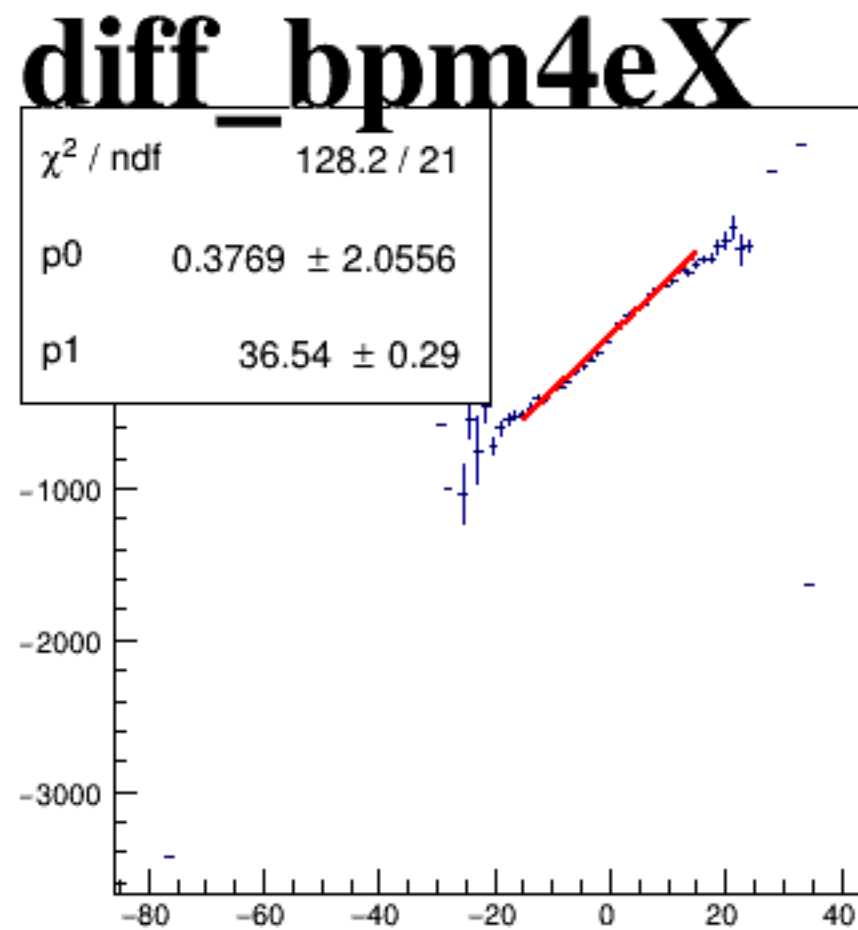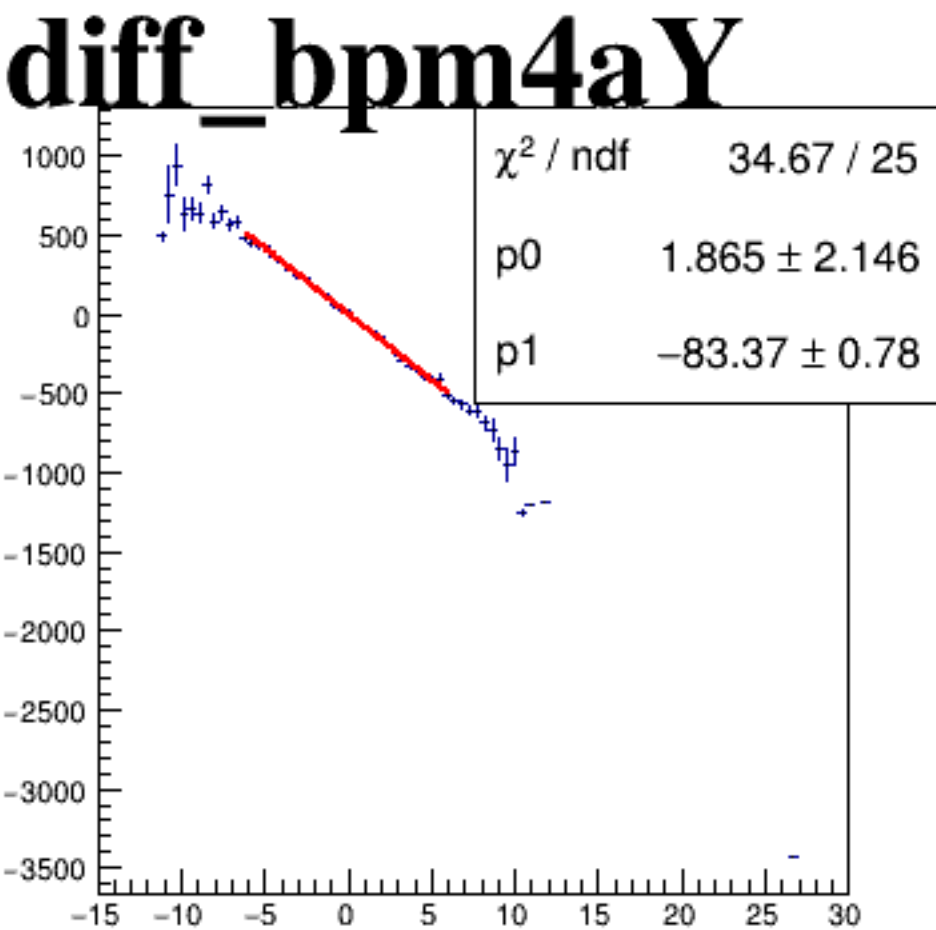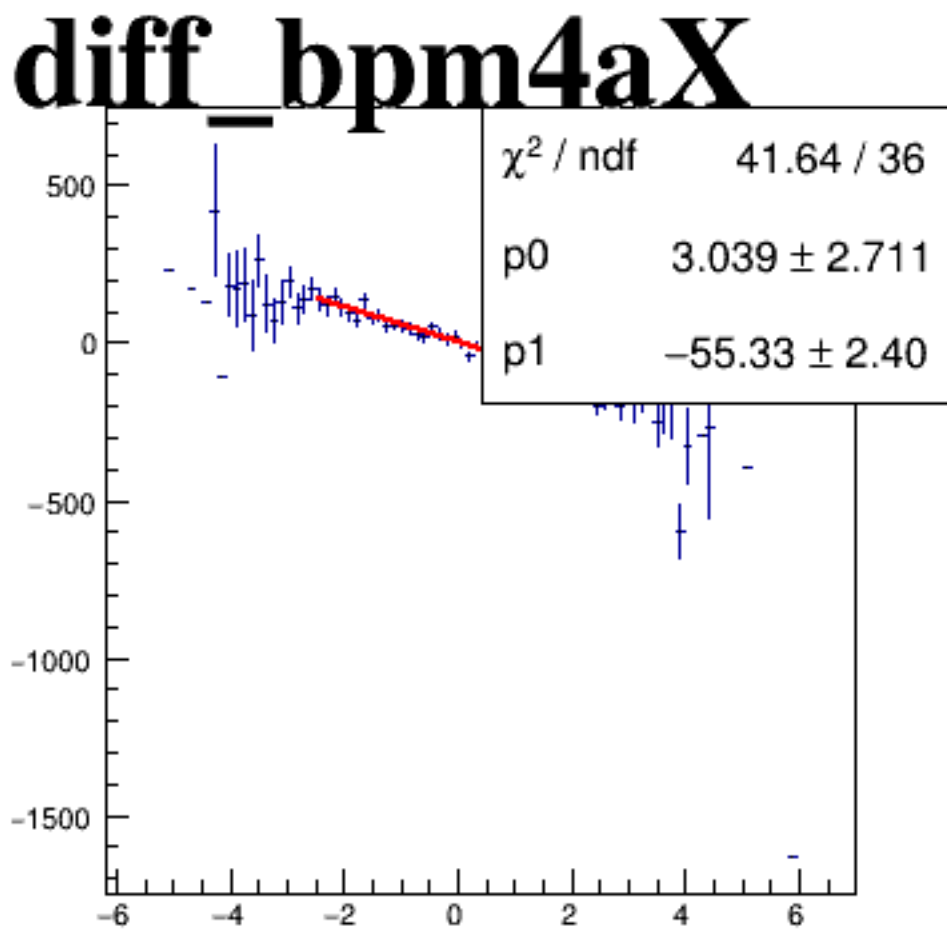






asym_dsr

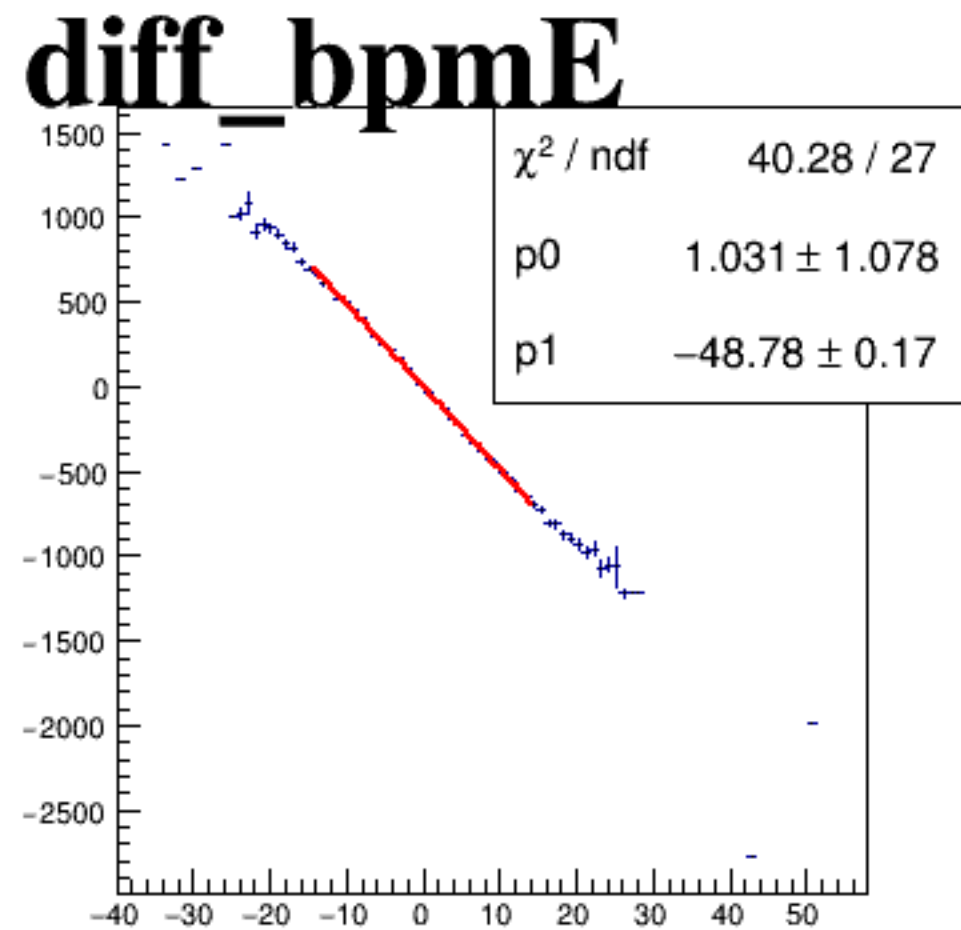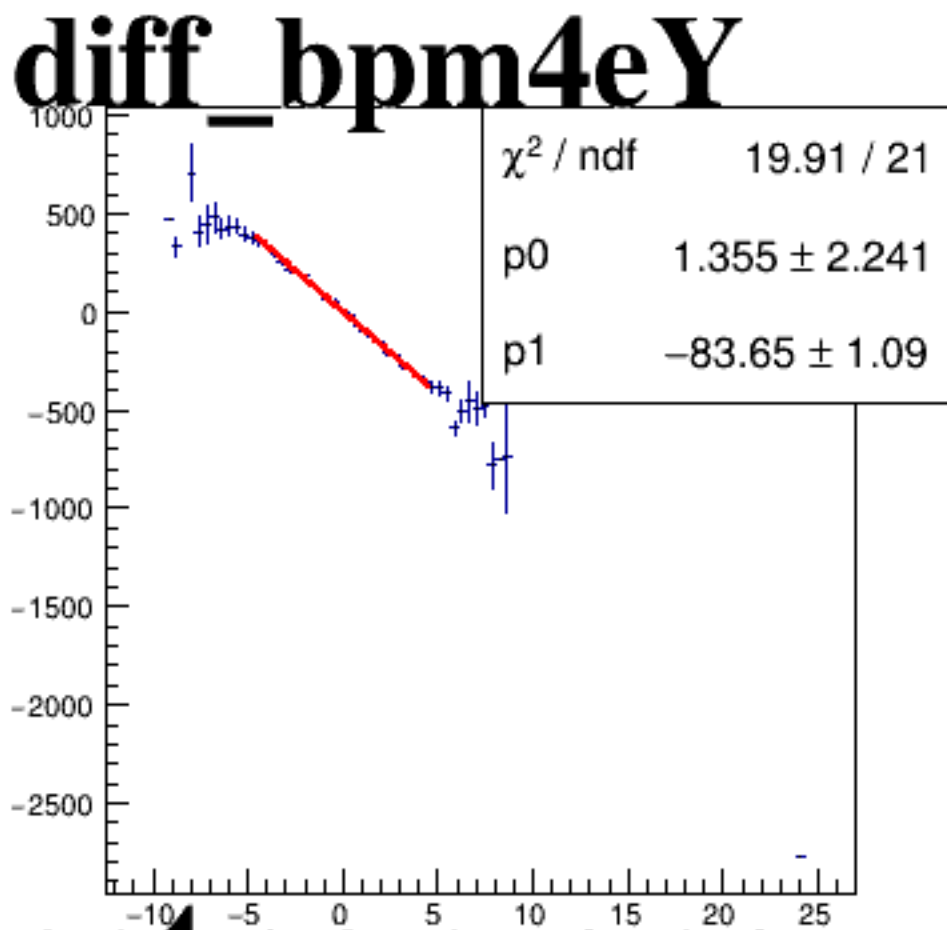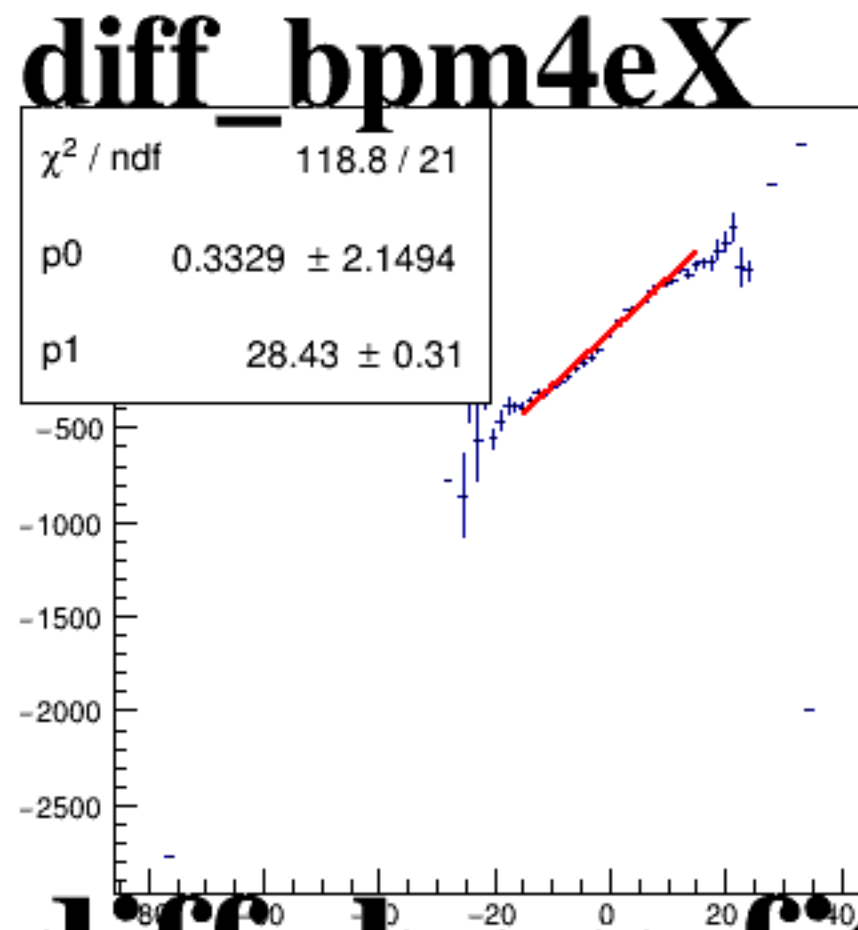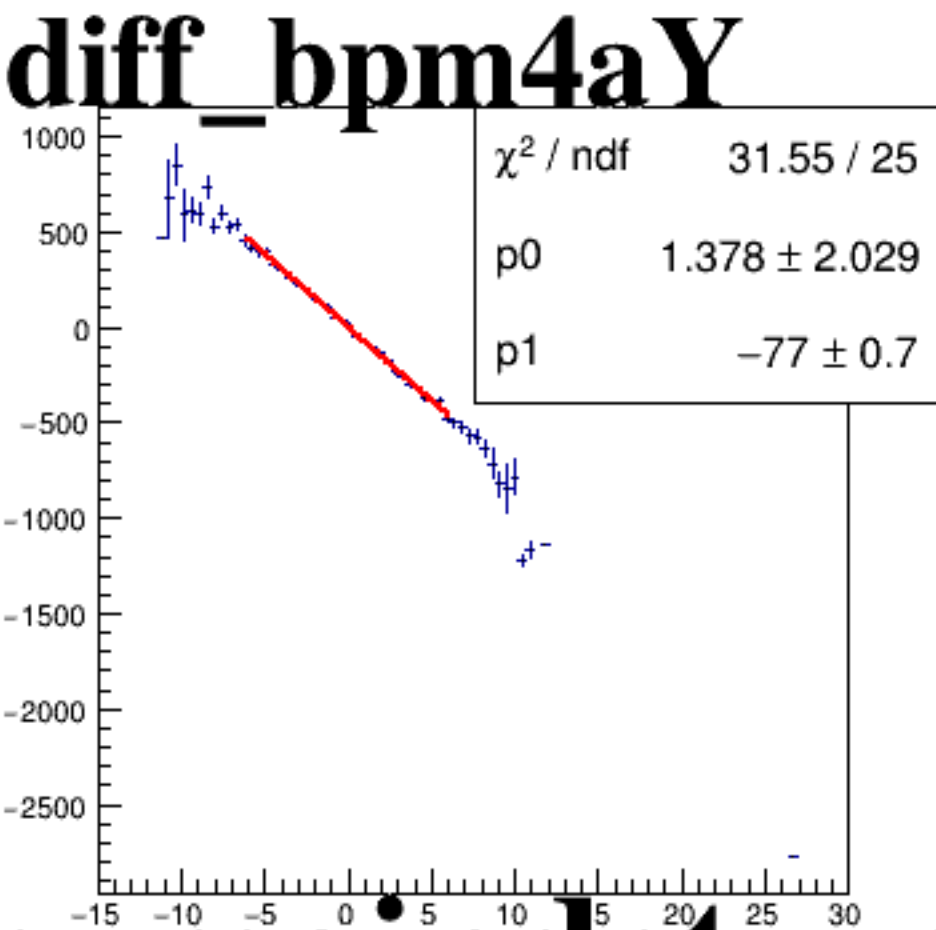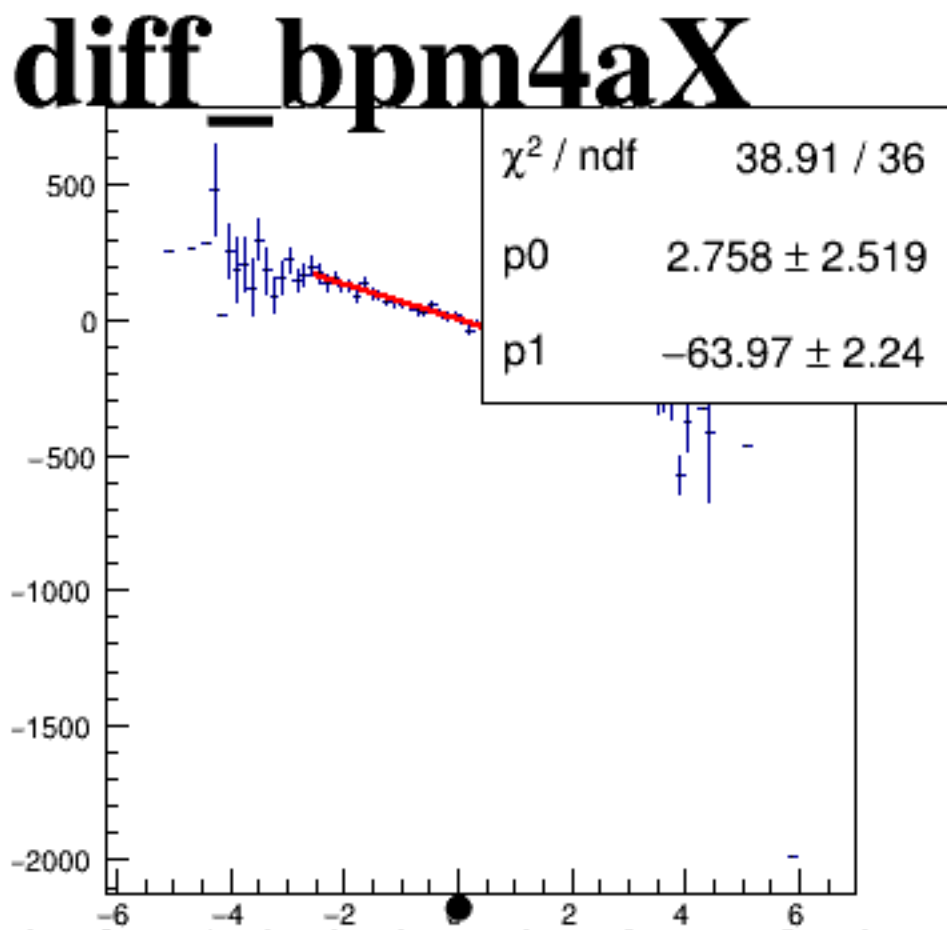






reg_asym_usl

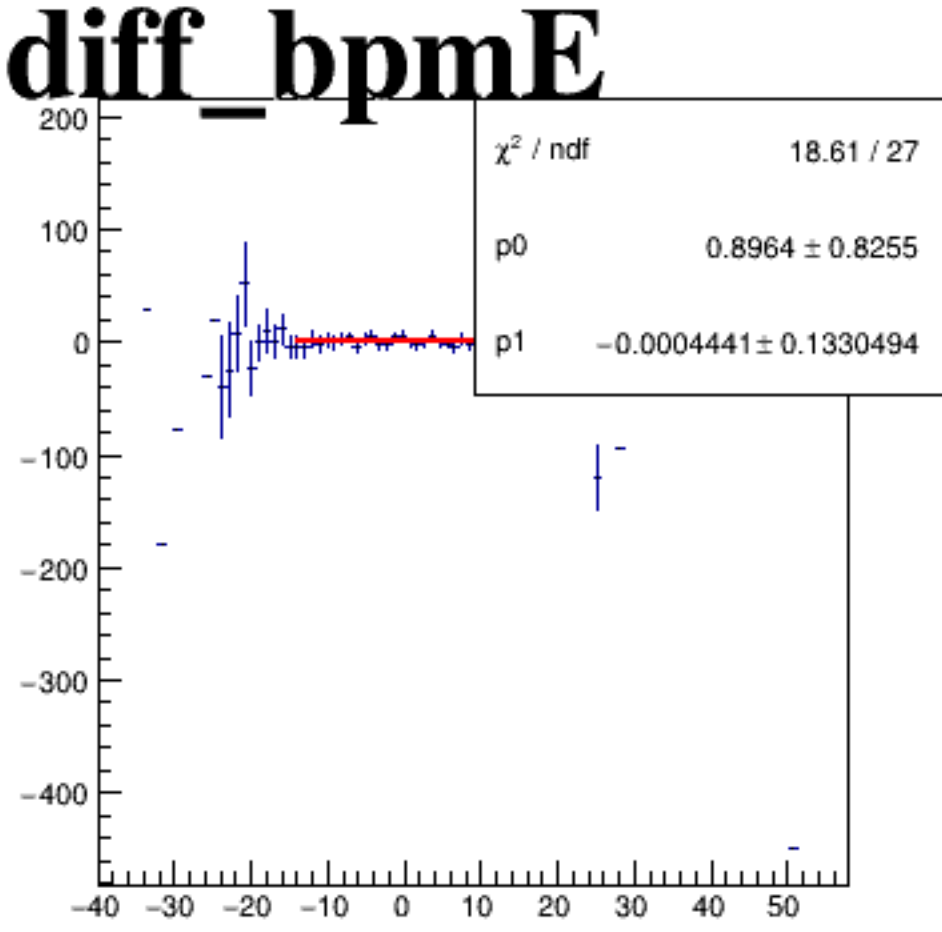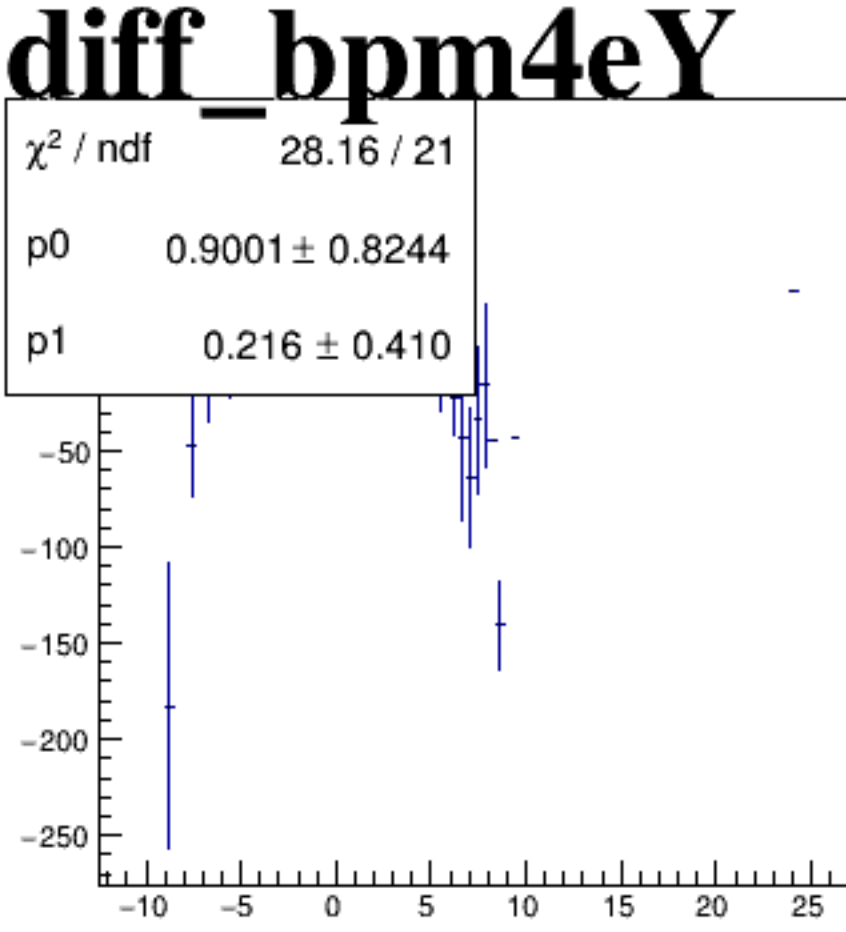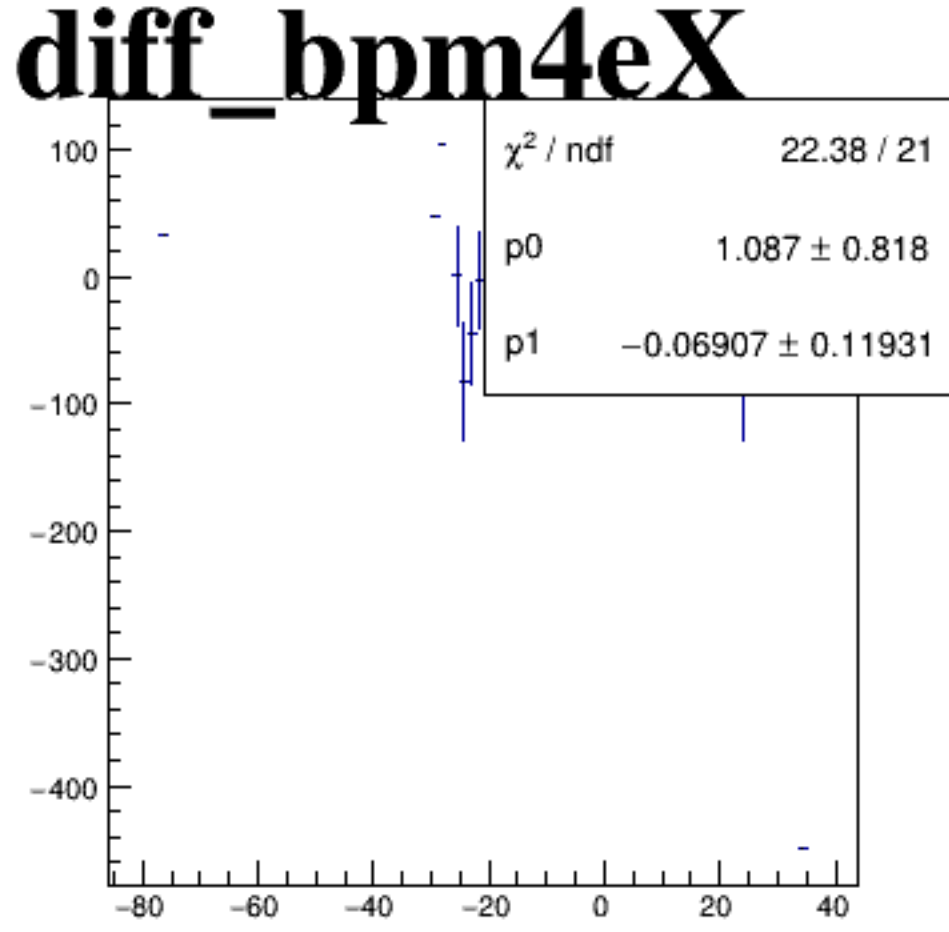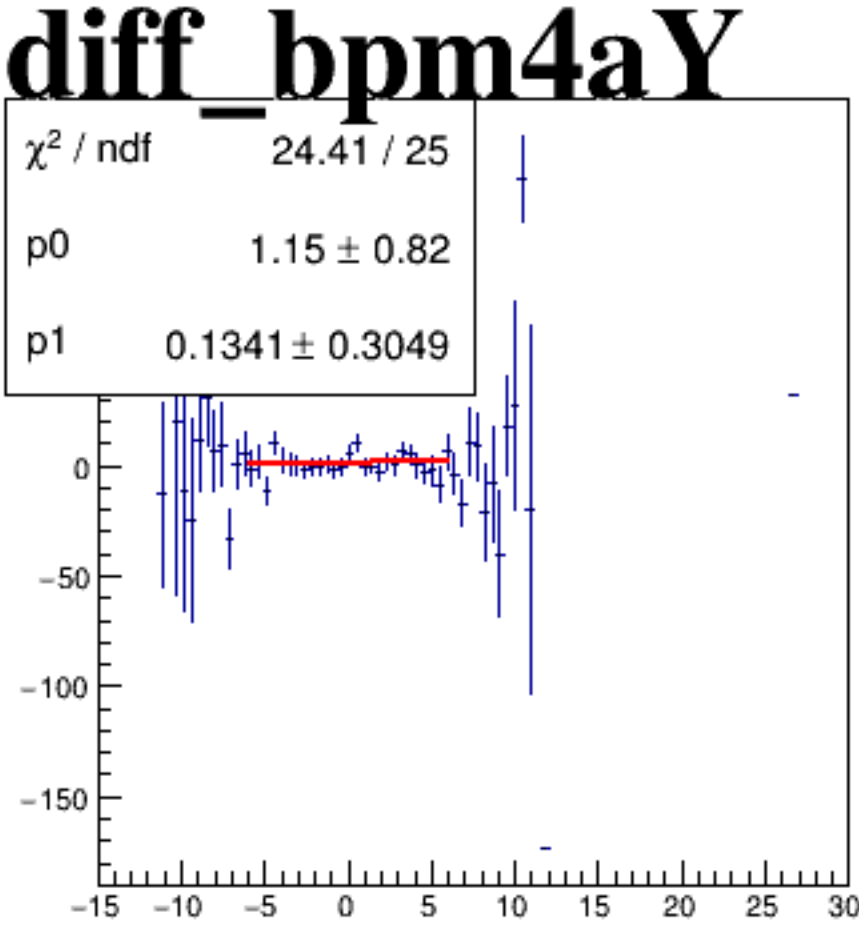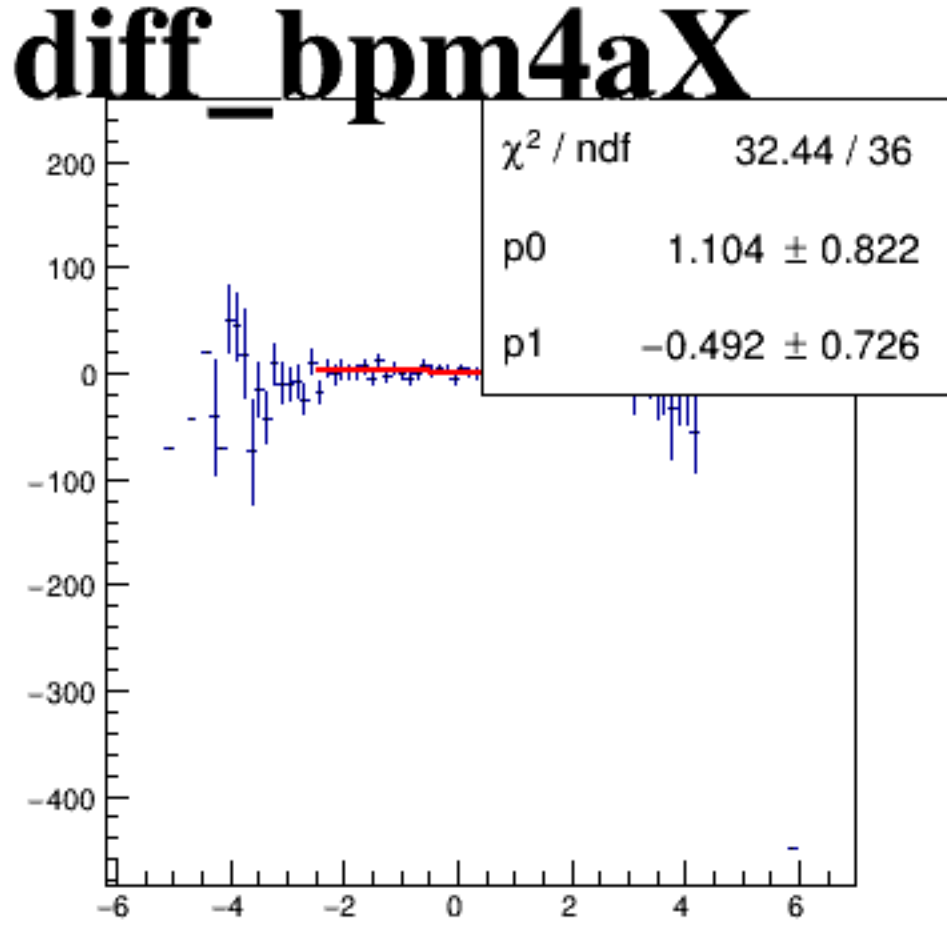






reg_asym_dsl

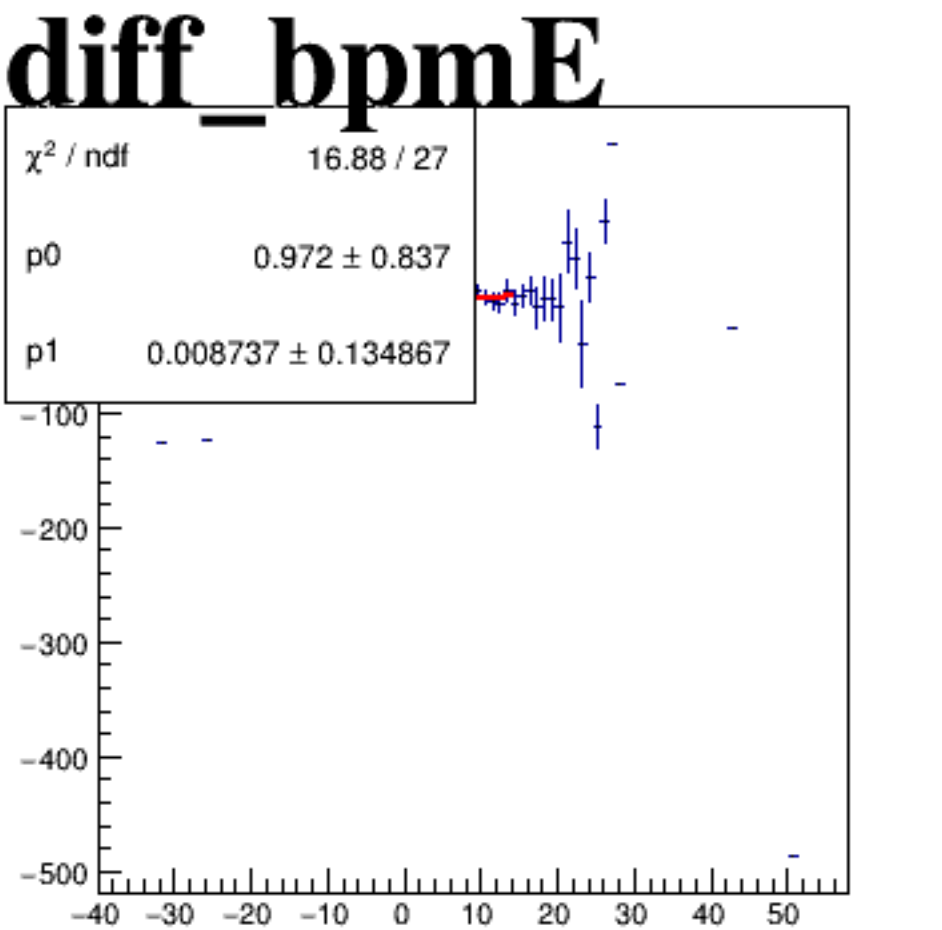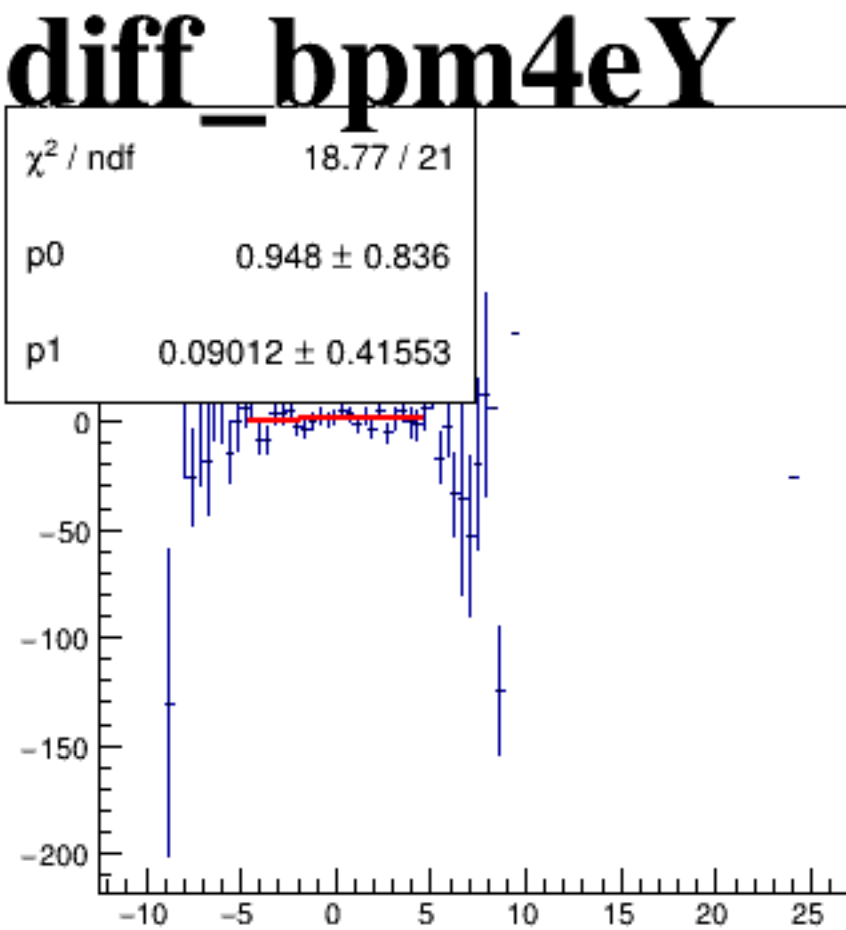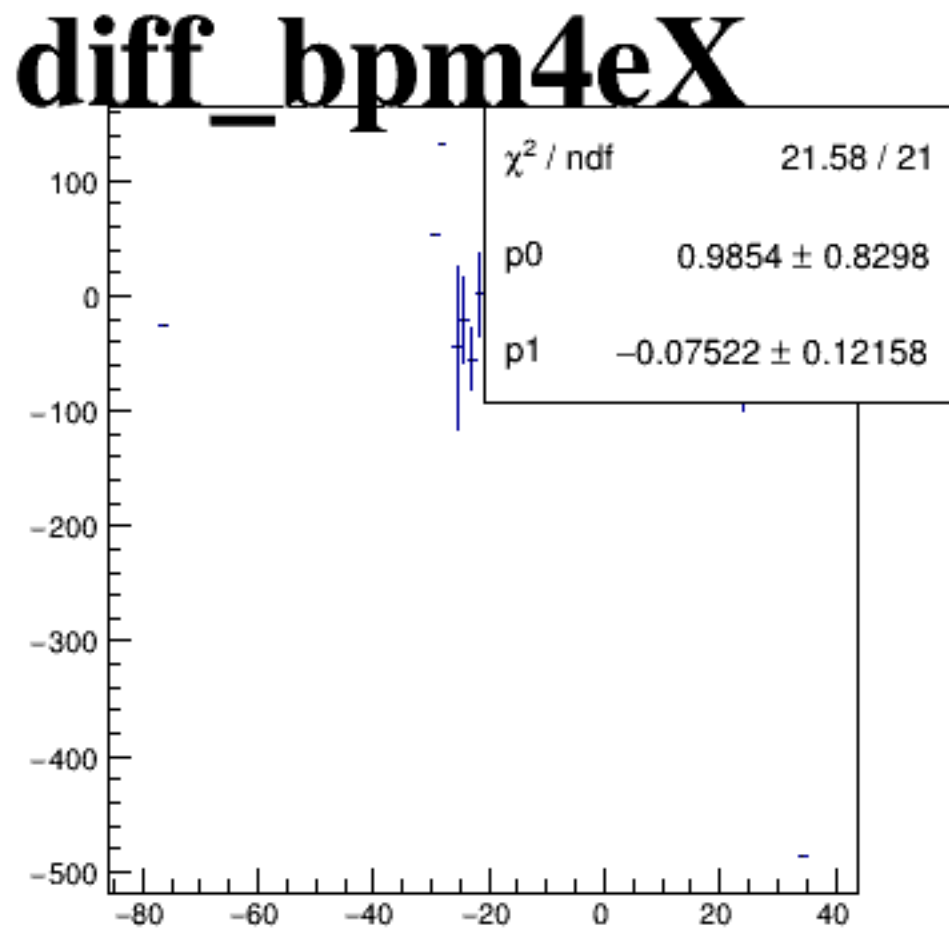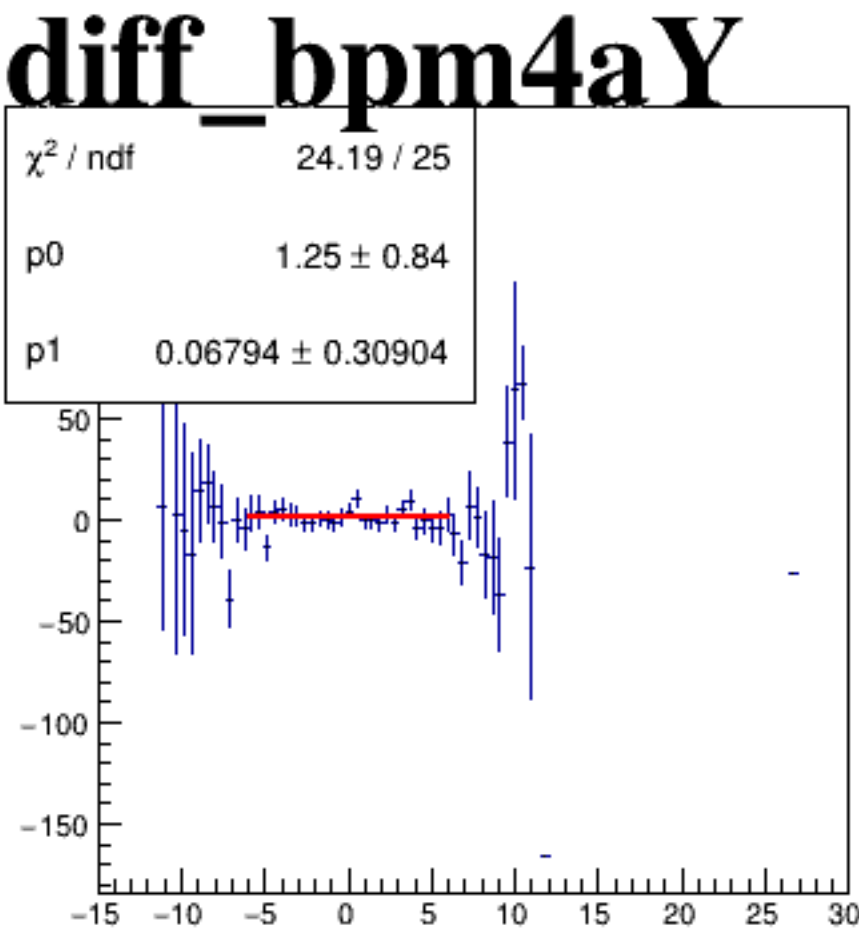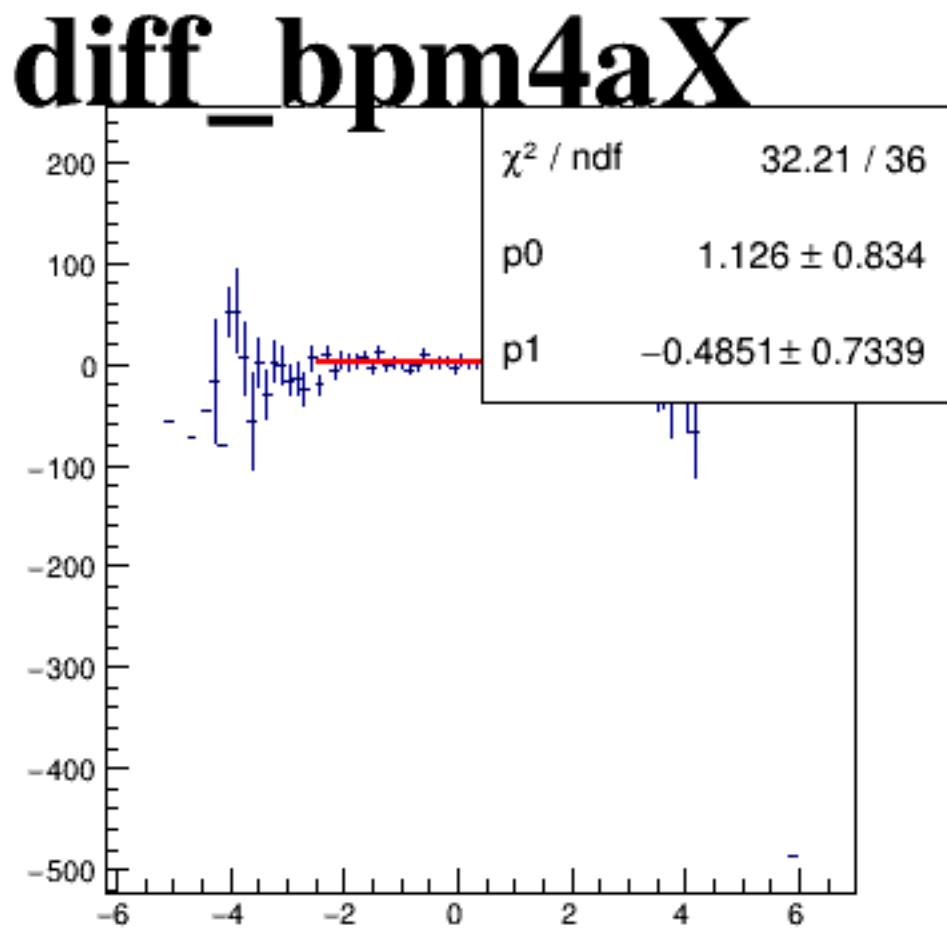






reg_asym_usr

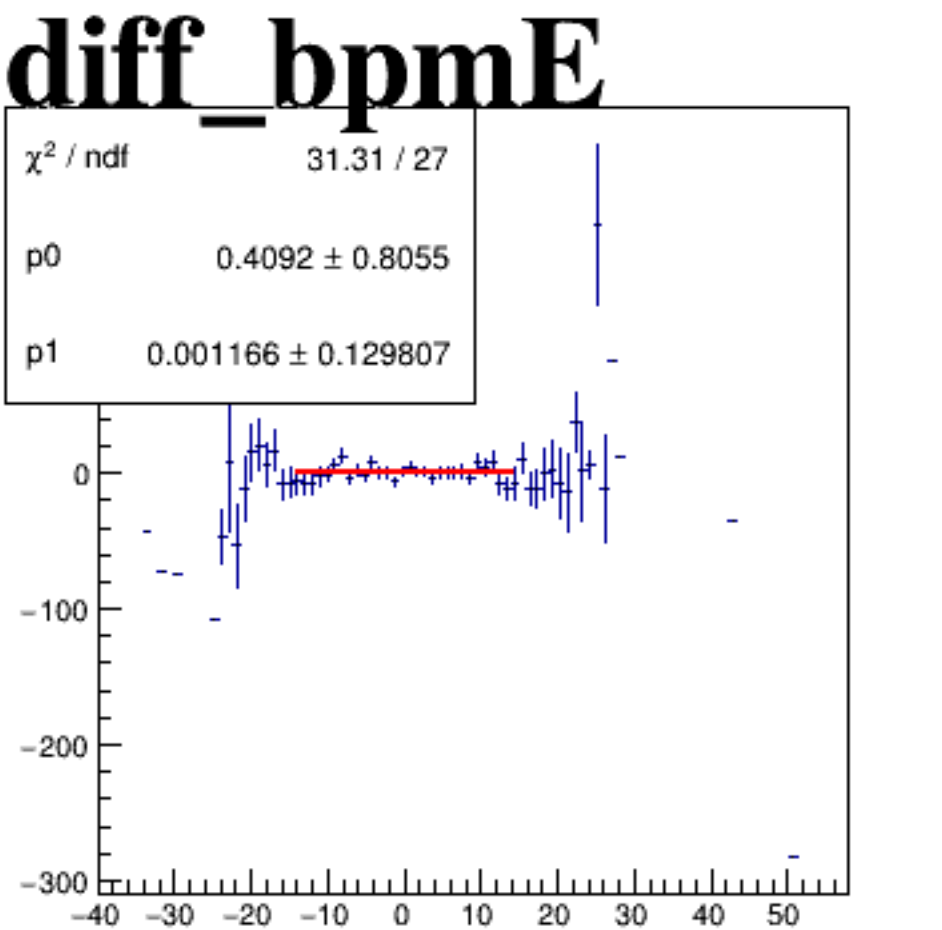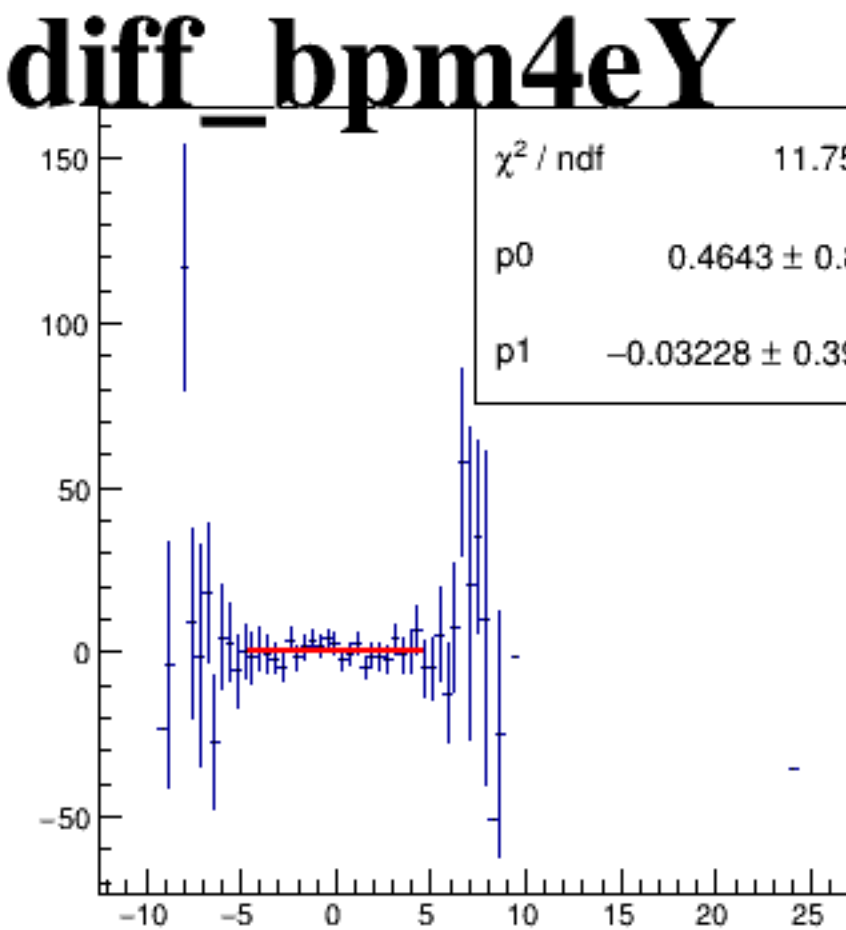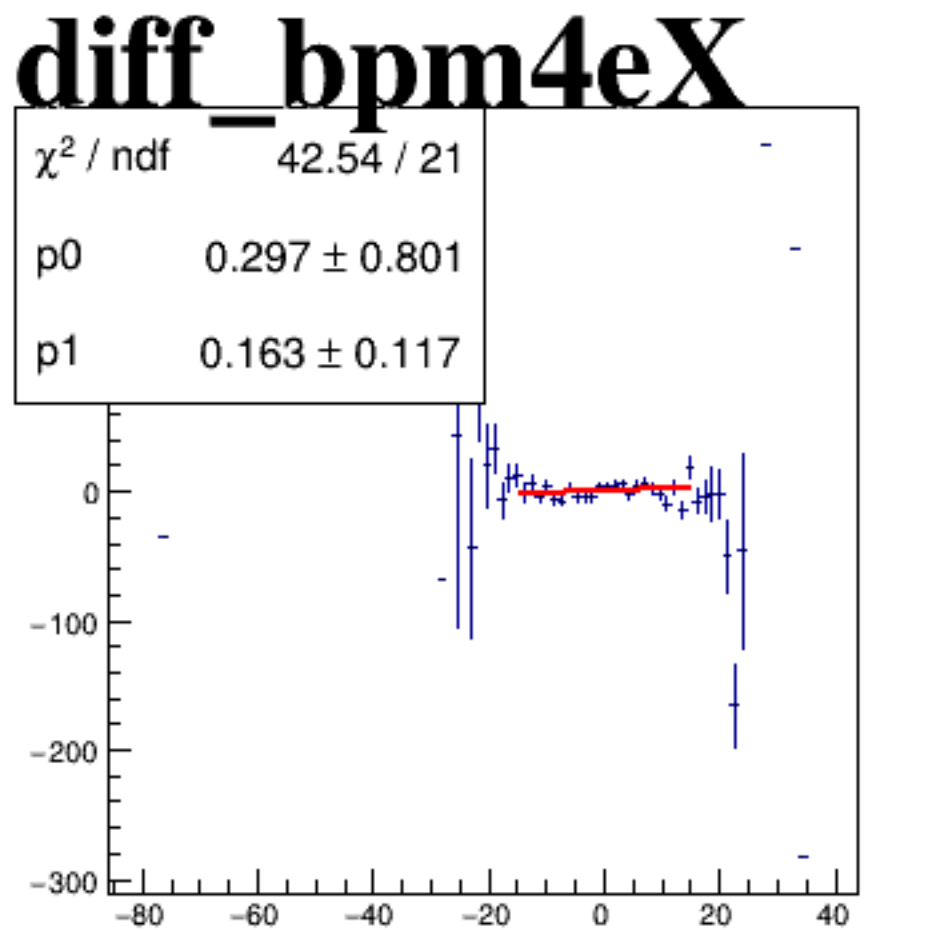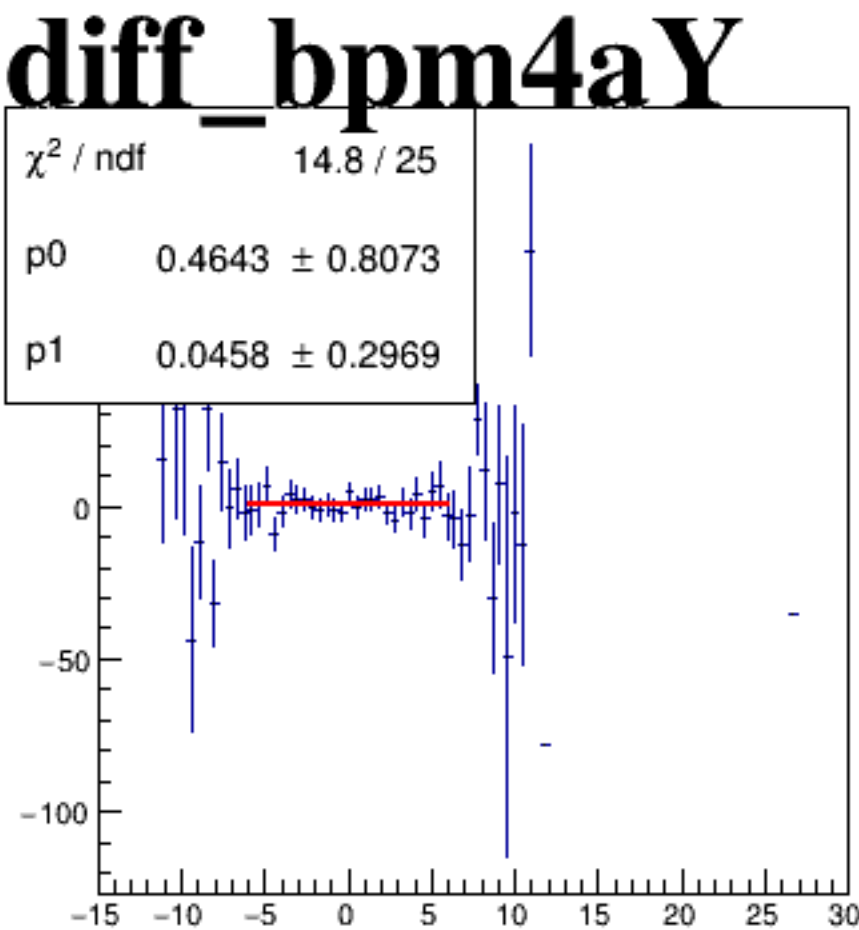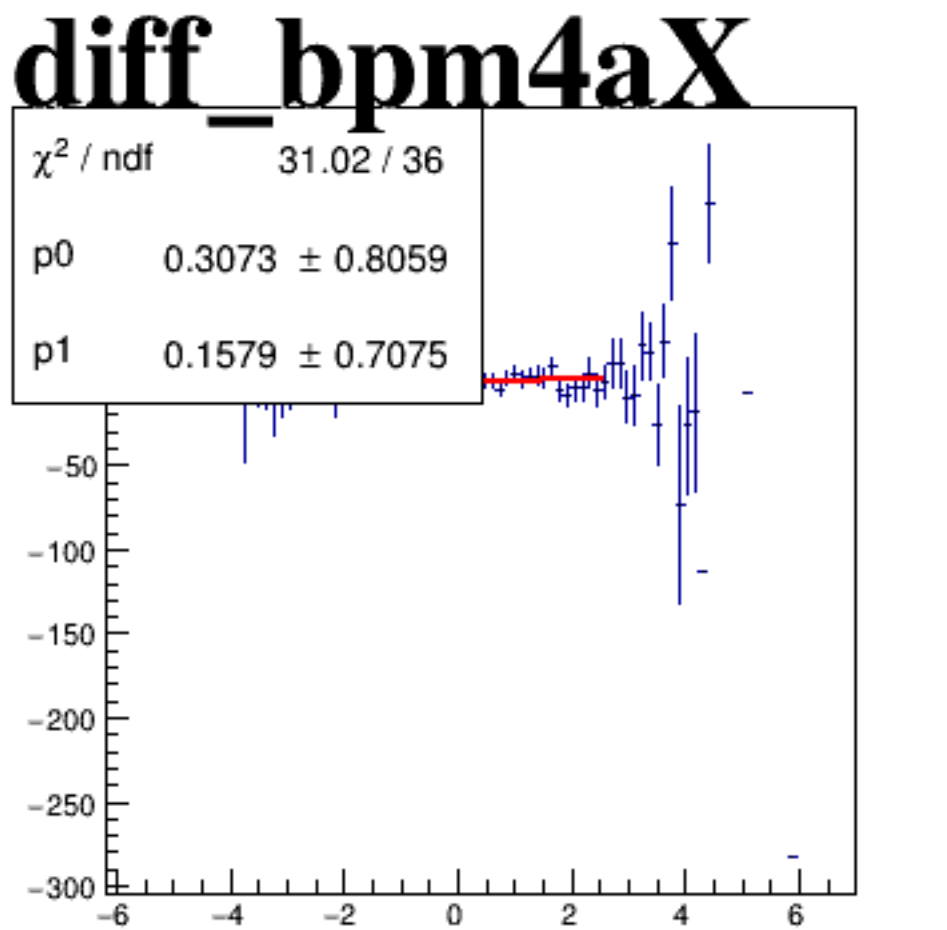






reg_asym_dsr

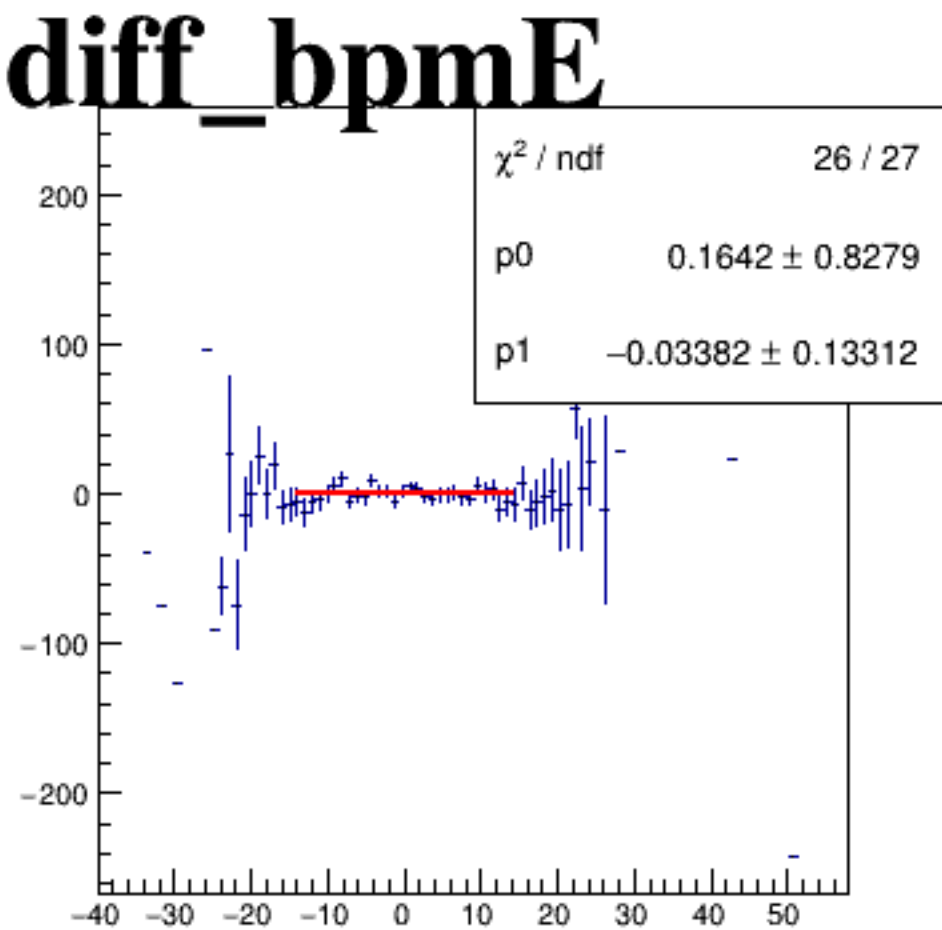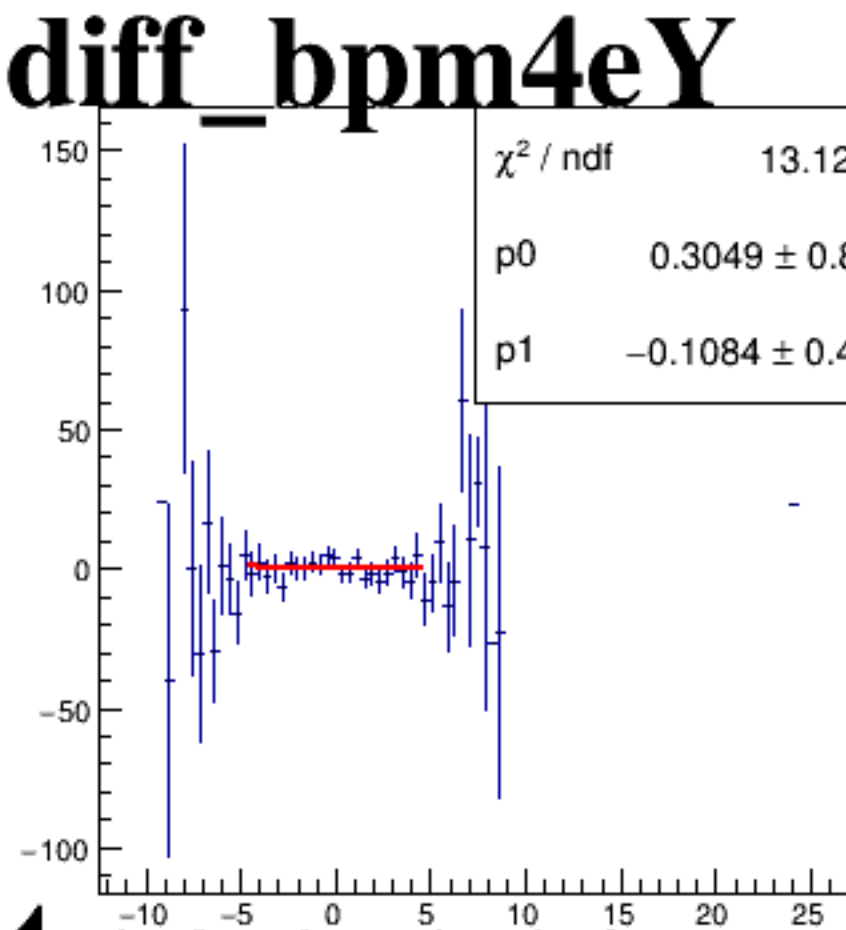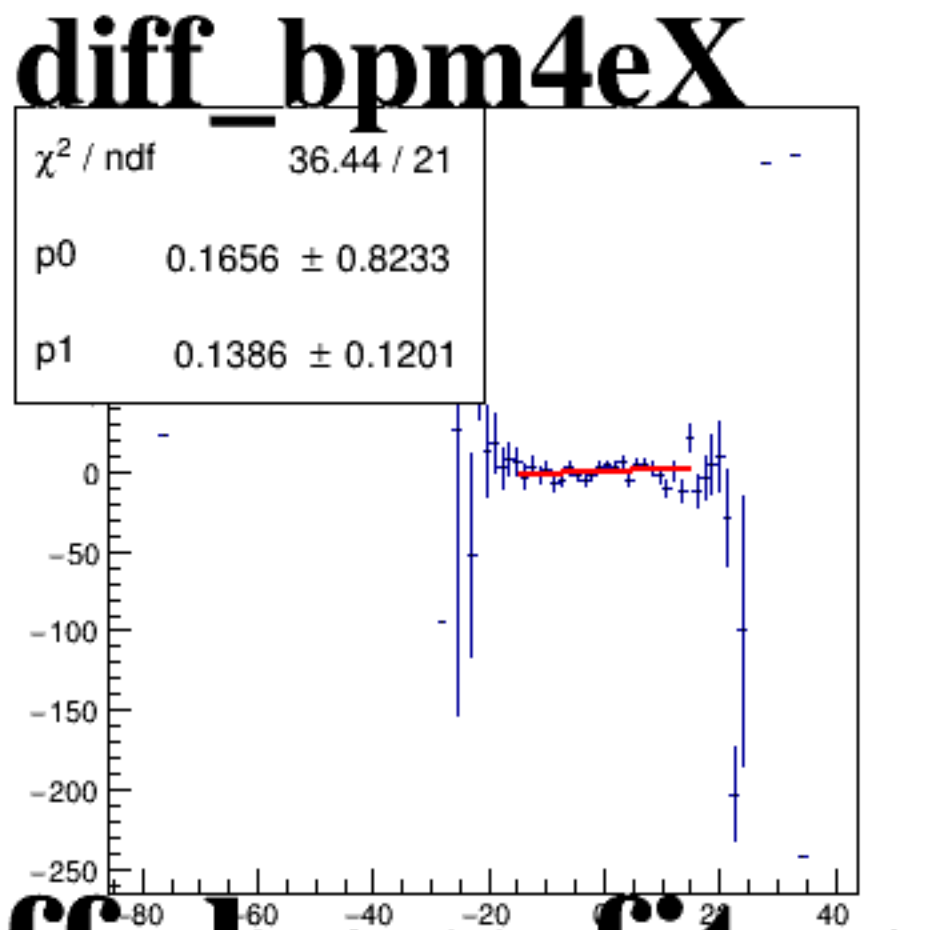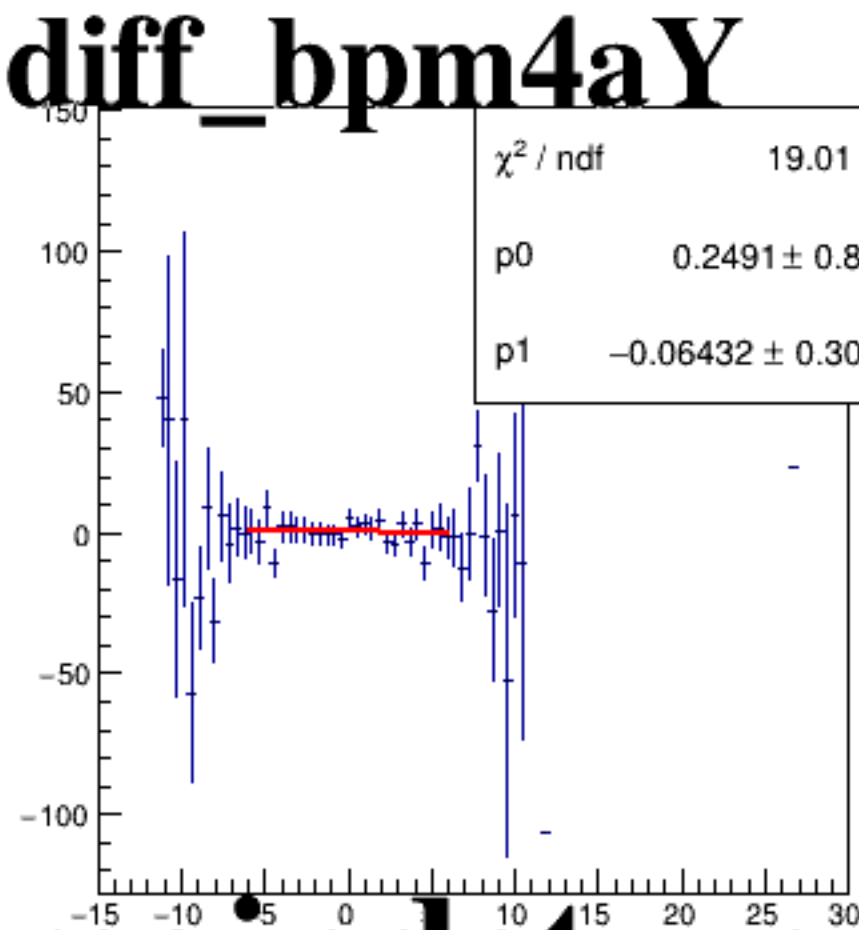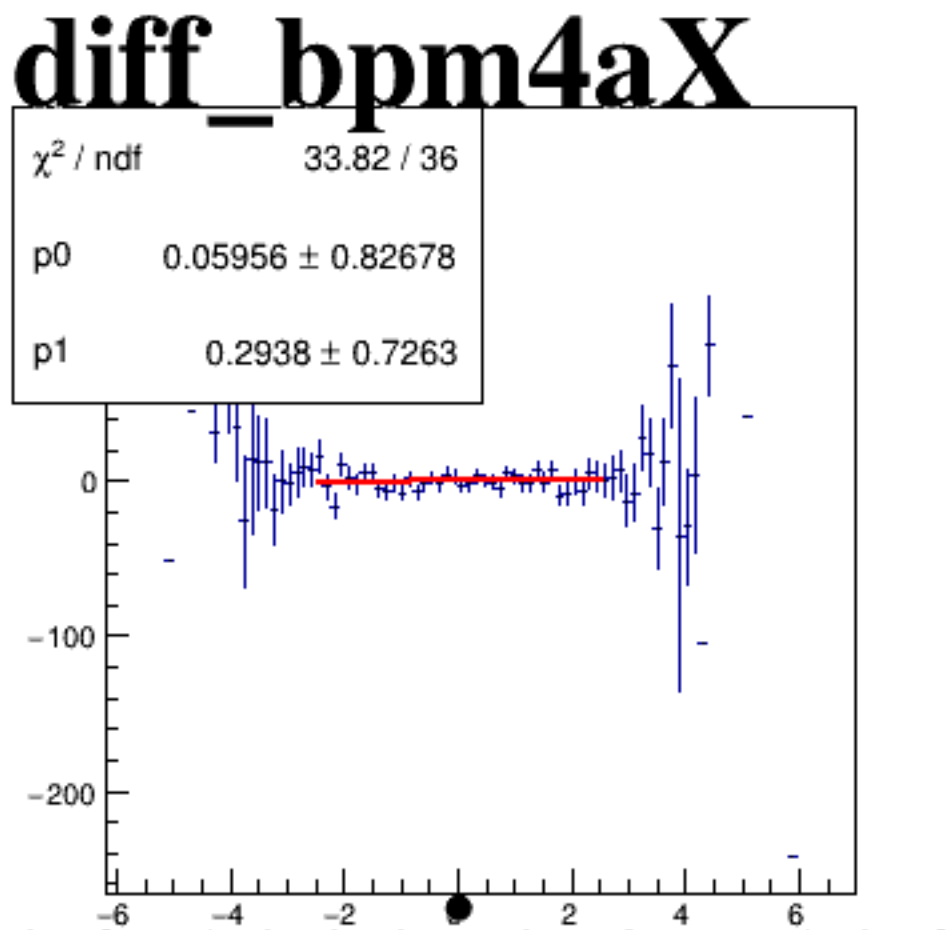






asym_usl

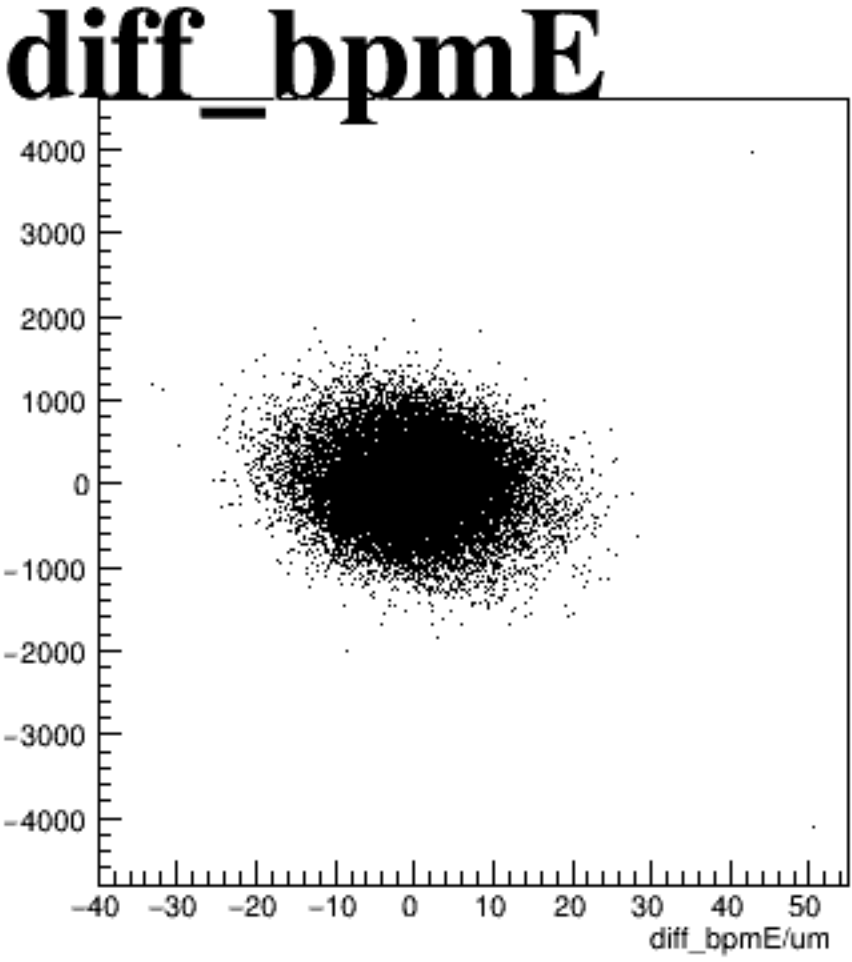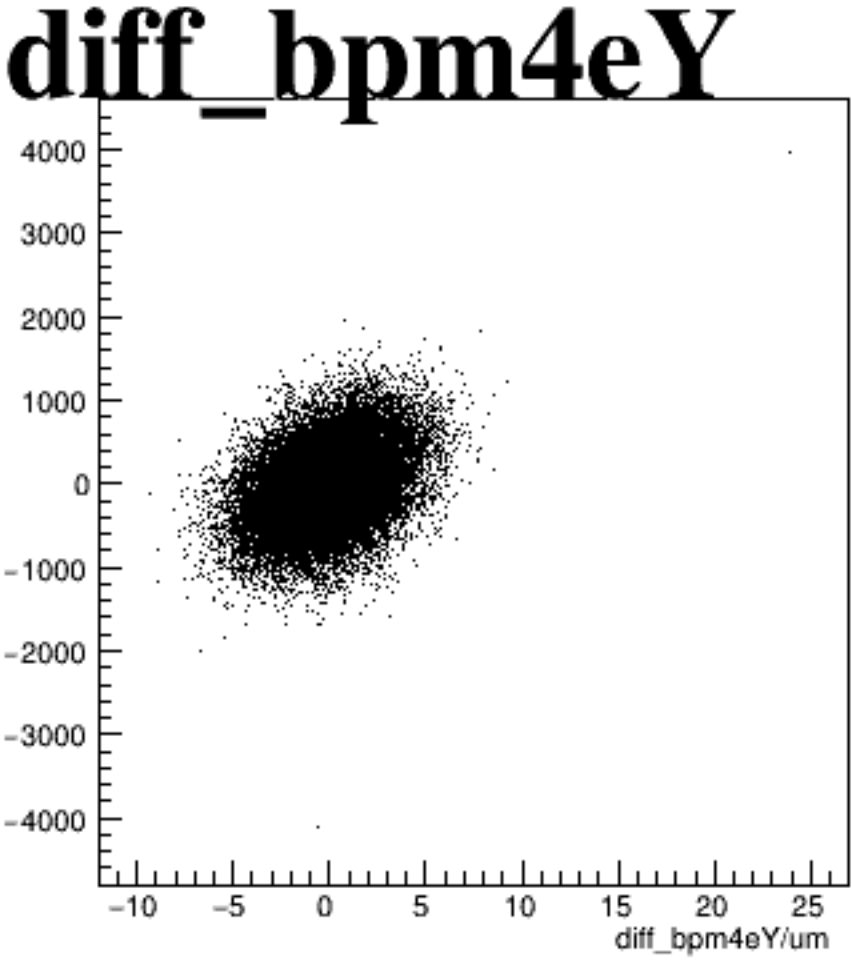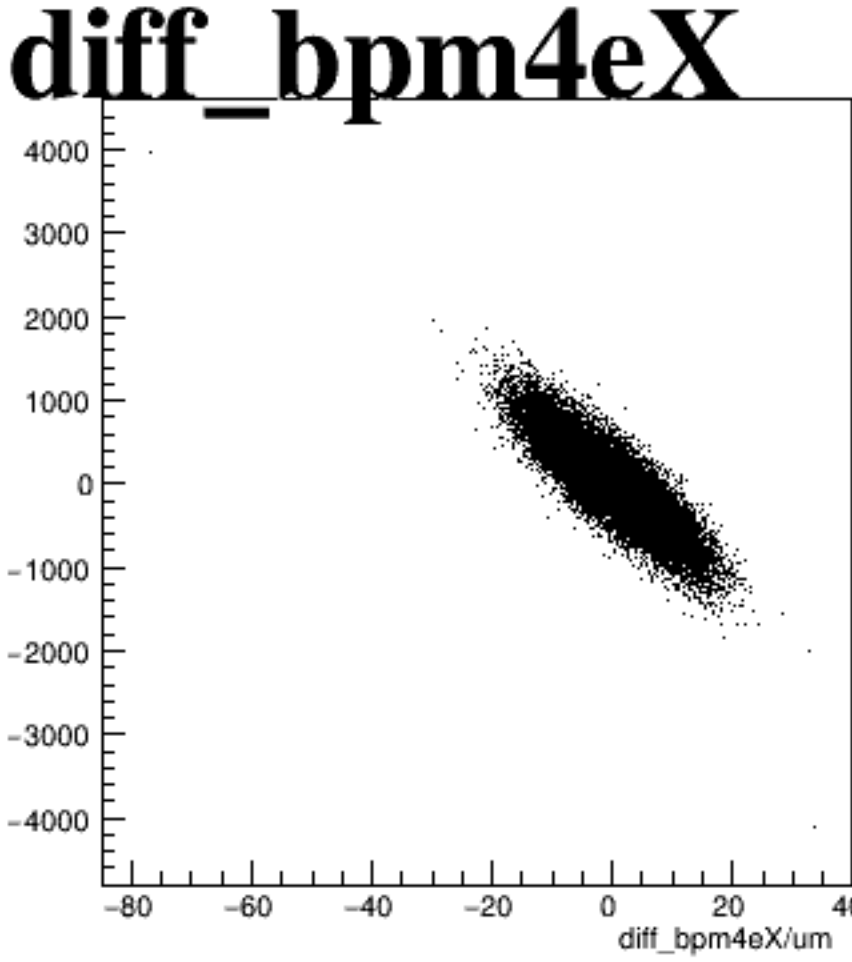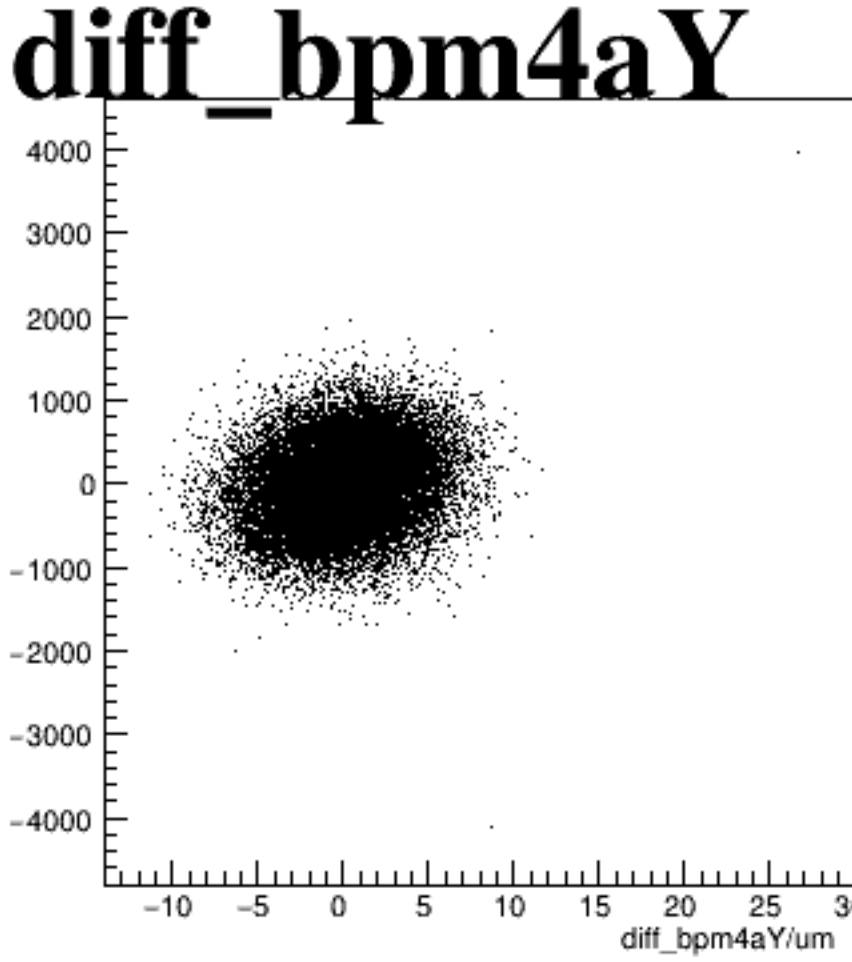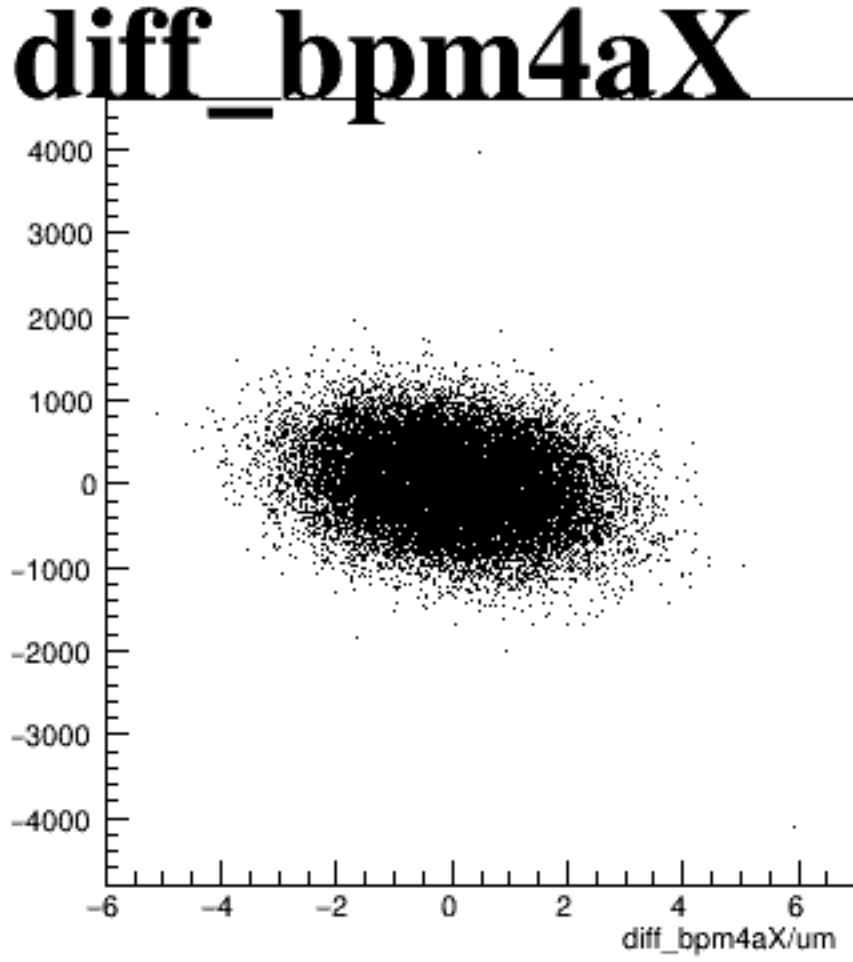






asym_dsl

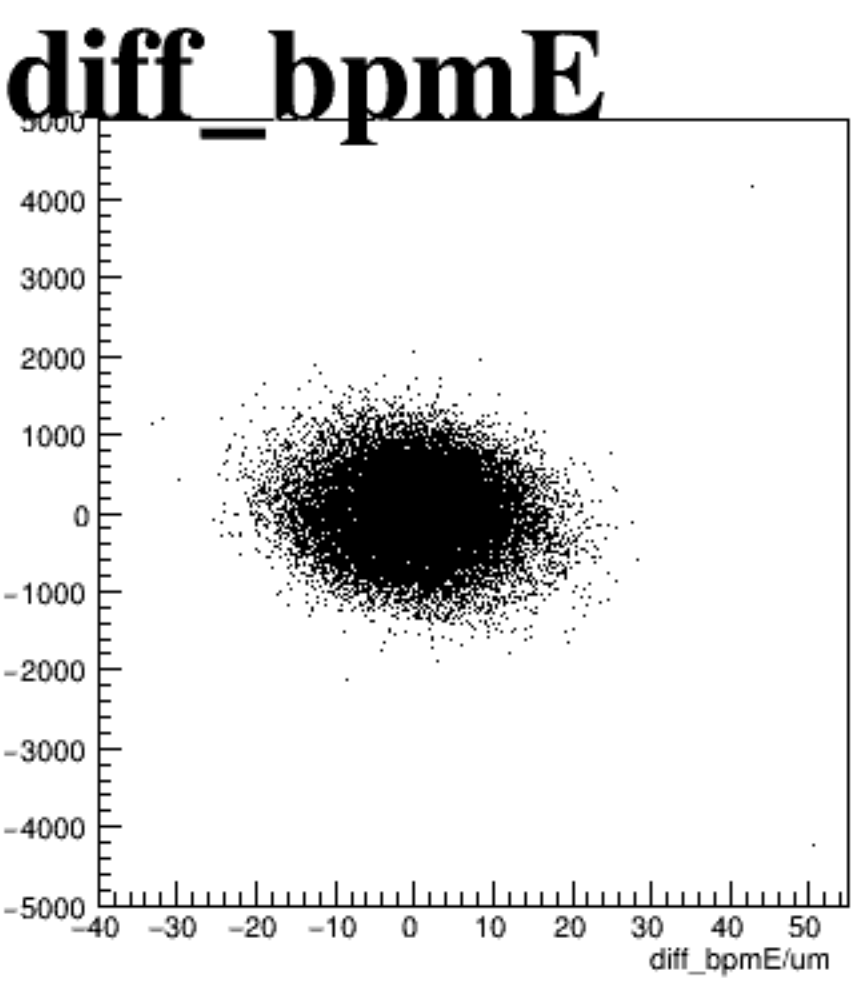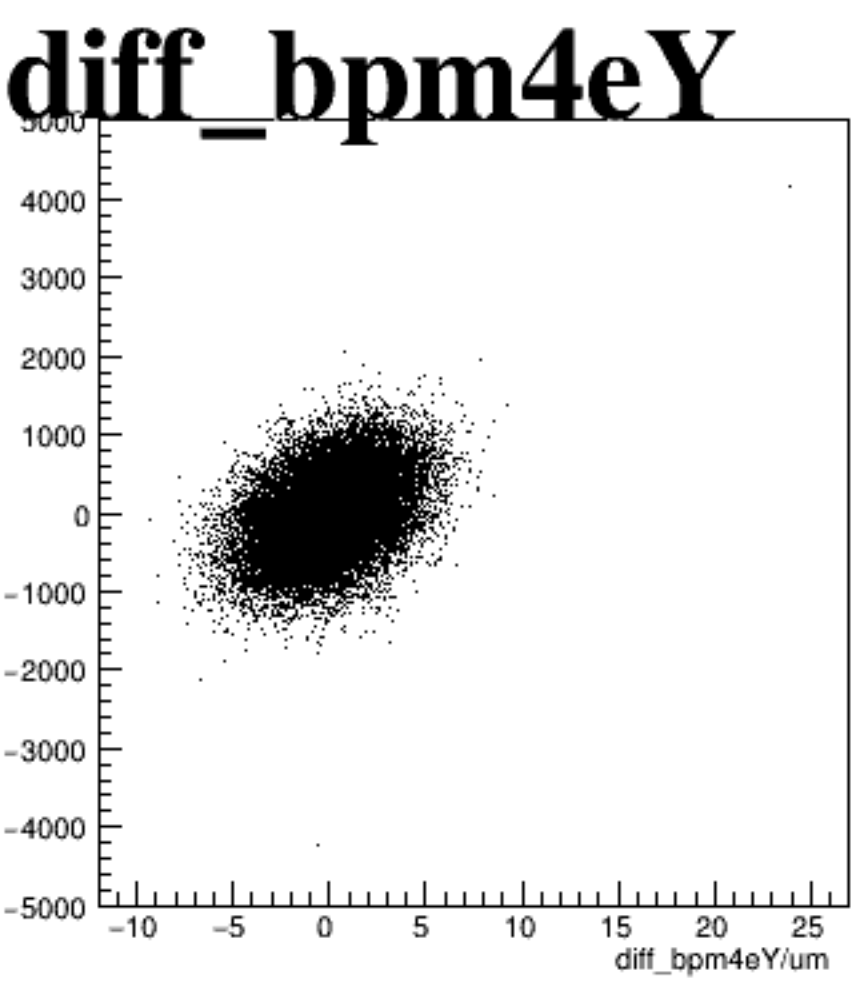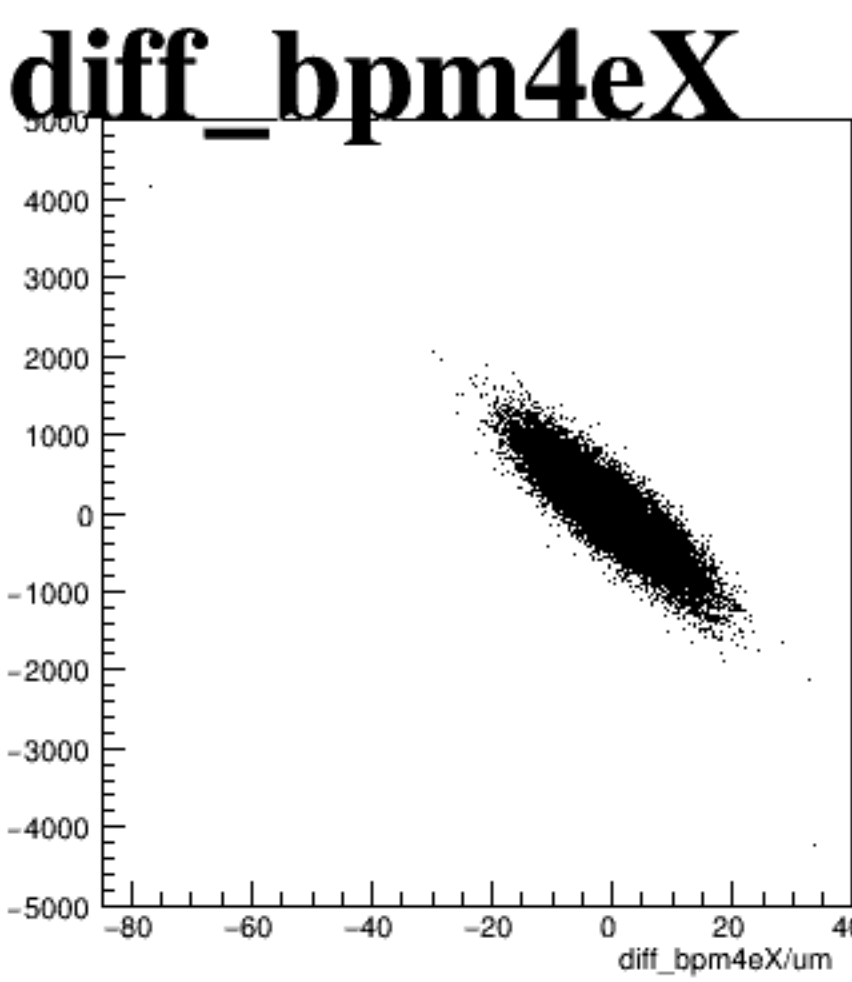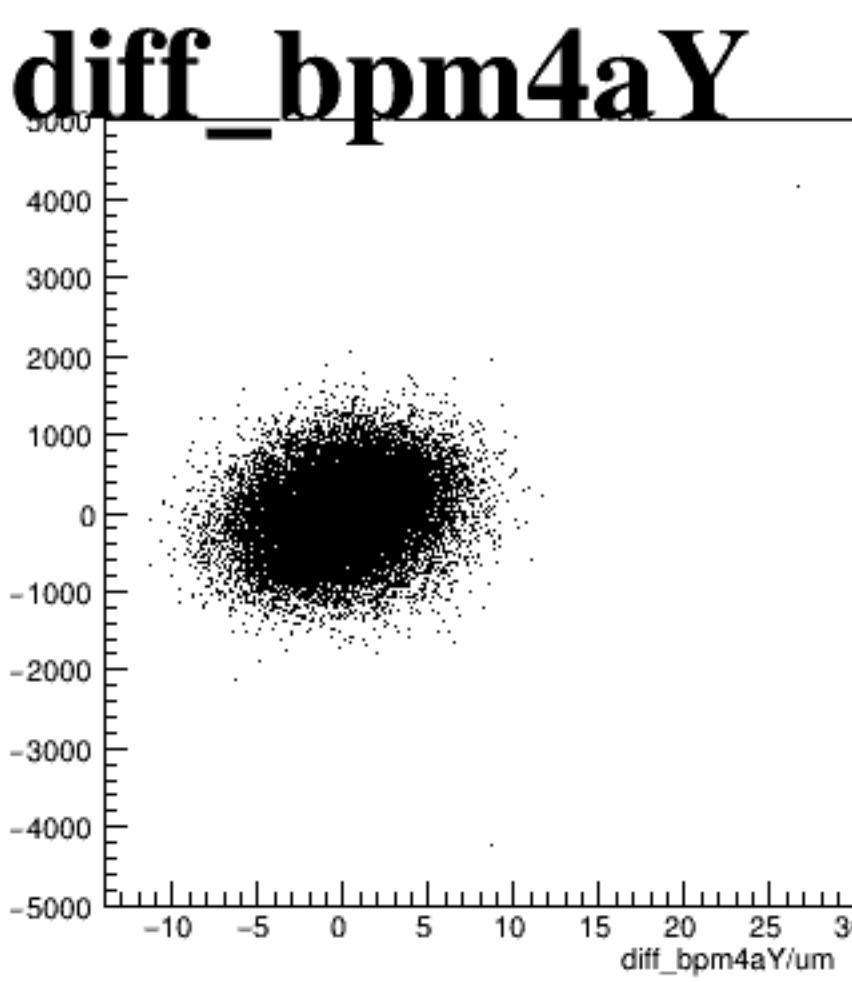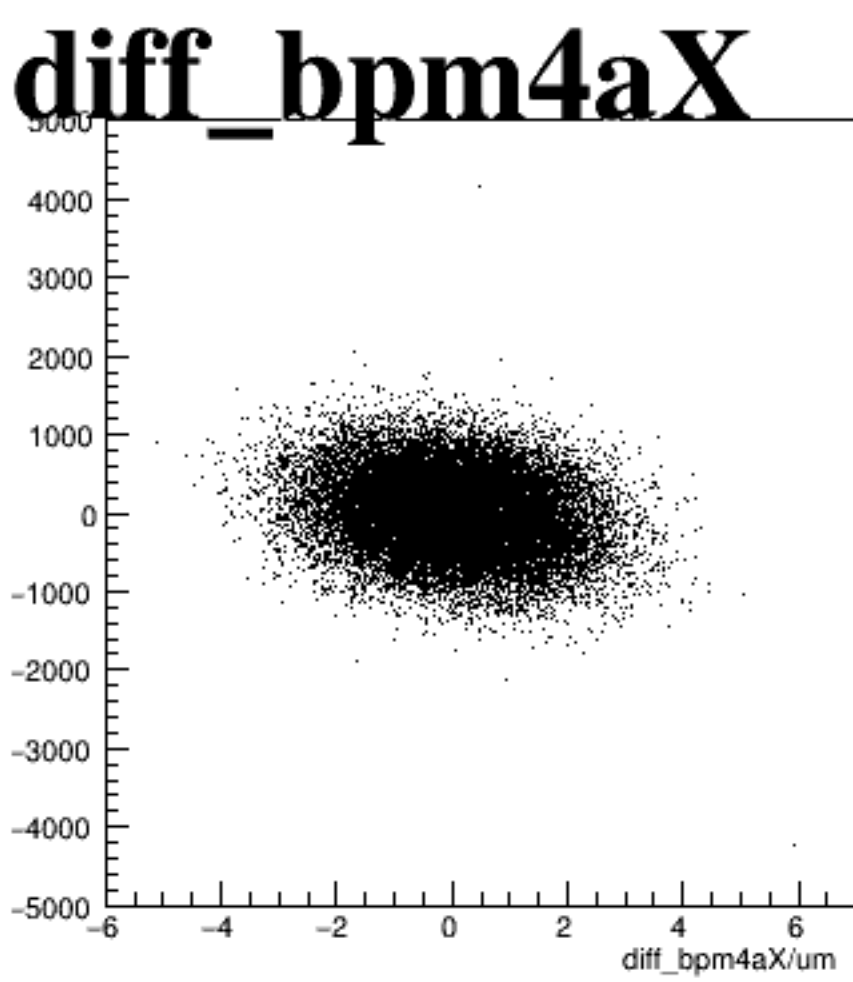

asym_usr

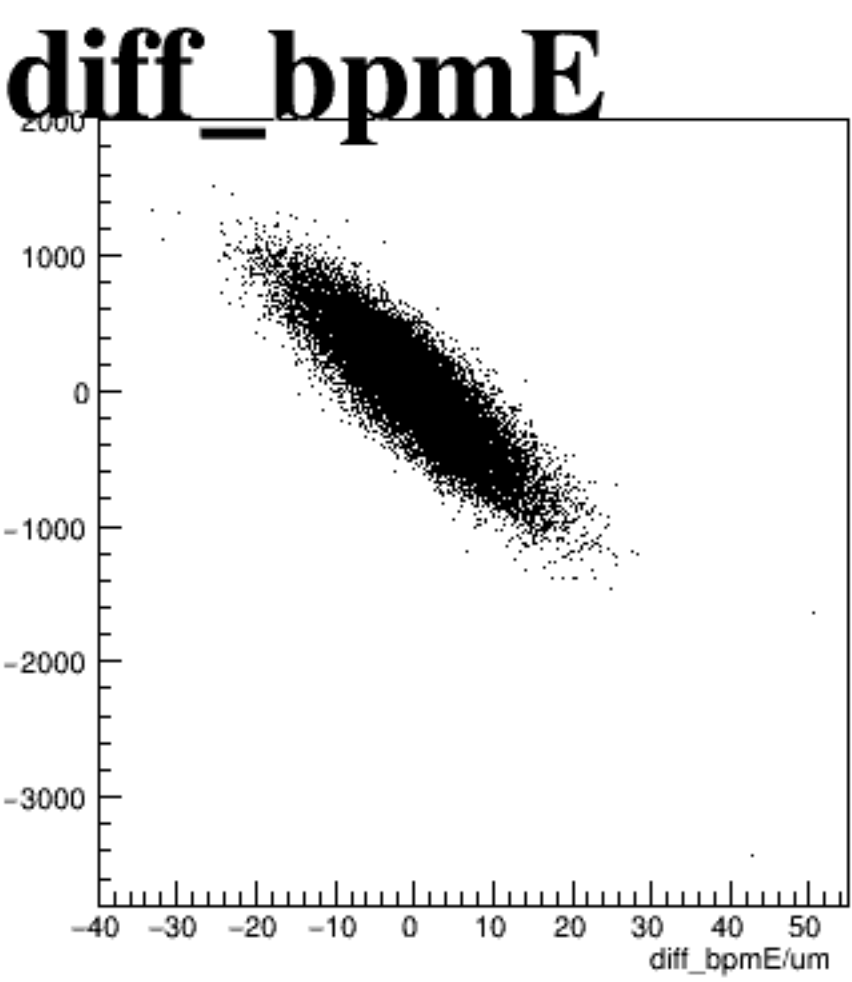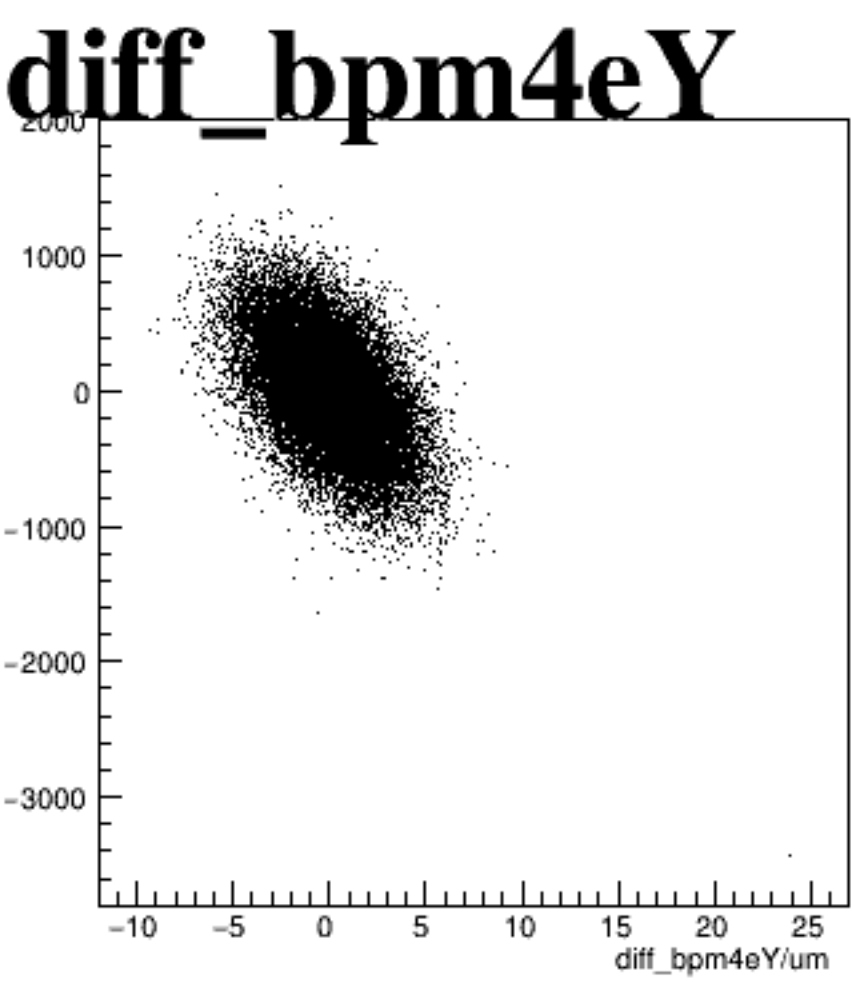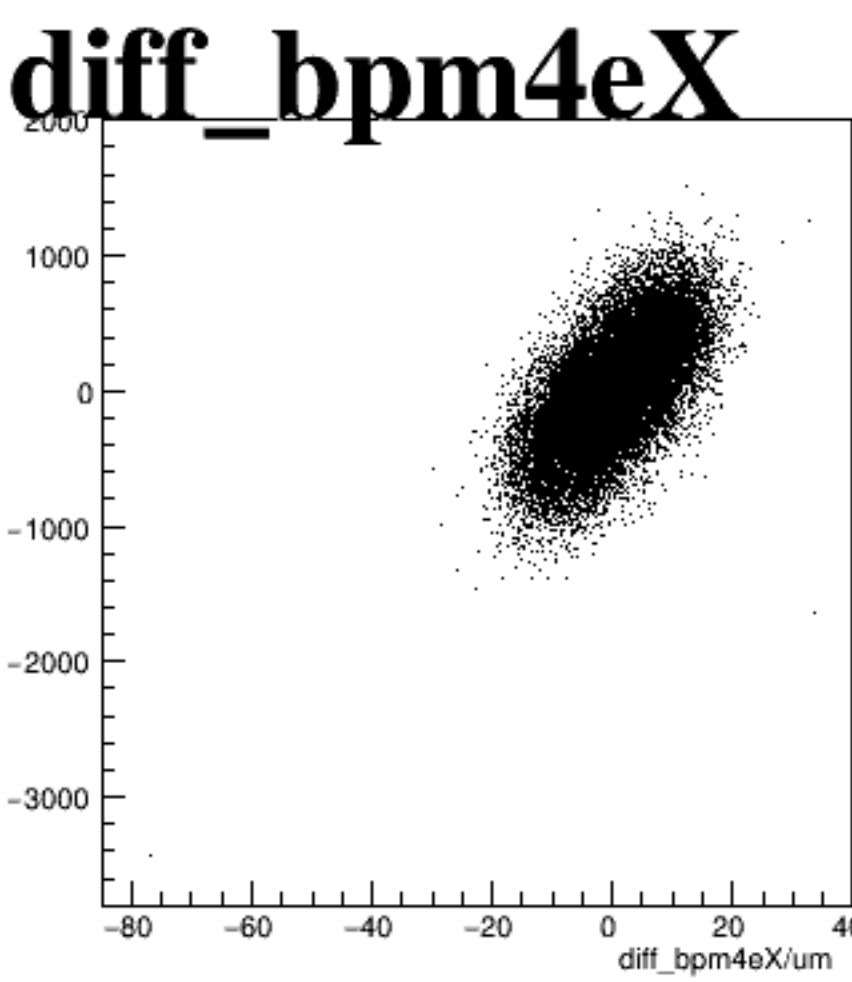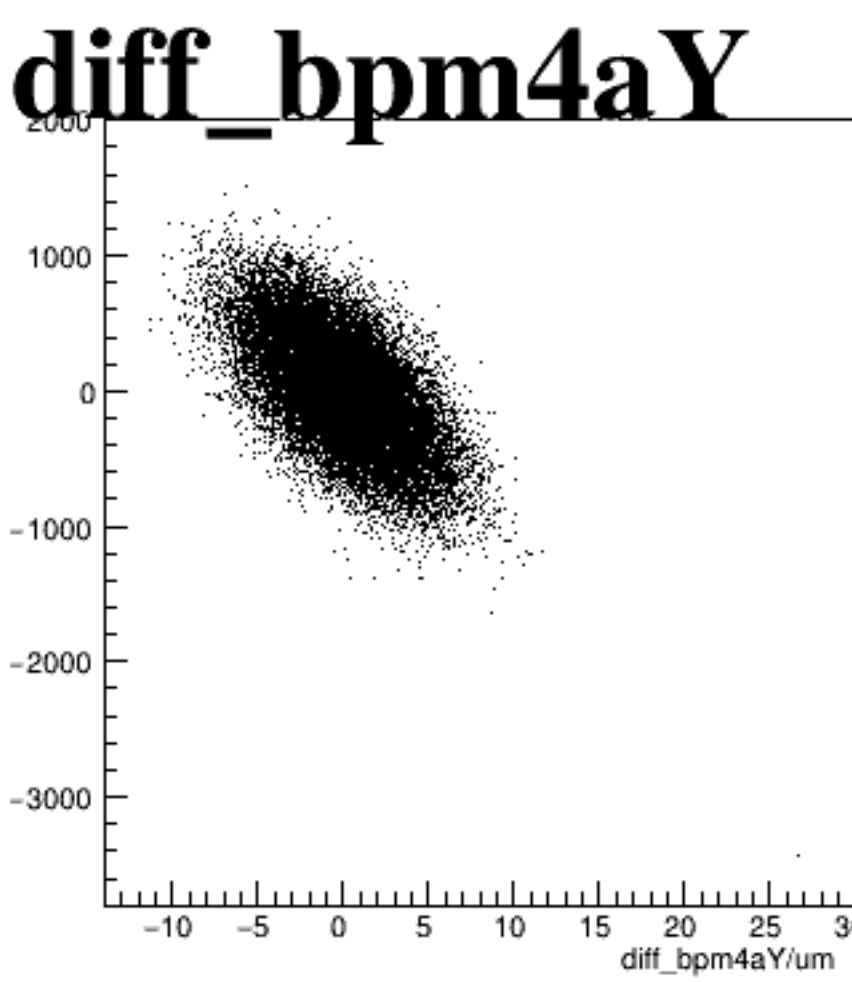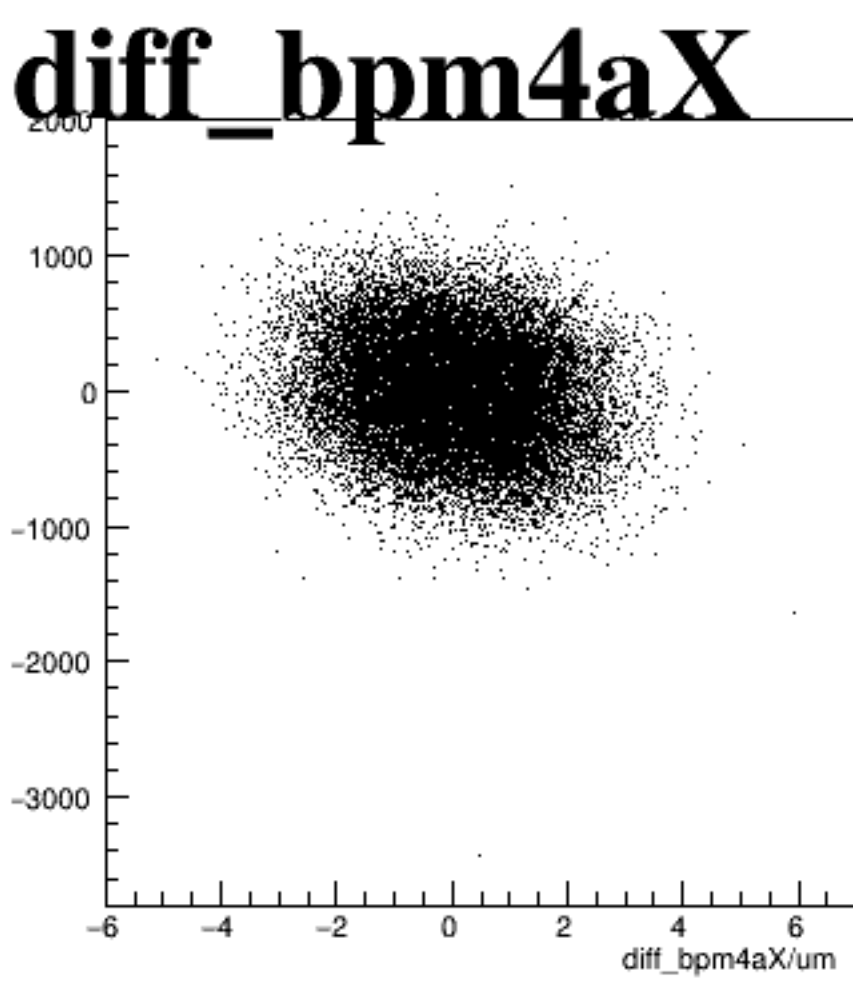

asym_dsr

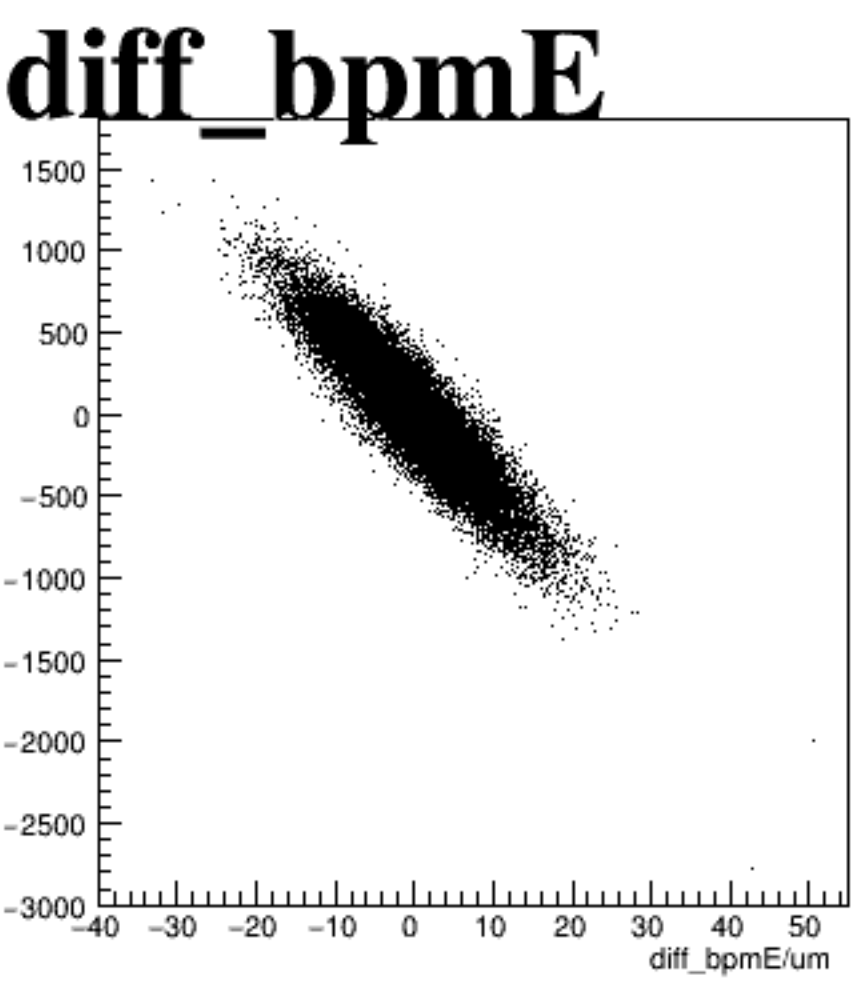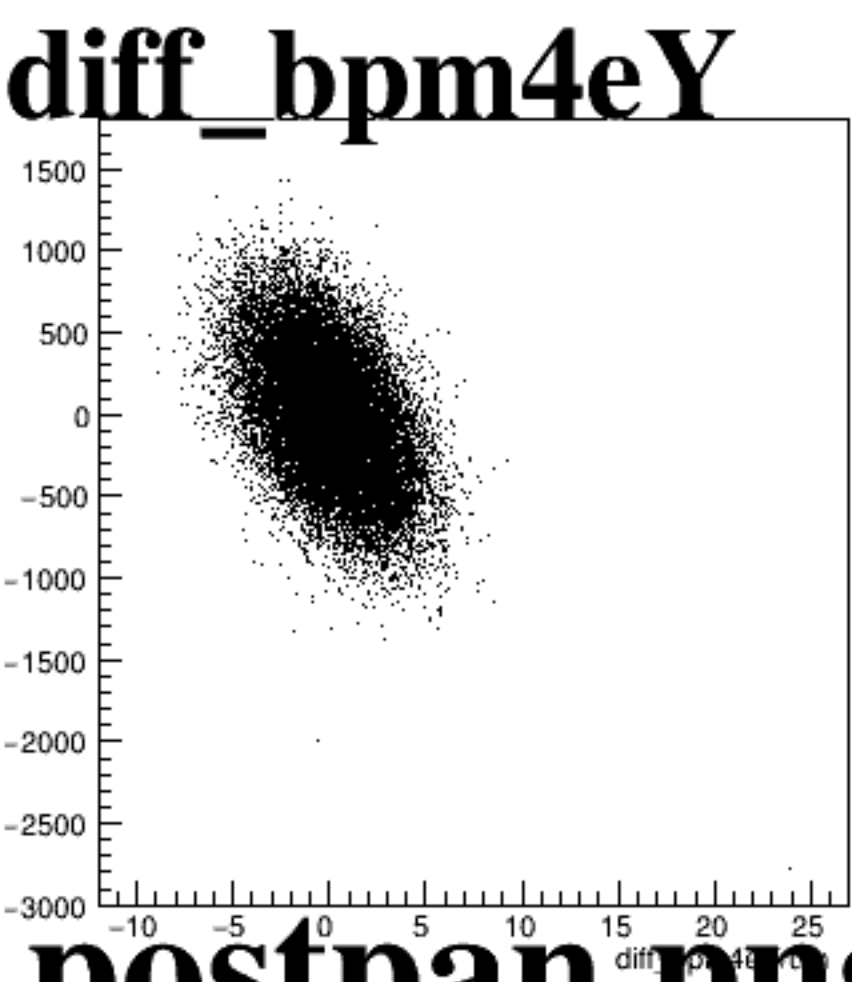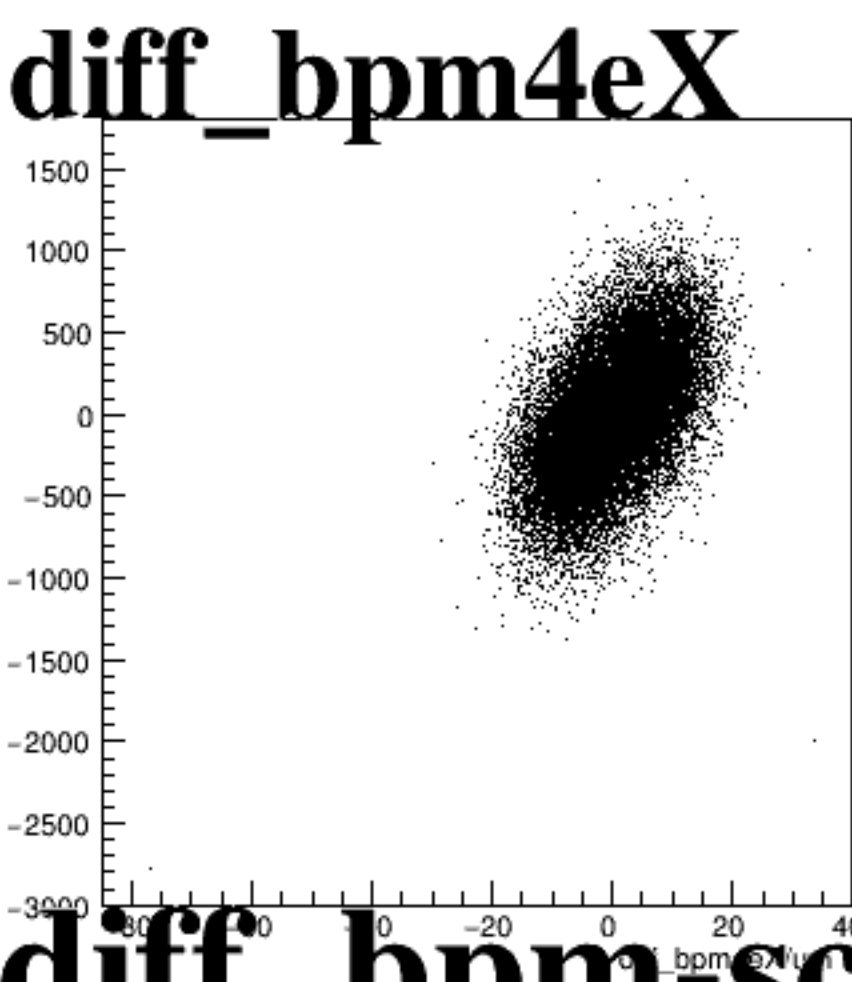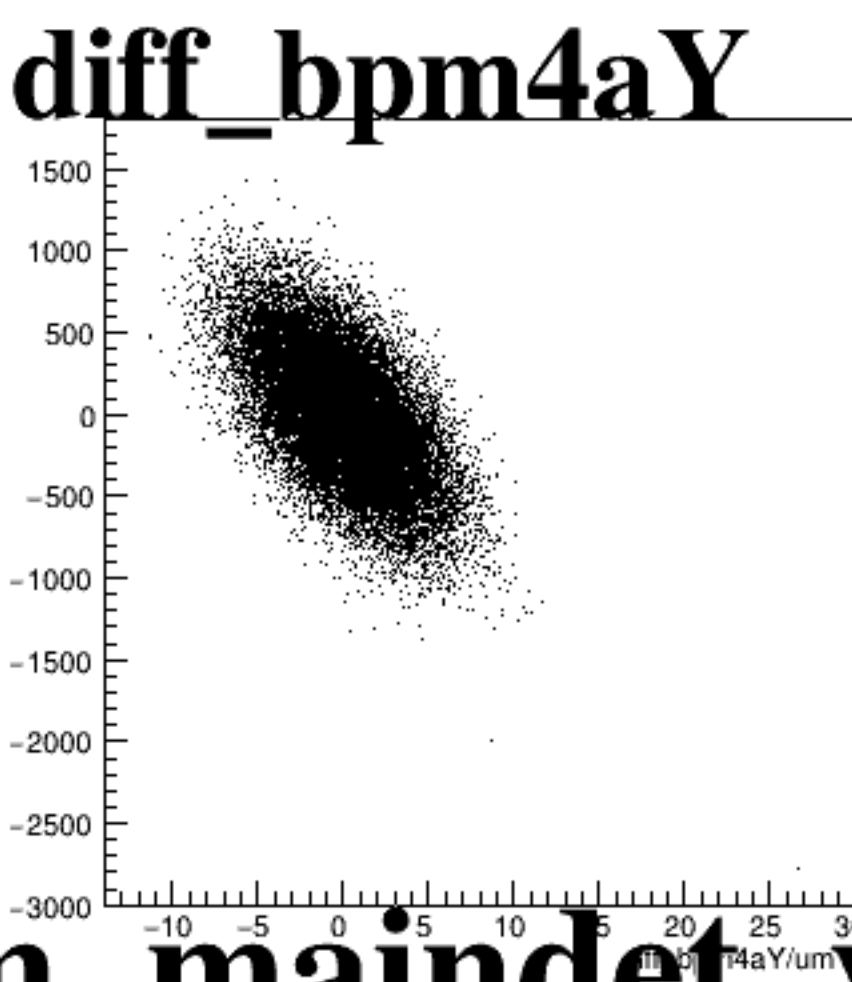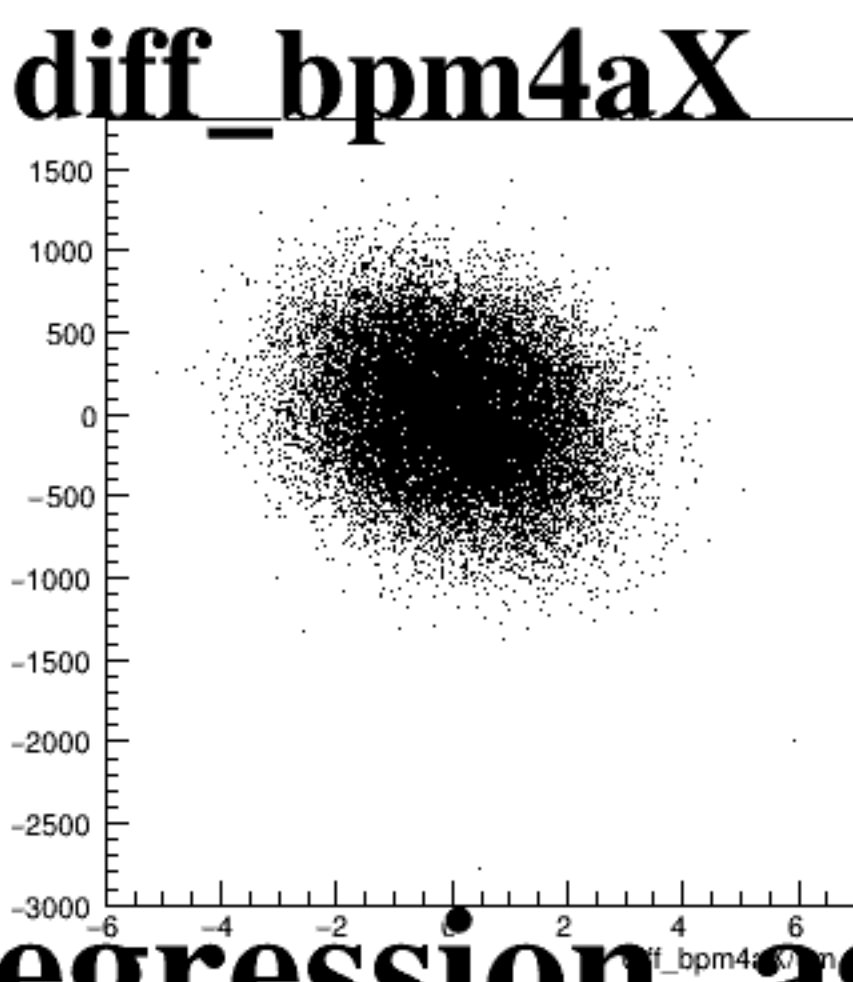

The figure consists of five scatter plots arranged horizontally, each showing the difference in BPM (diff_bpm) for a specific parameter (X, Y, eX, eY, E) in micrometers (um). The y-axis for all plots is labeled 'diff_bpm' and ranges from -400 to 600. The x-axis for each plot is labeled 'diff_bpm[parameter]/um' and ranges from -6 to 6 for X, -10 to 30 for Y, -80 to 40 for eX, -10 to 25 for eY, and -40 to 50 for E. All plots show a dense cloud of points centered around zero, indicating that the difference in BPM is generally small and centered around zero for all parameters.