




asym_atl1

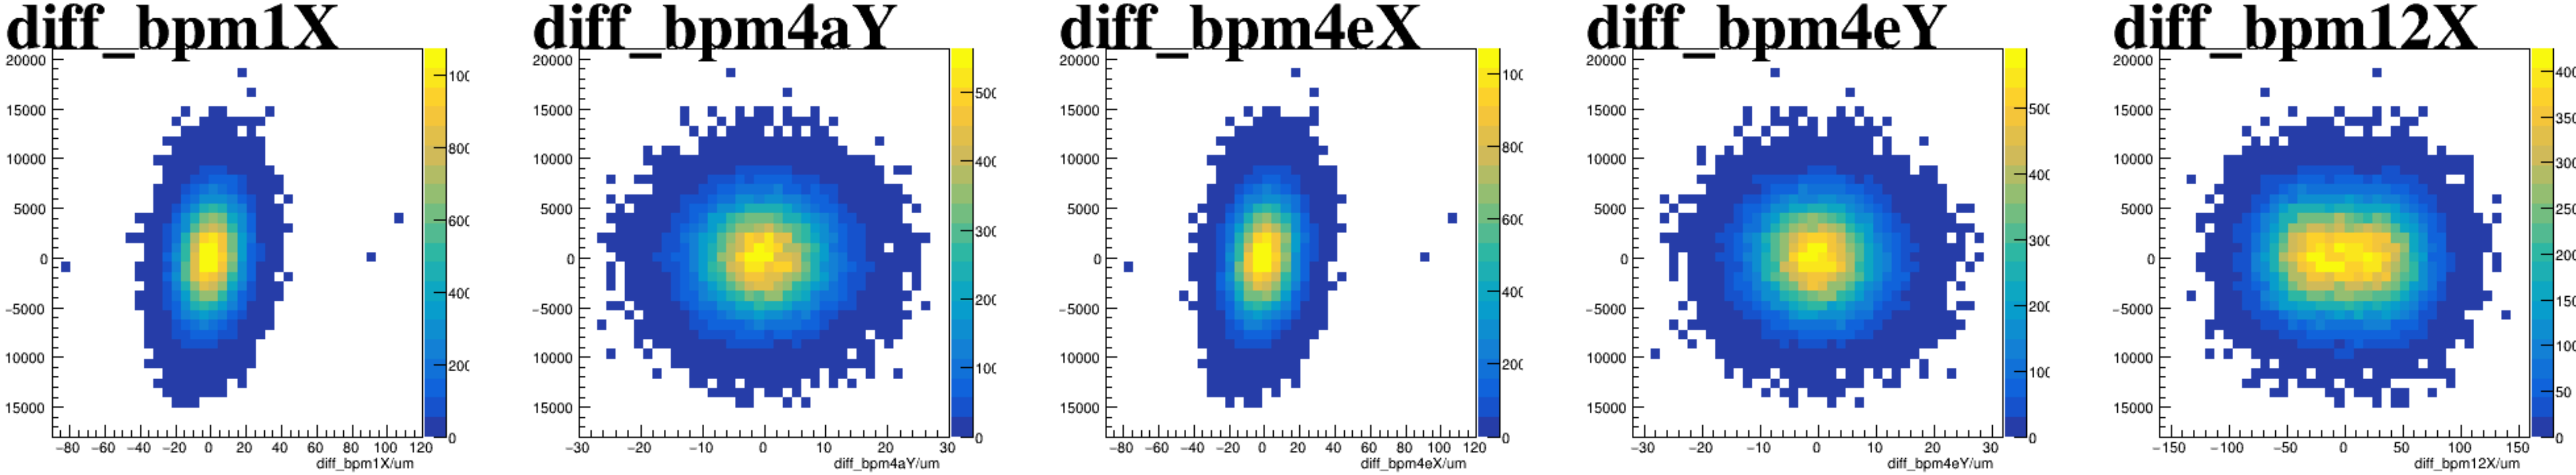


asym_atr1

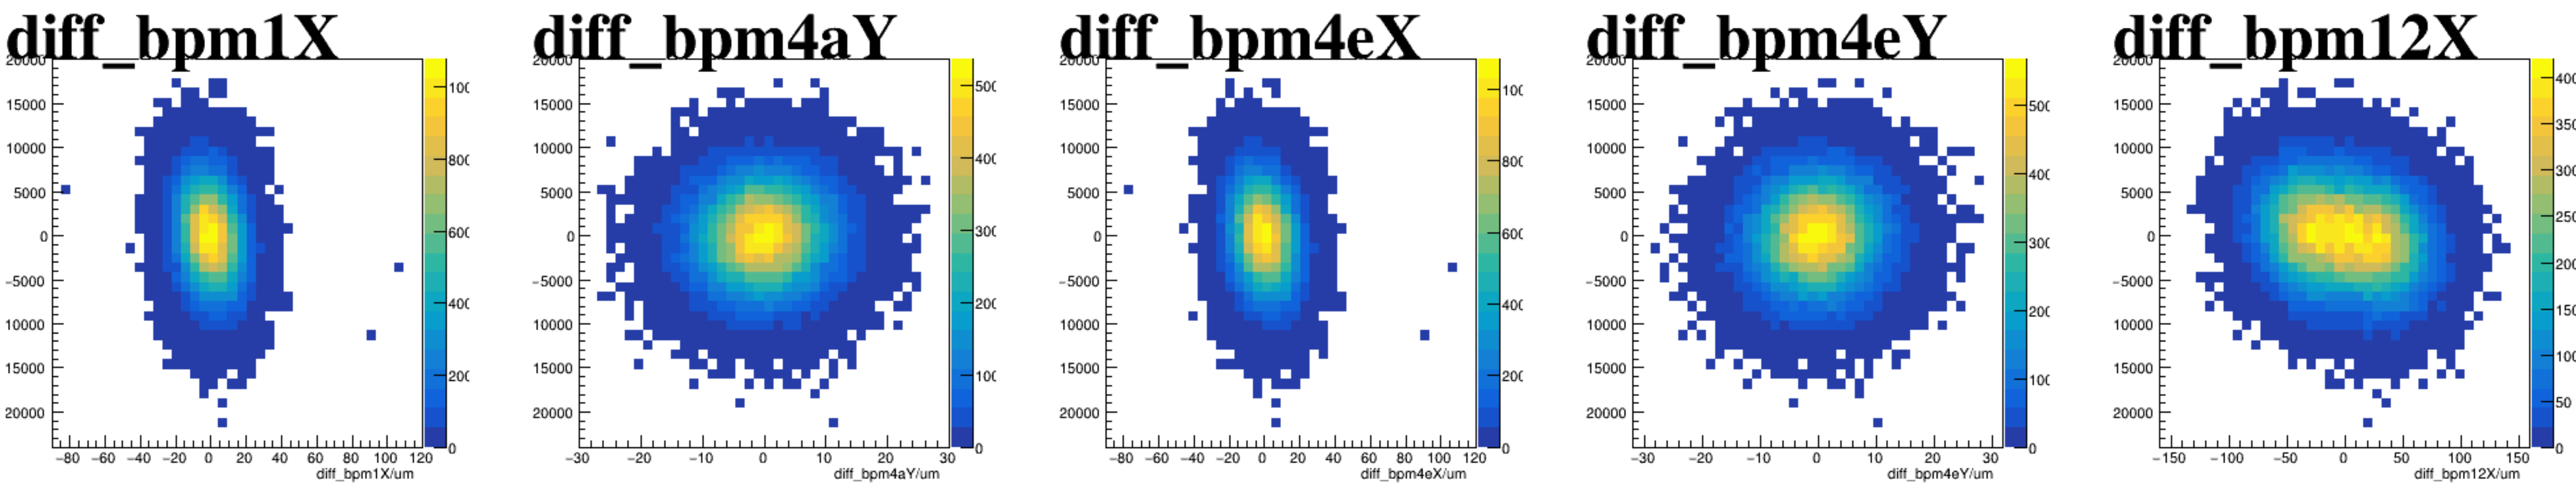


asym_atl2

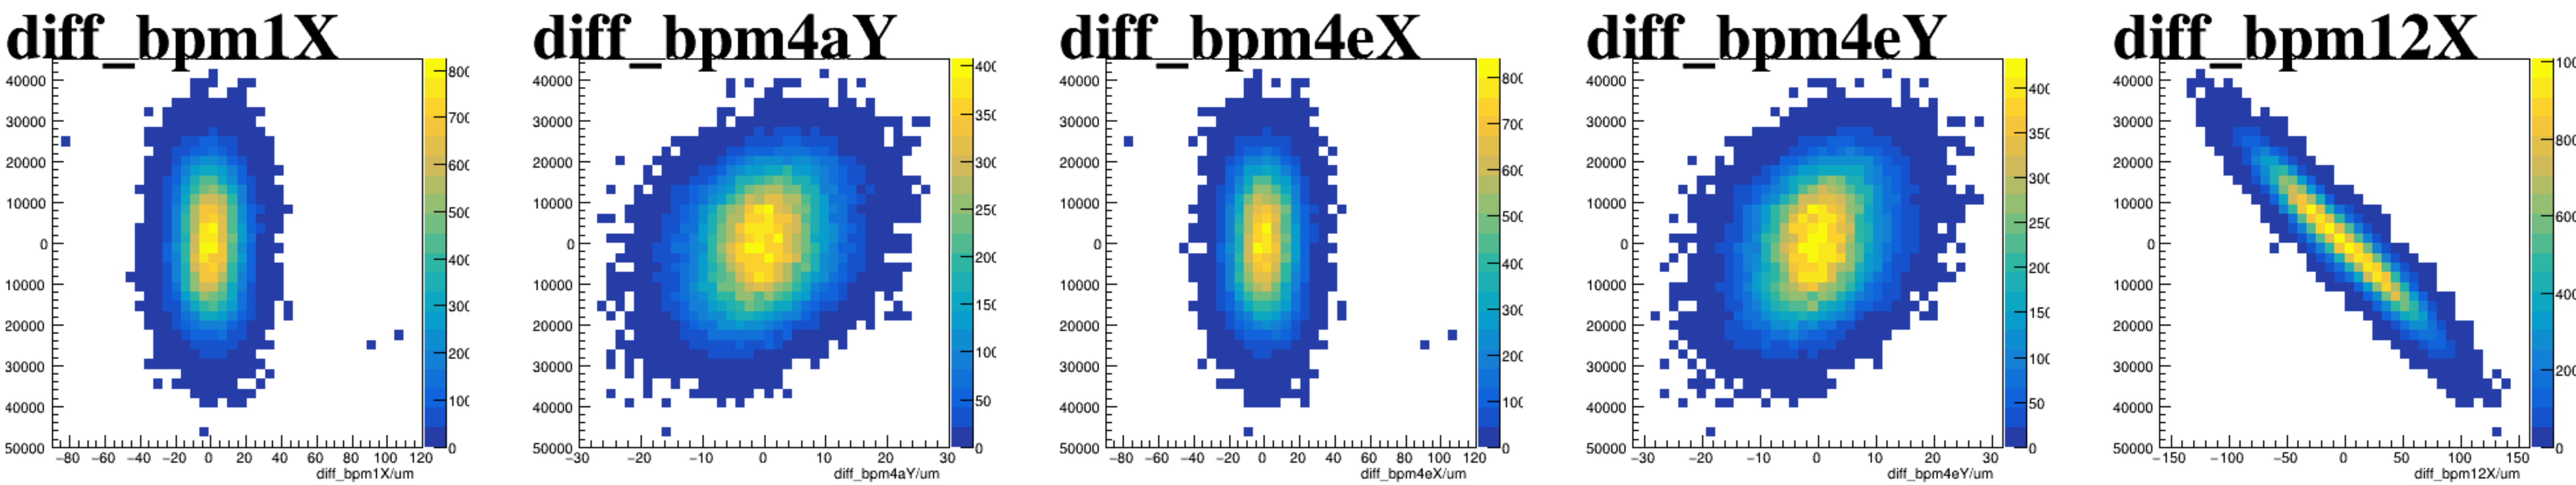


asym_atr2

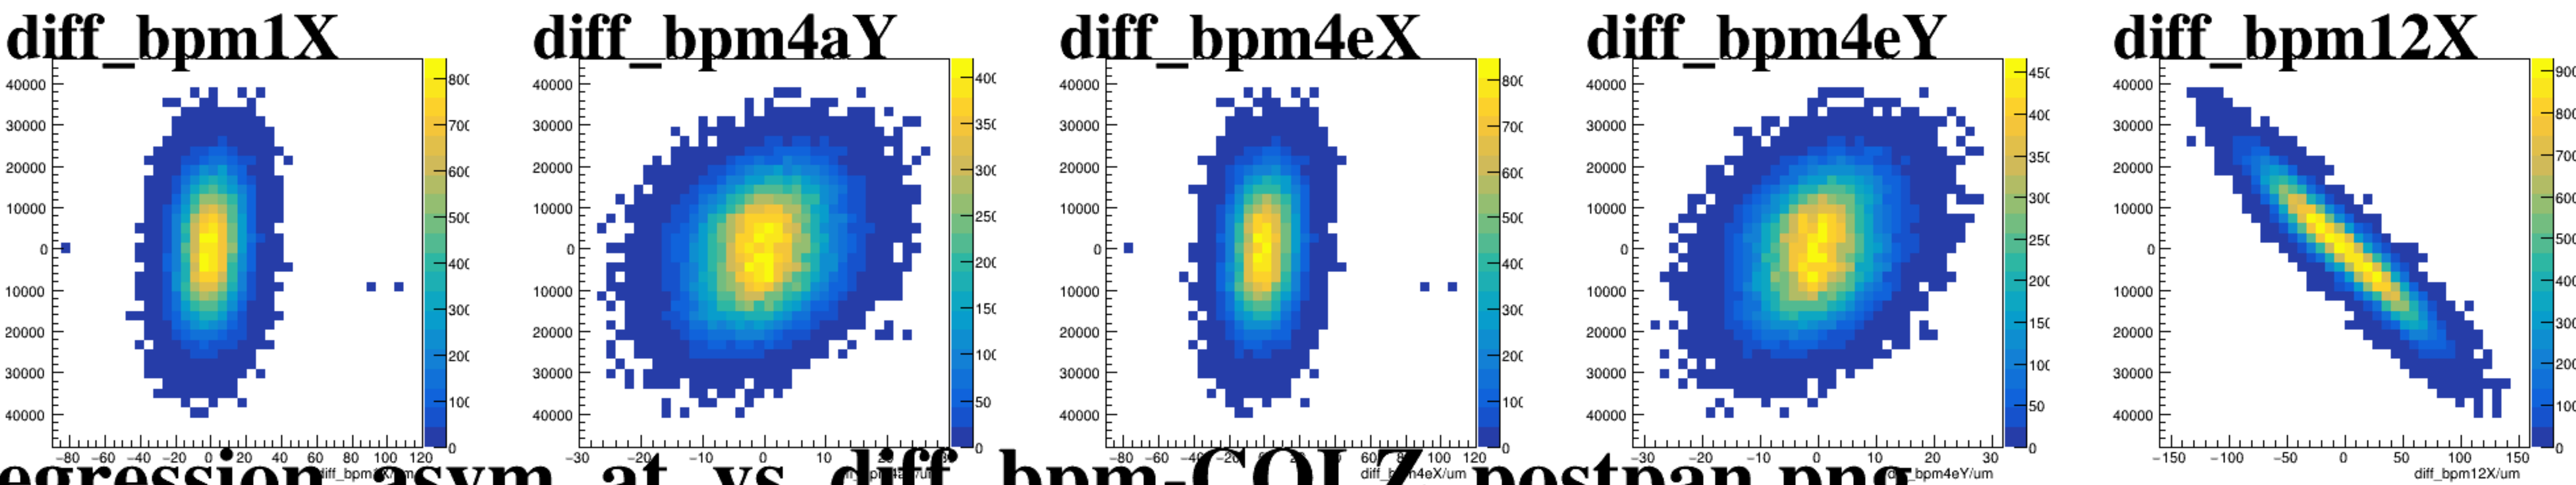


reg_asym_atl1

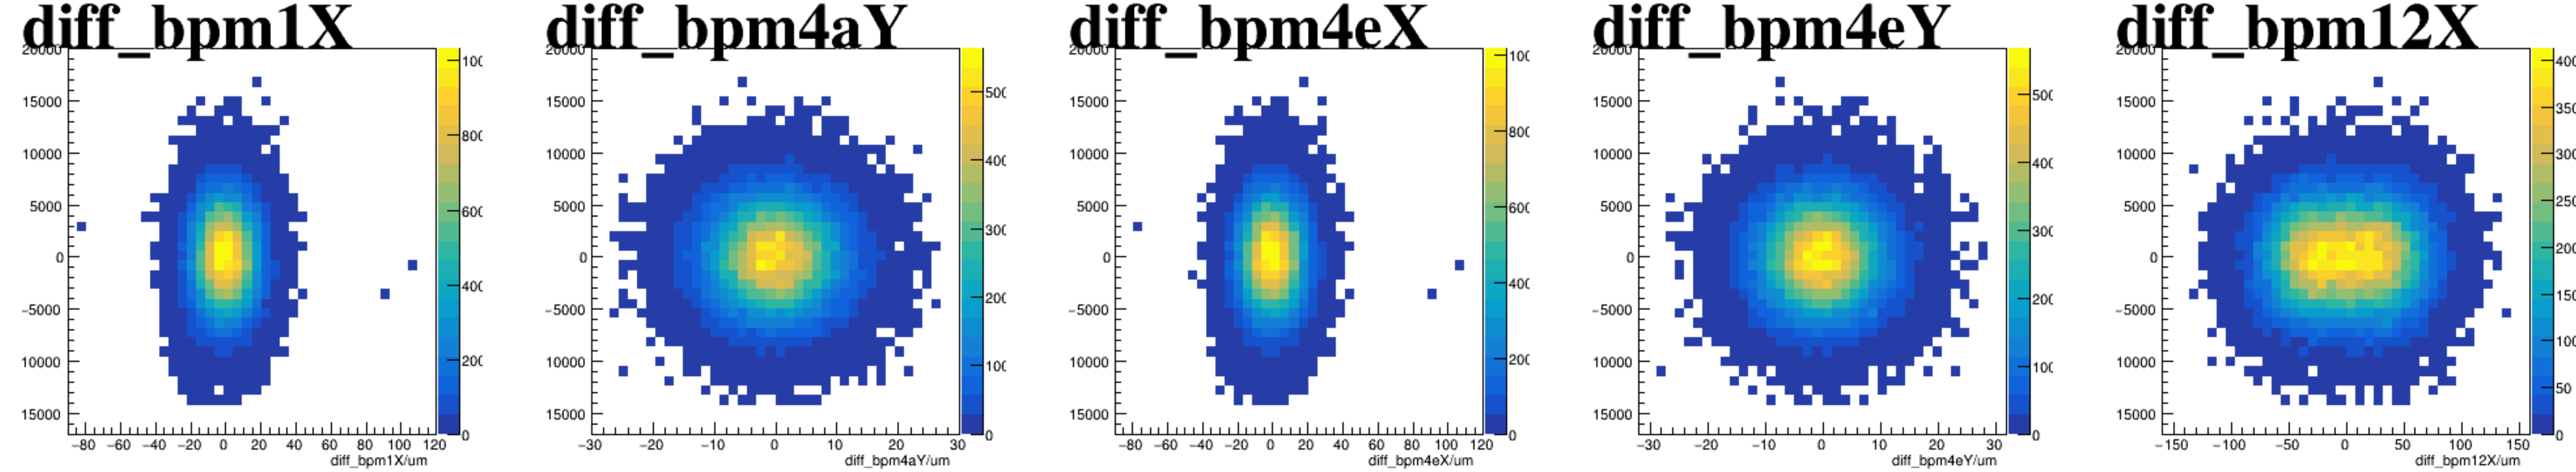


reg_asym_atr1

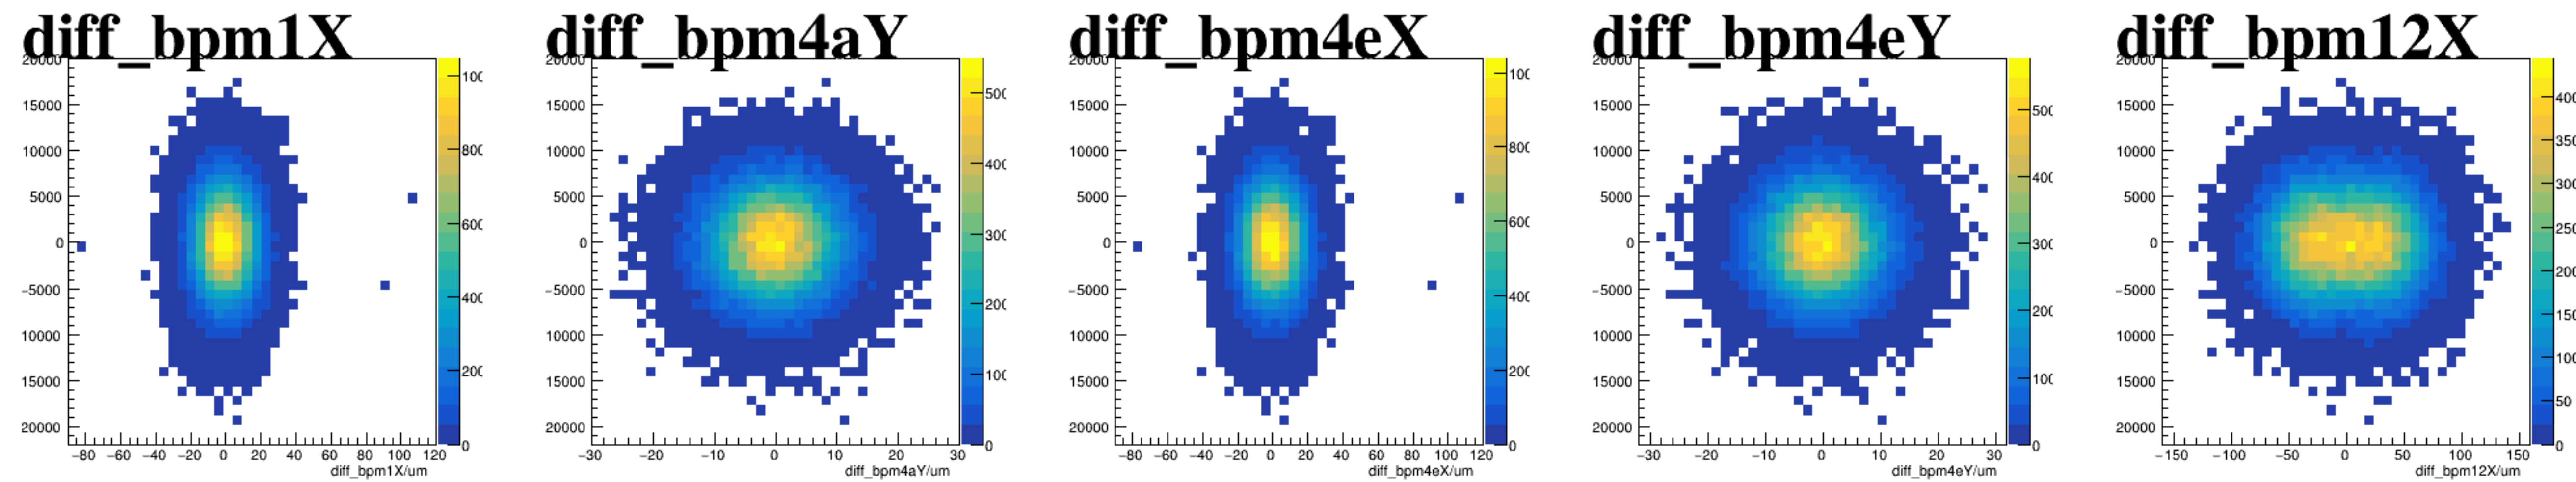






reg_asym_atl2

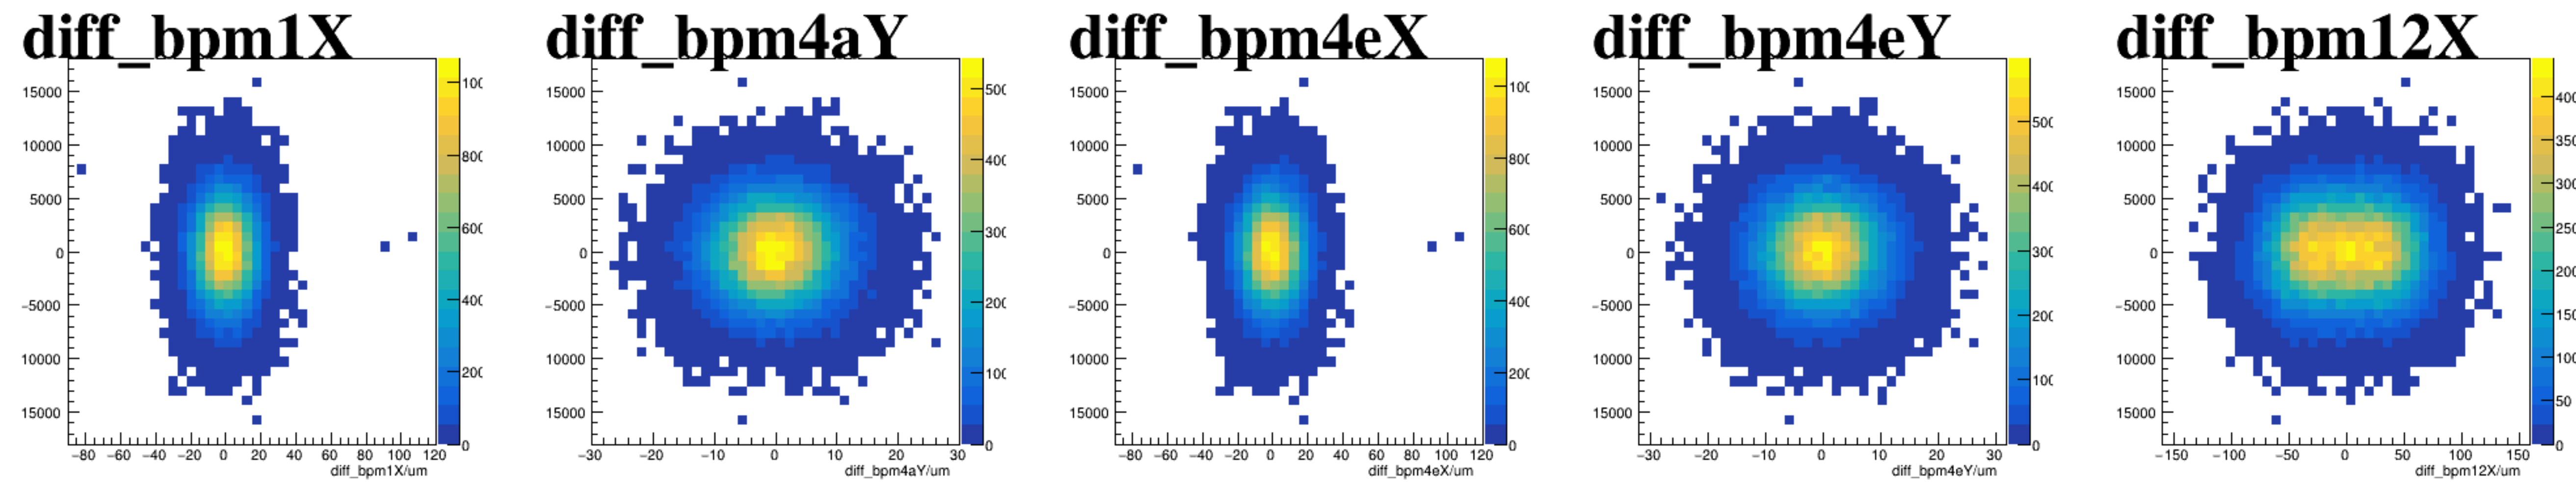






reg_asym_atr2

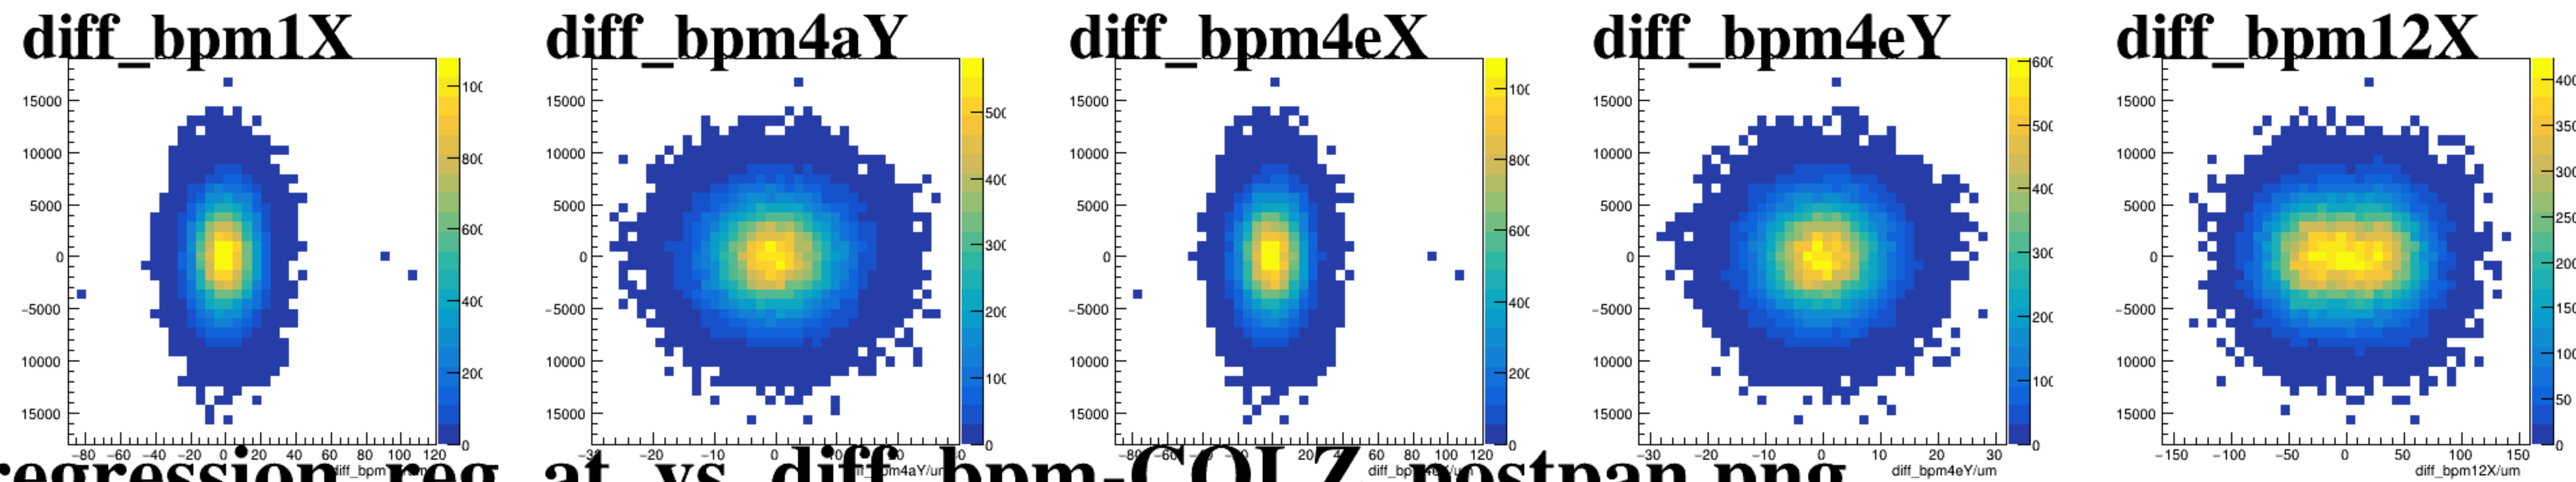






asym_atl1

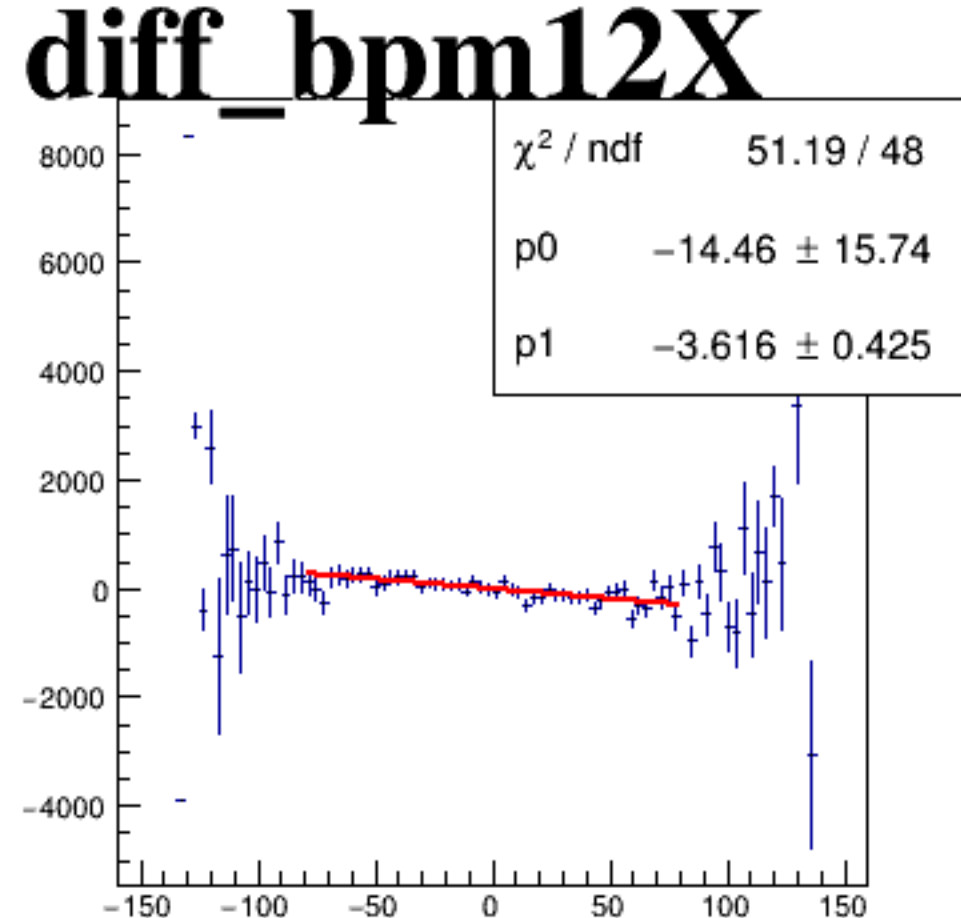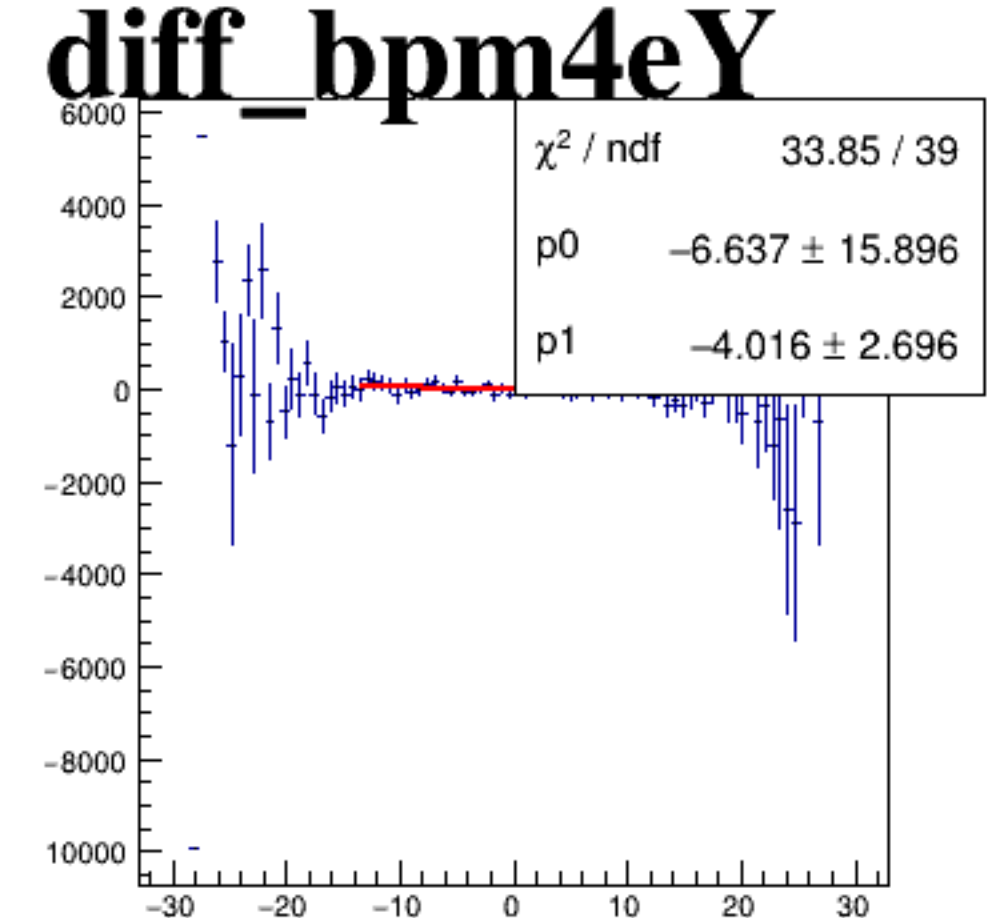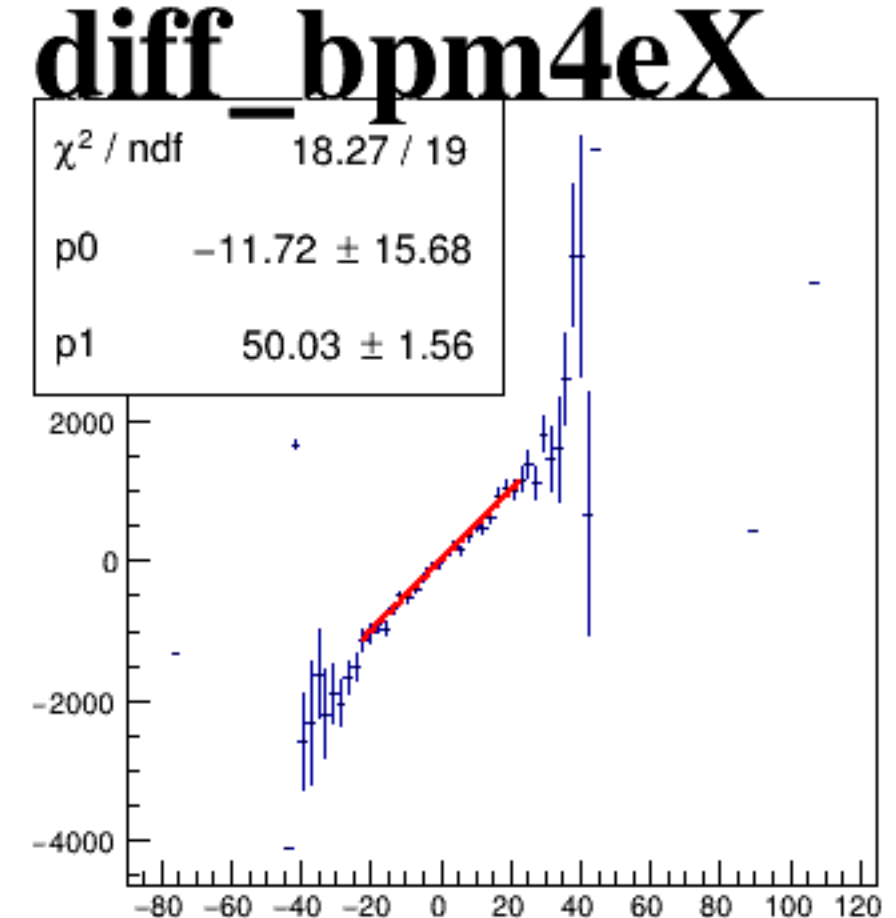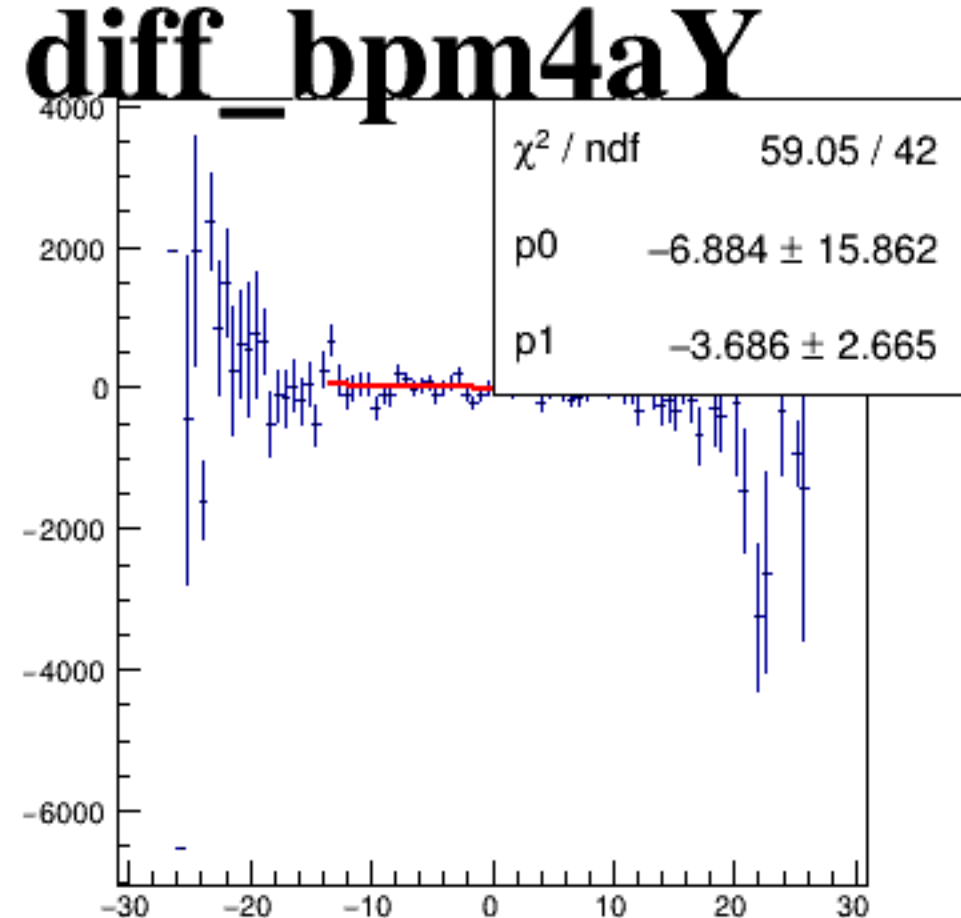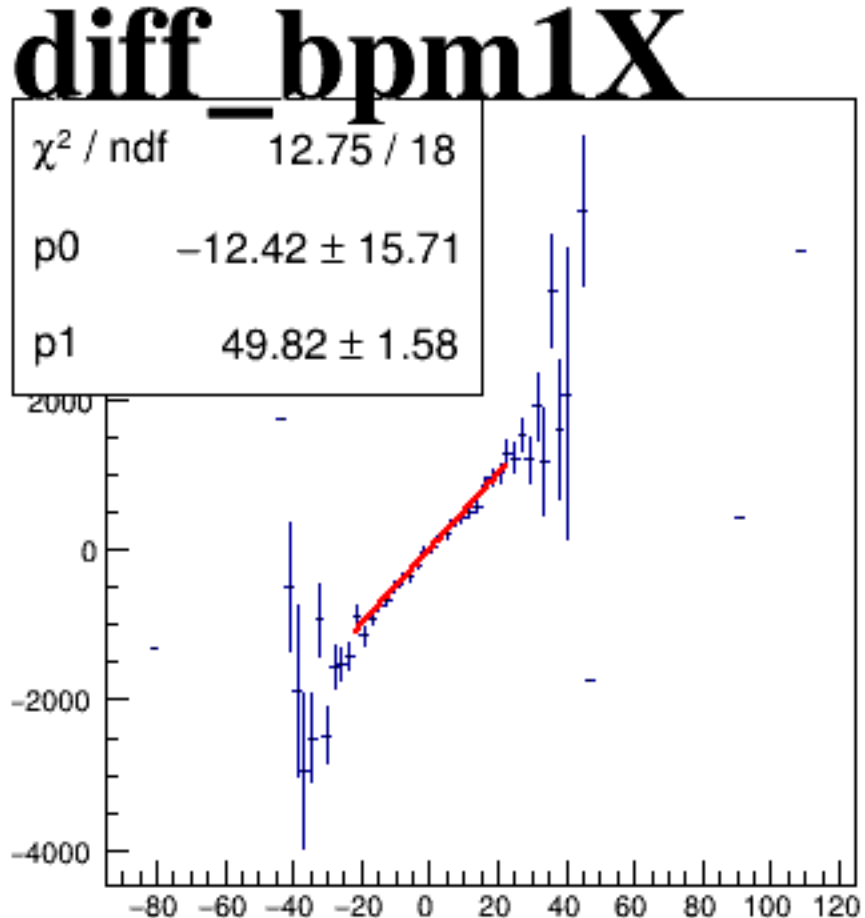






asym_atr1

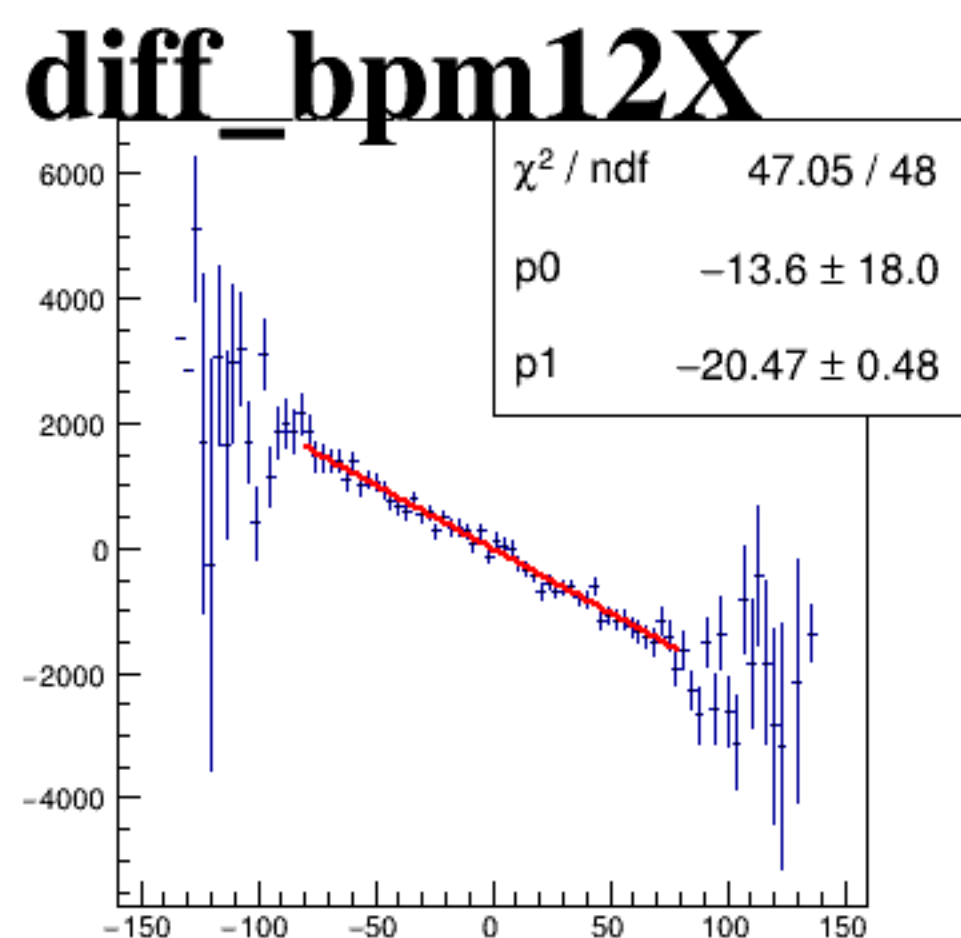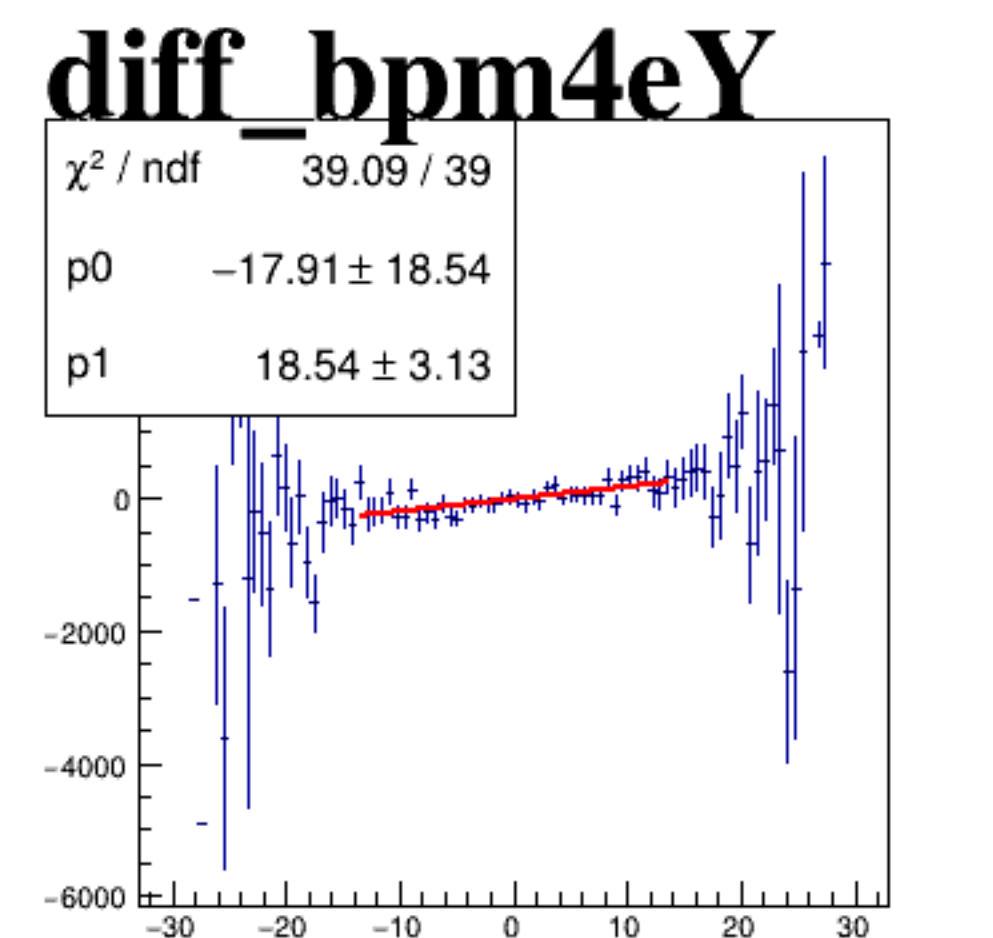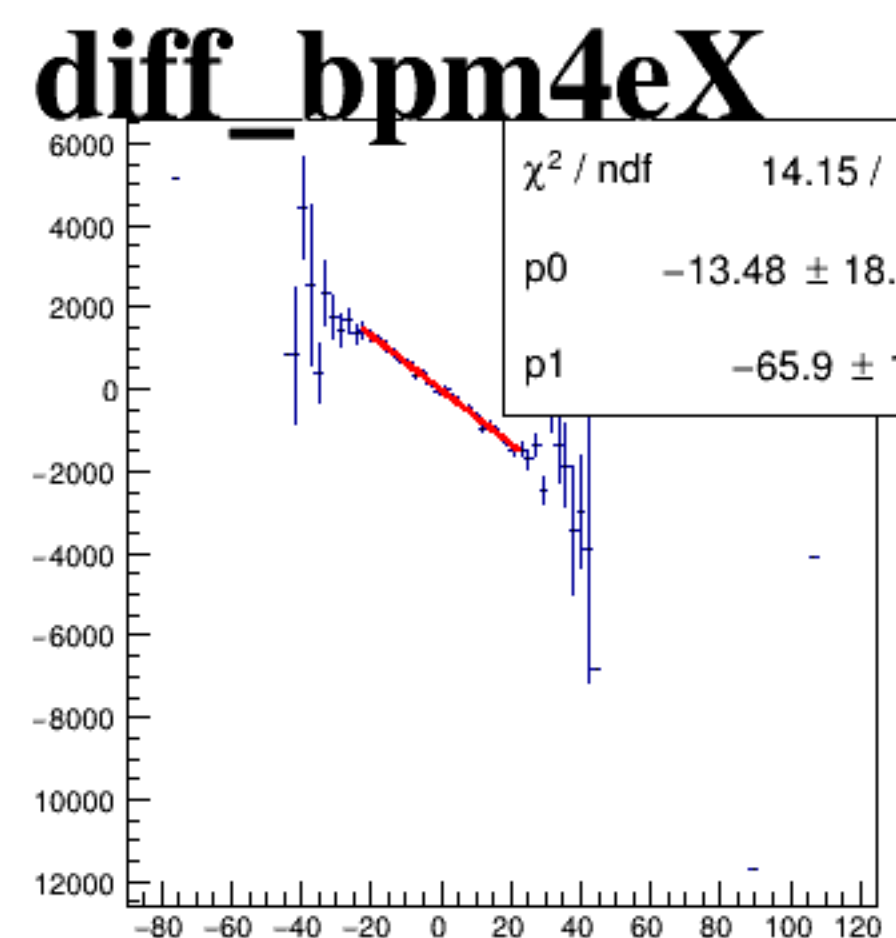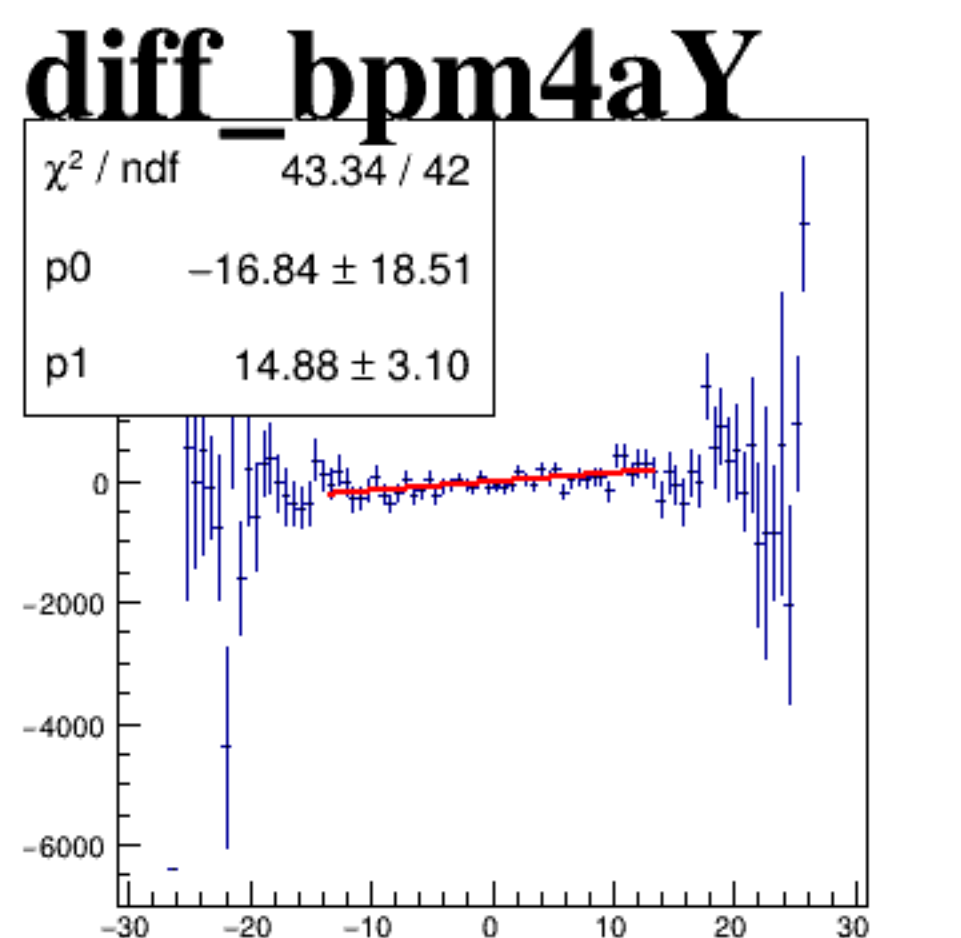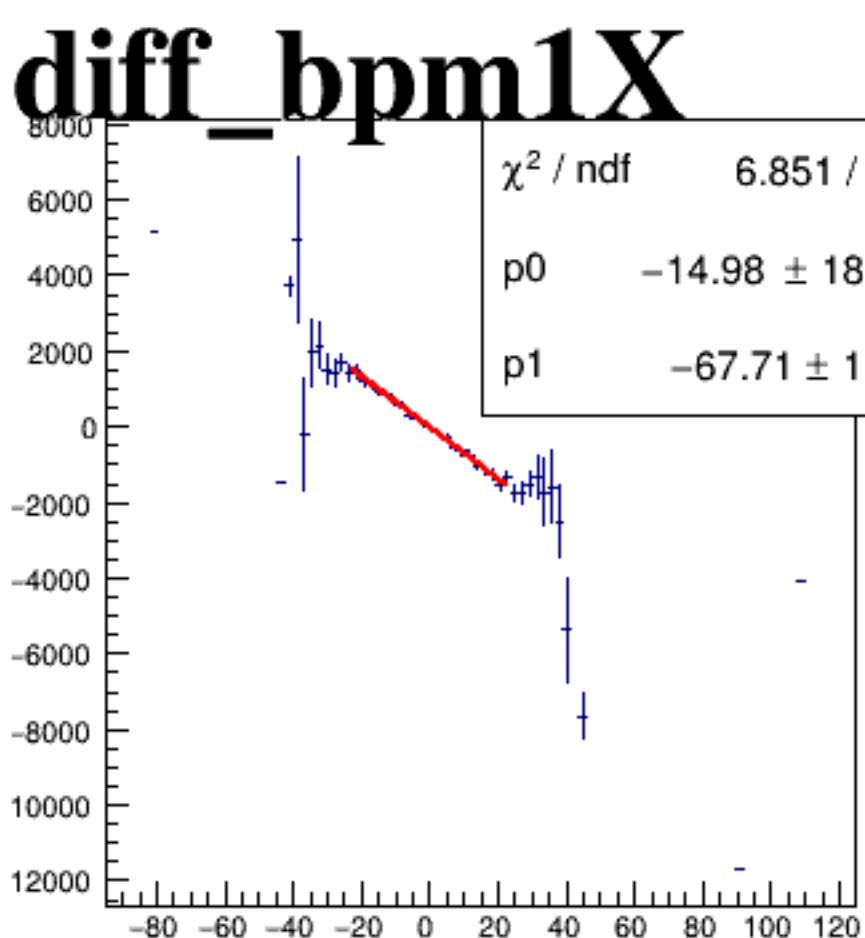






asym_atl2

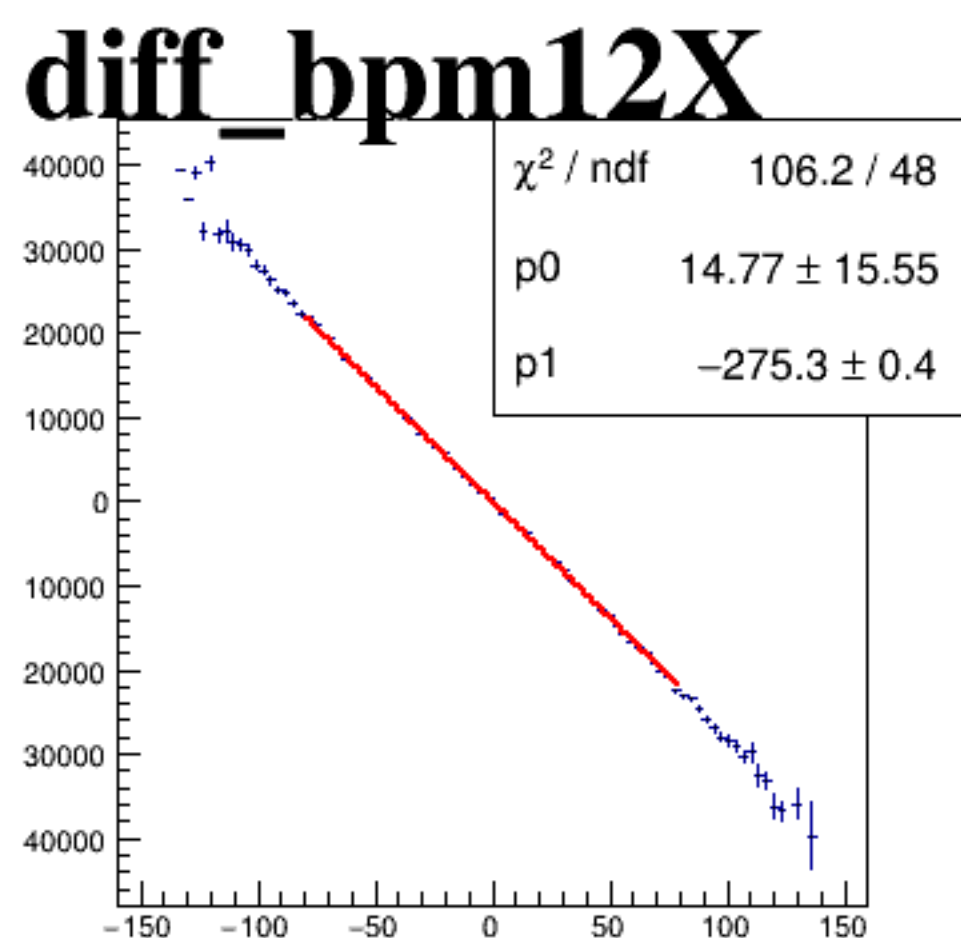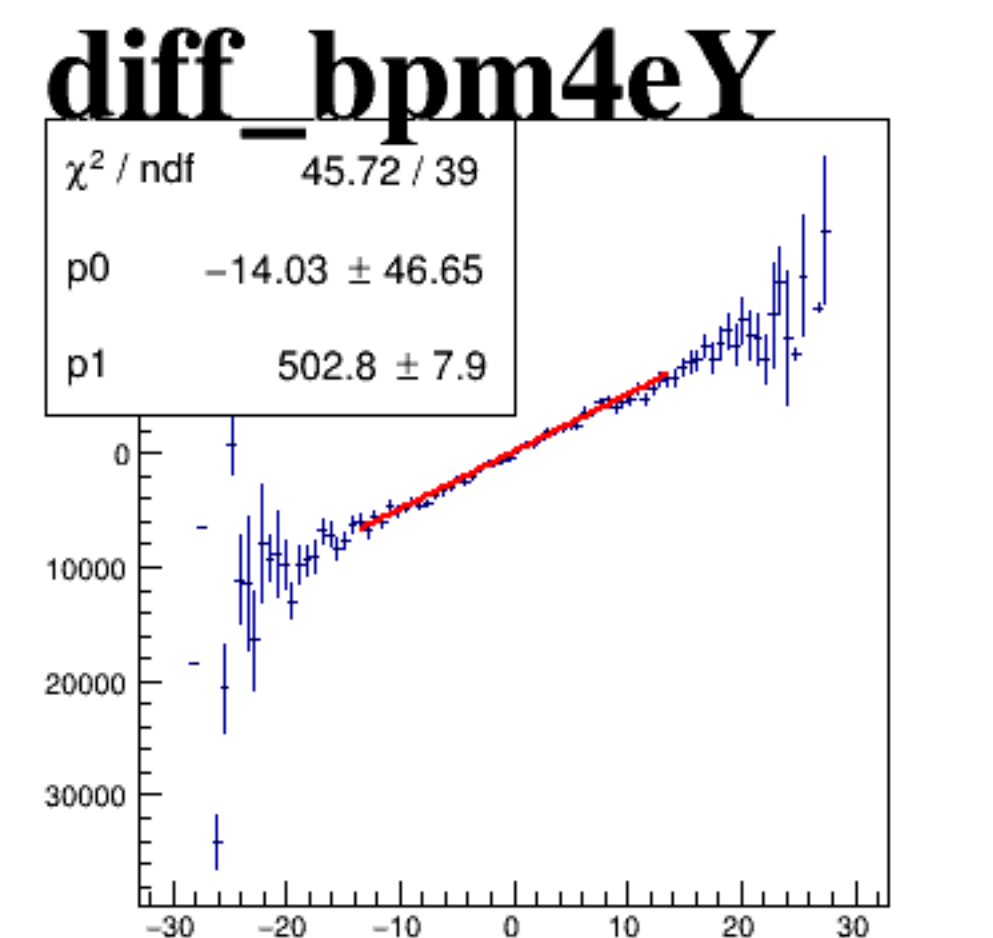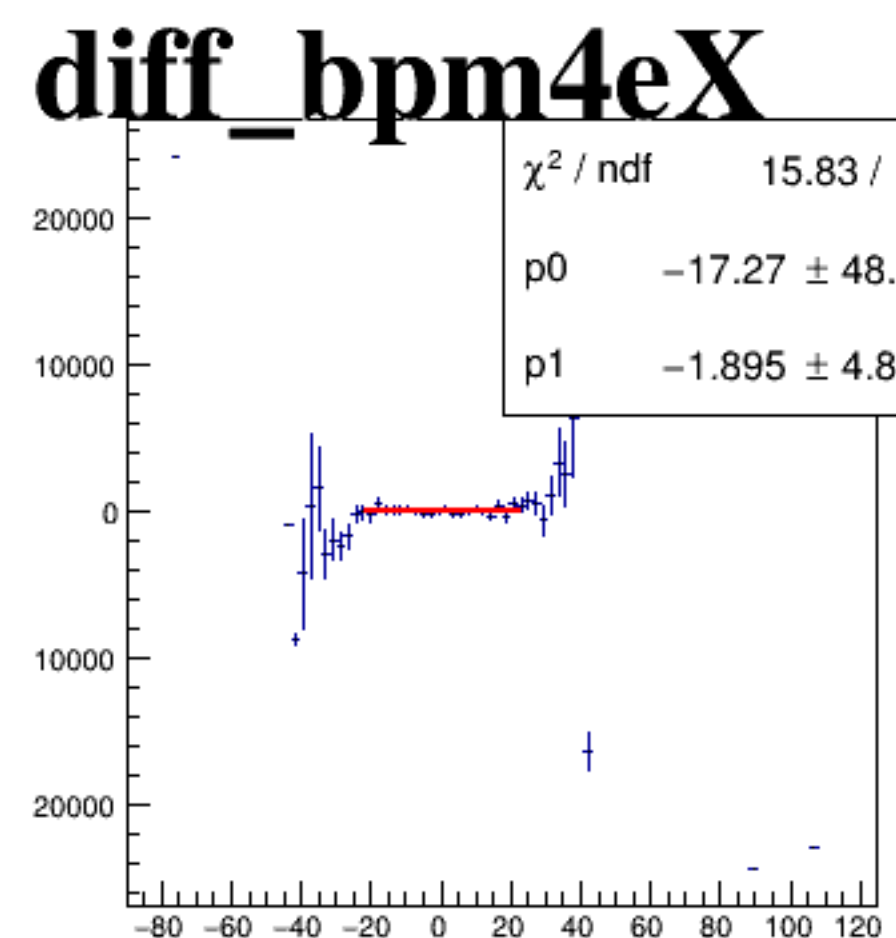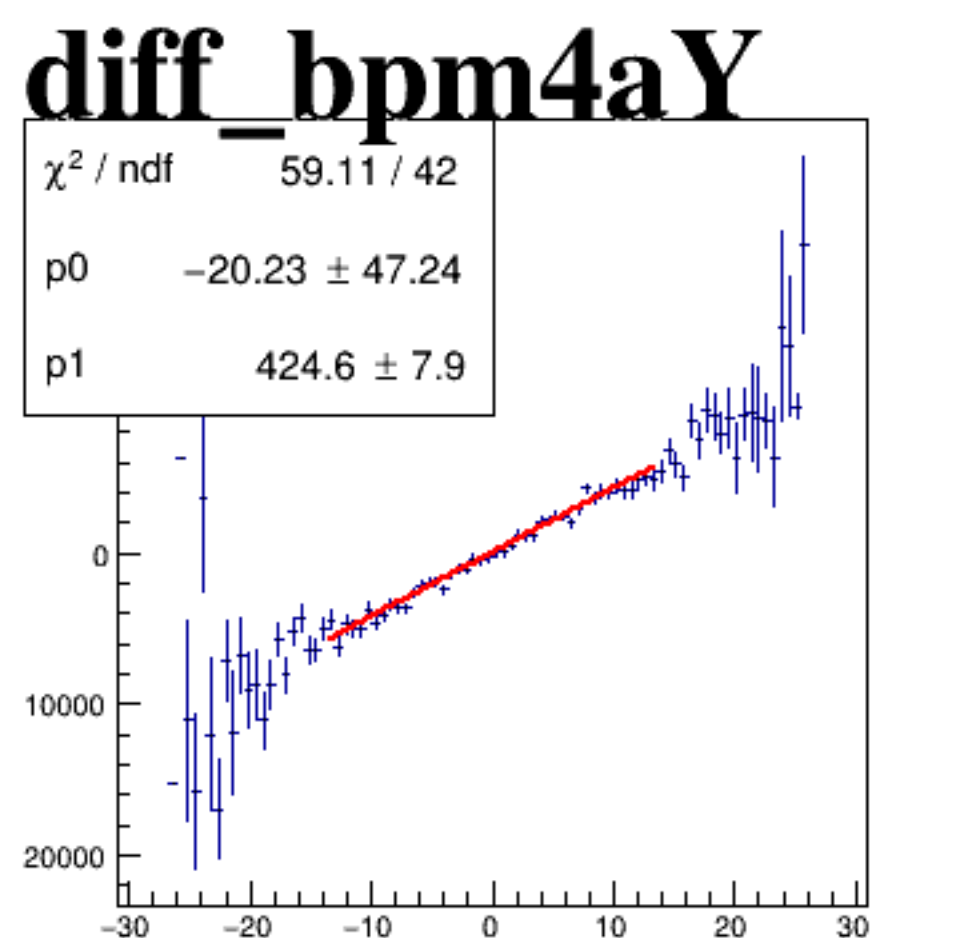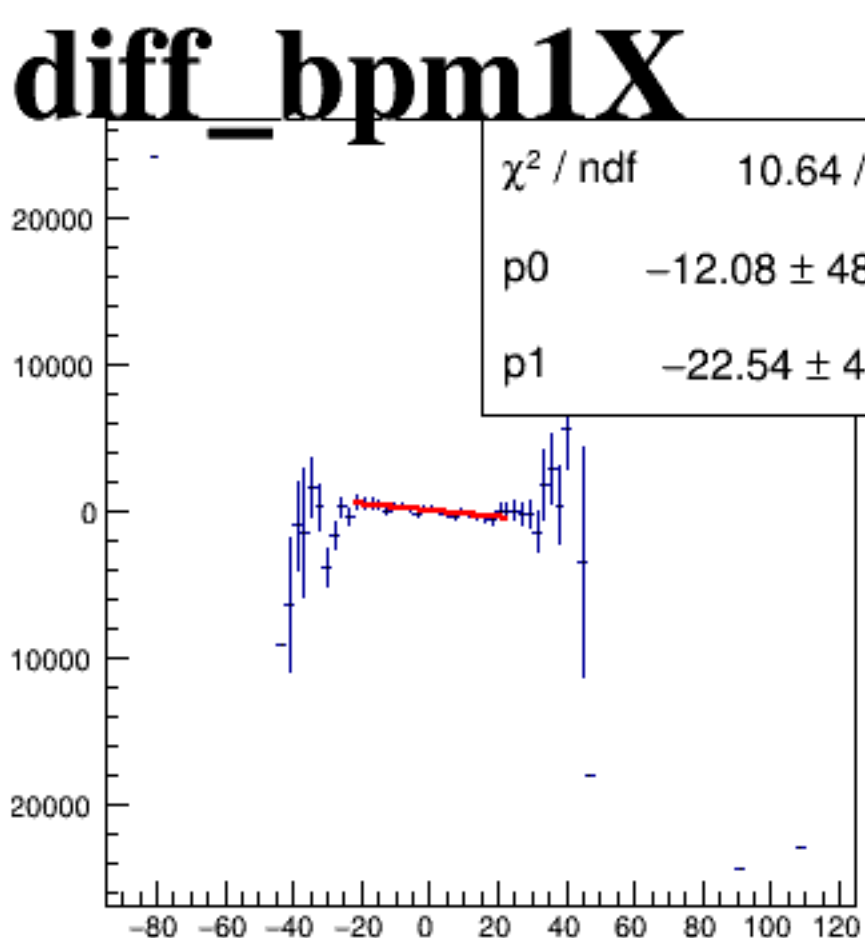






asym_atr2

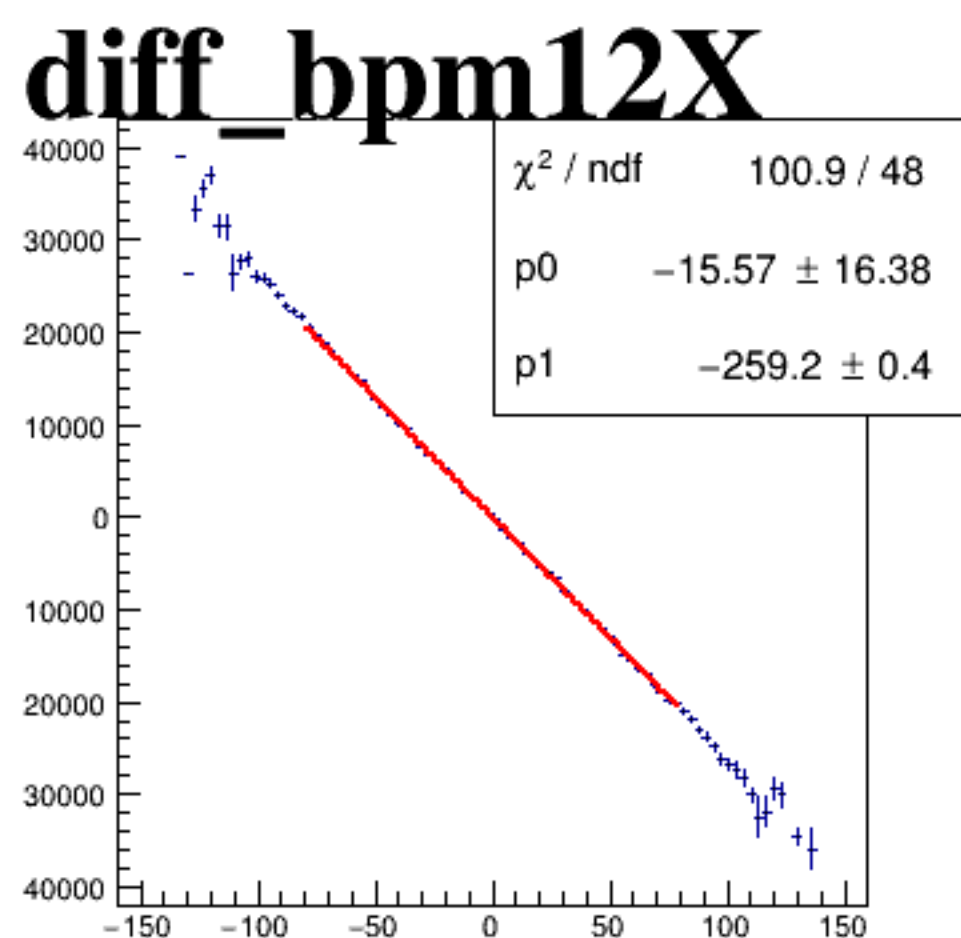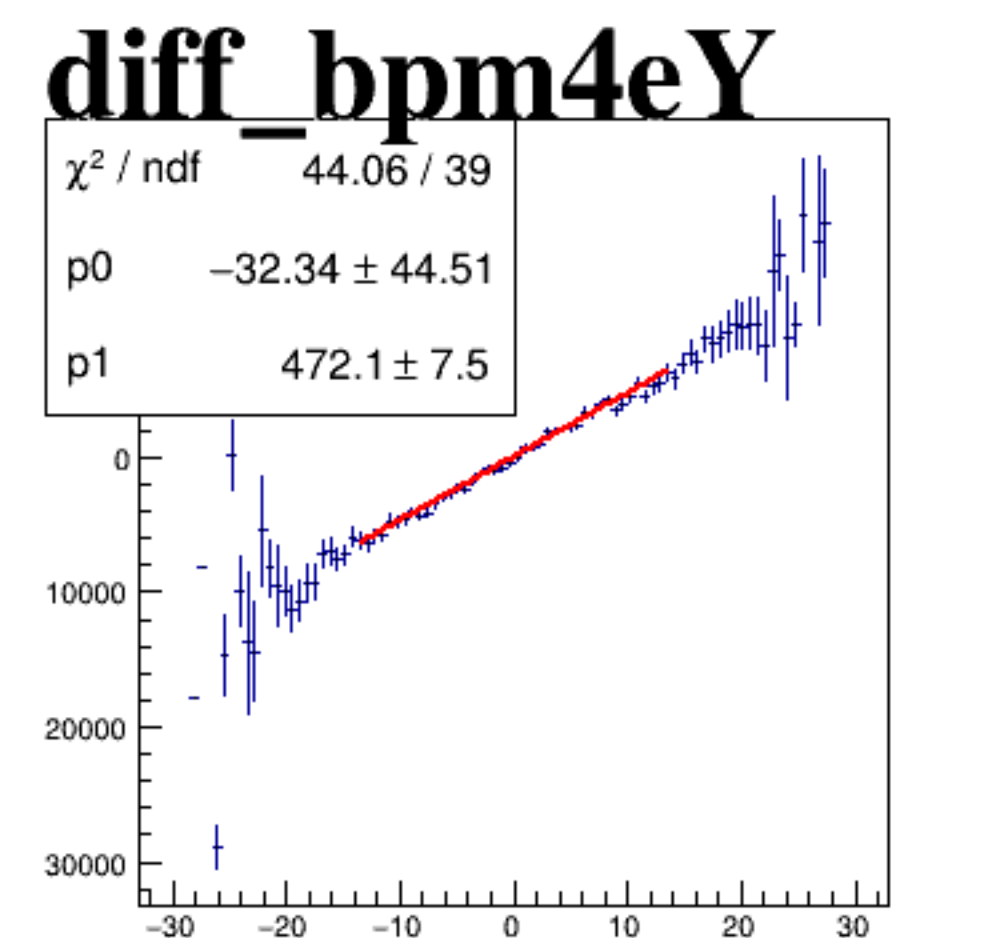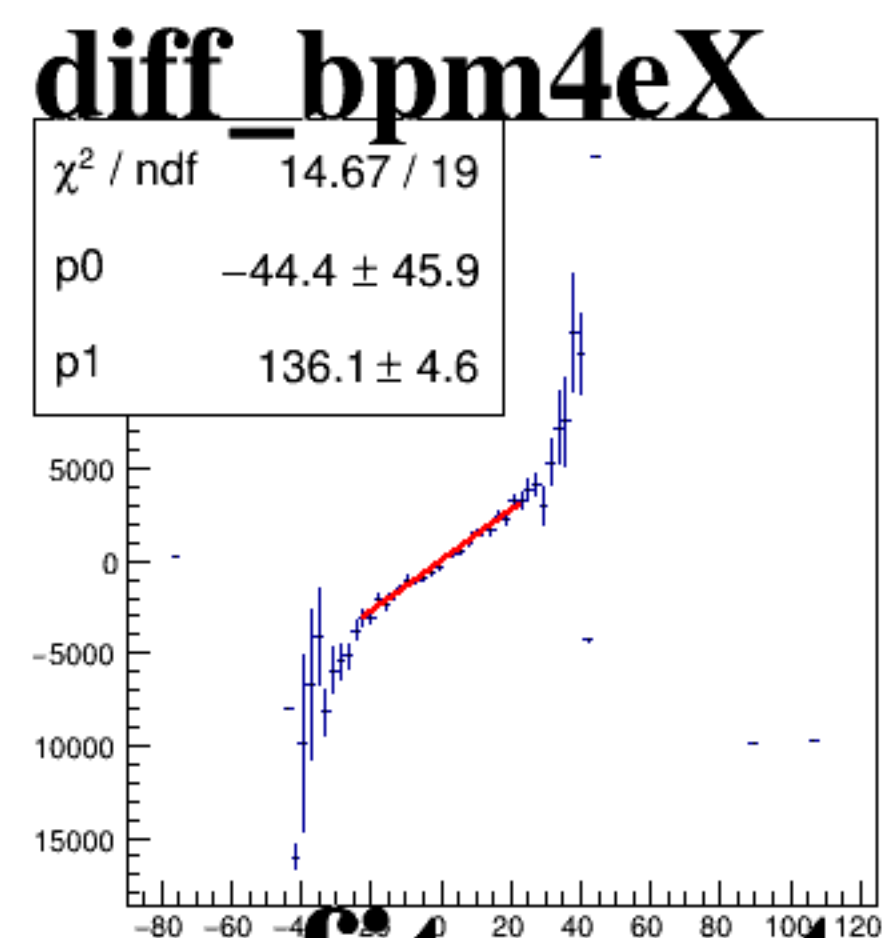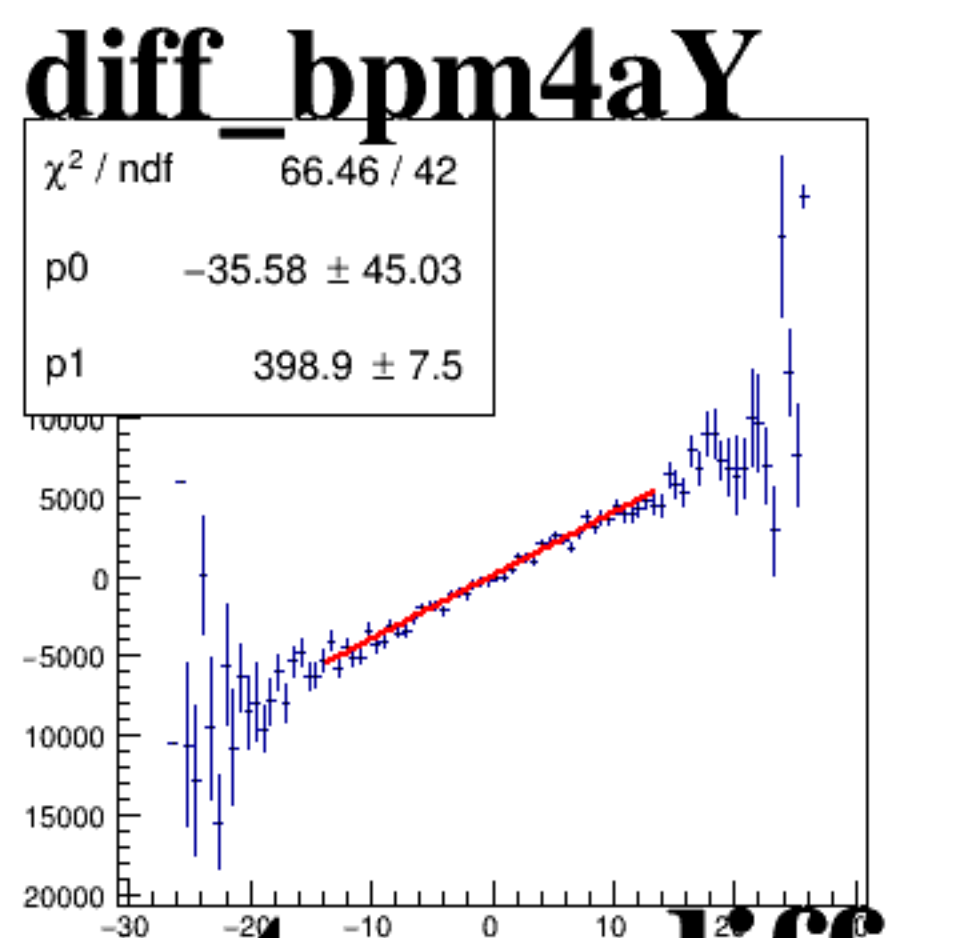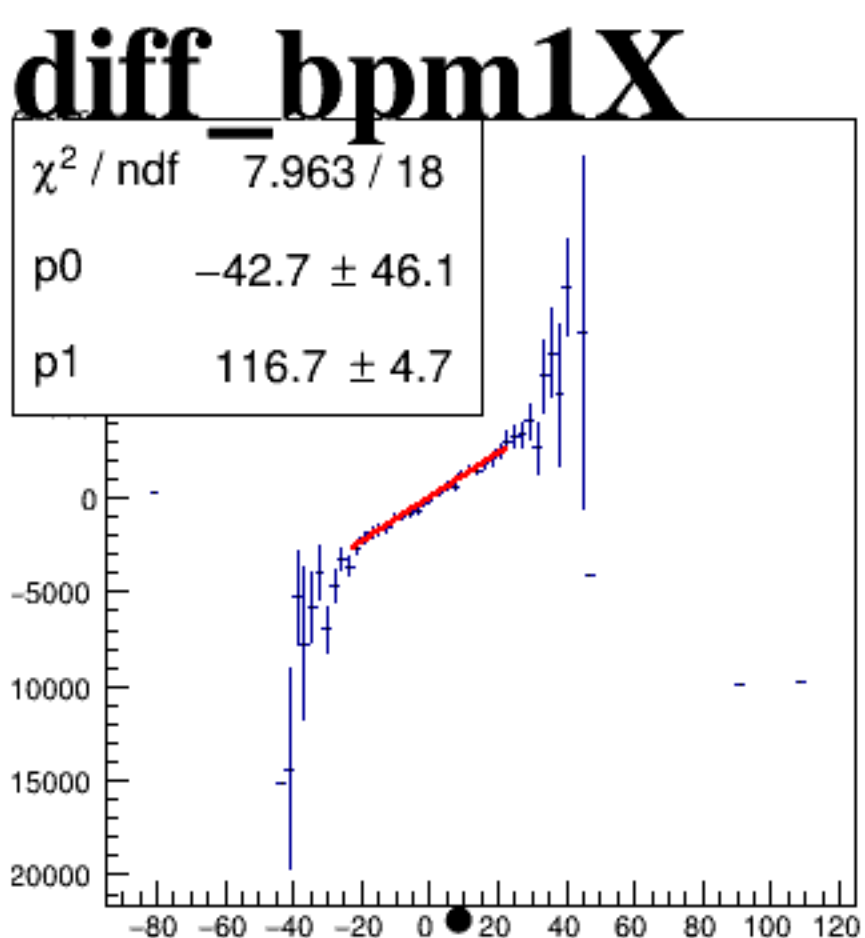






reg_asym_atl1

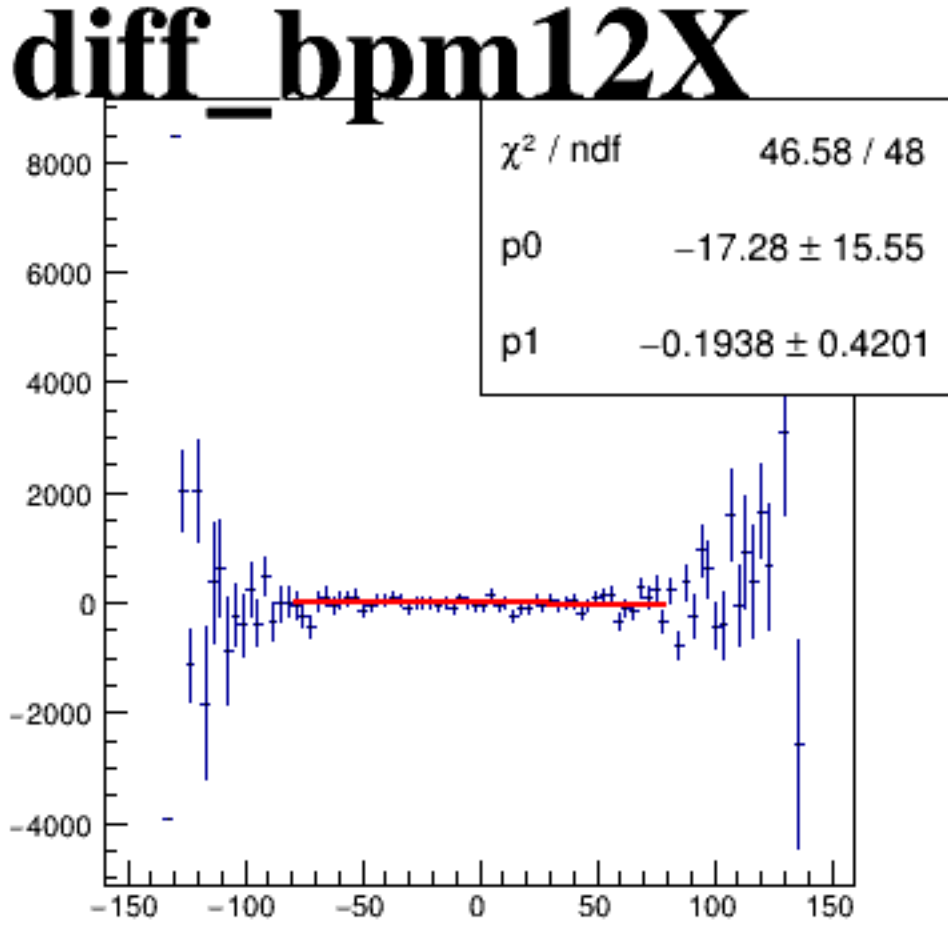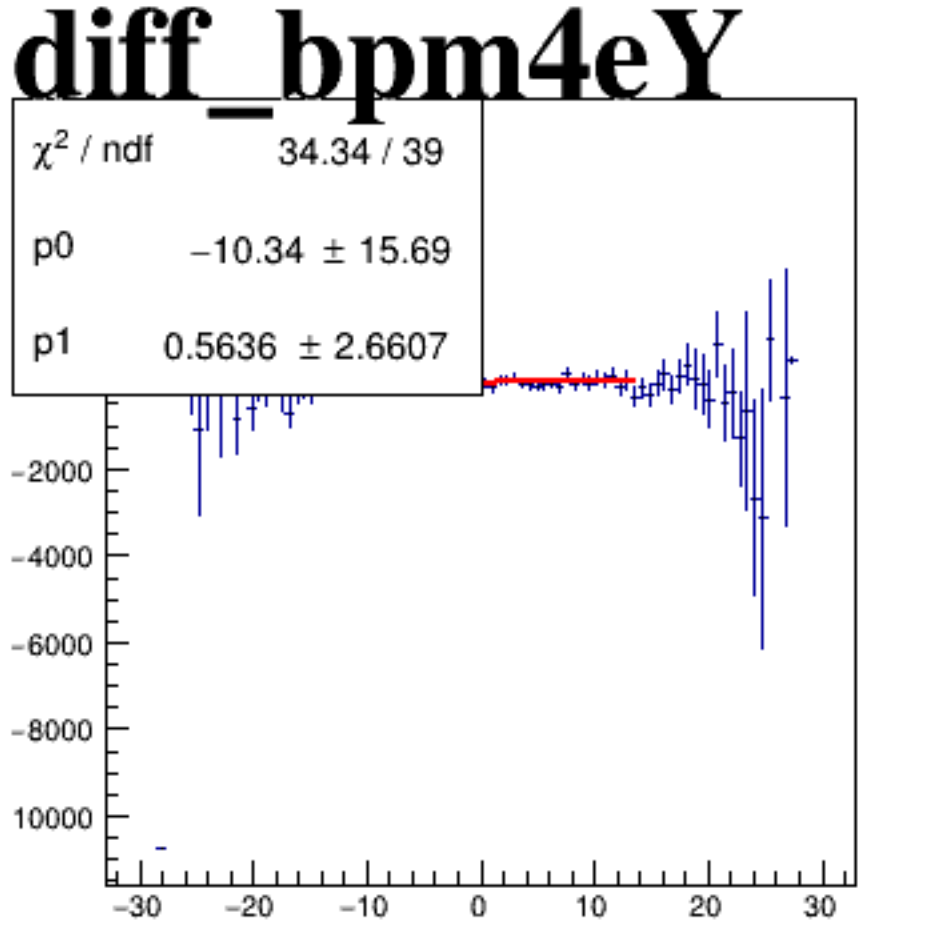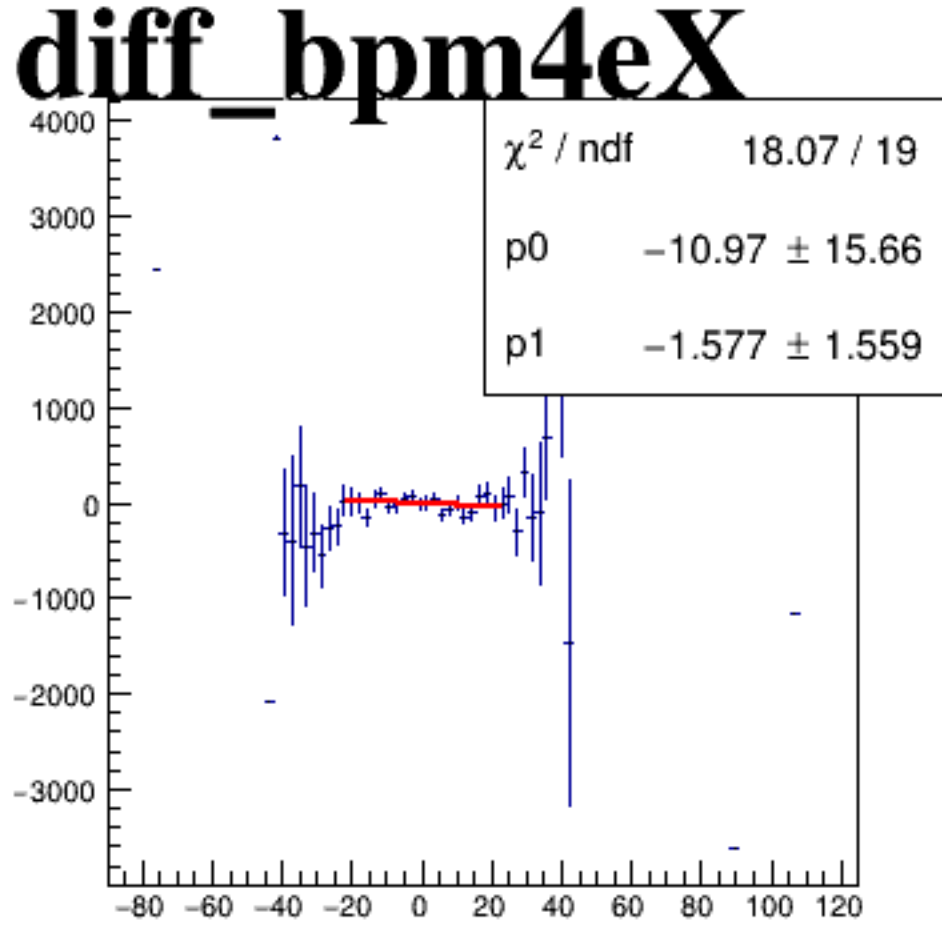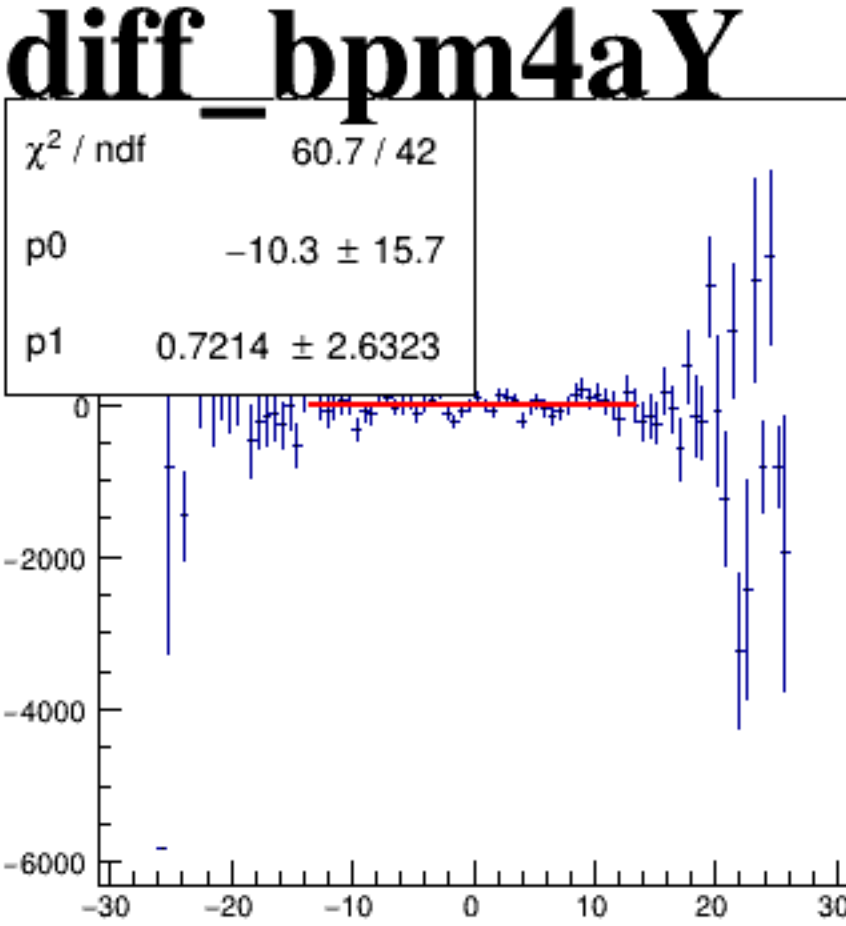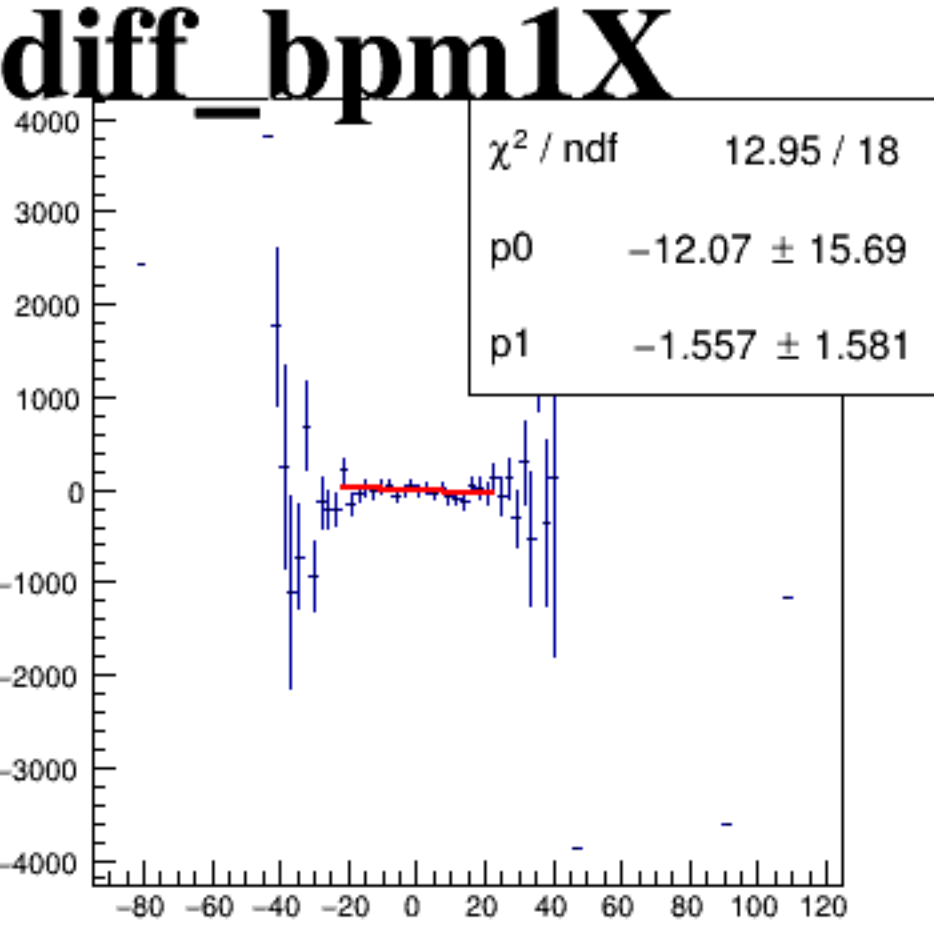






reg_asym_atr1

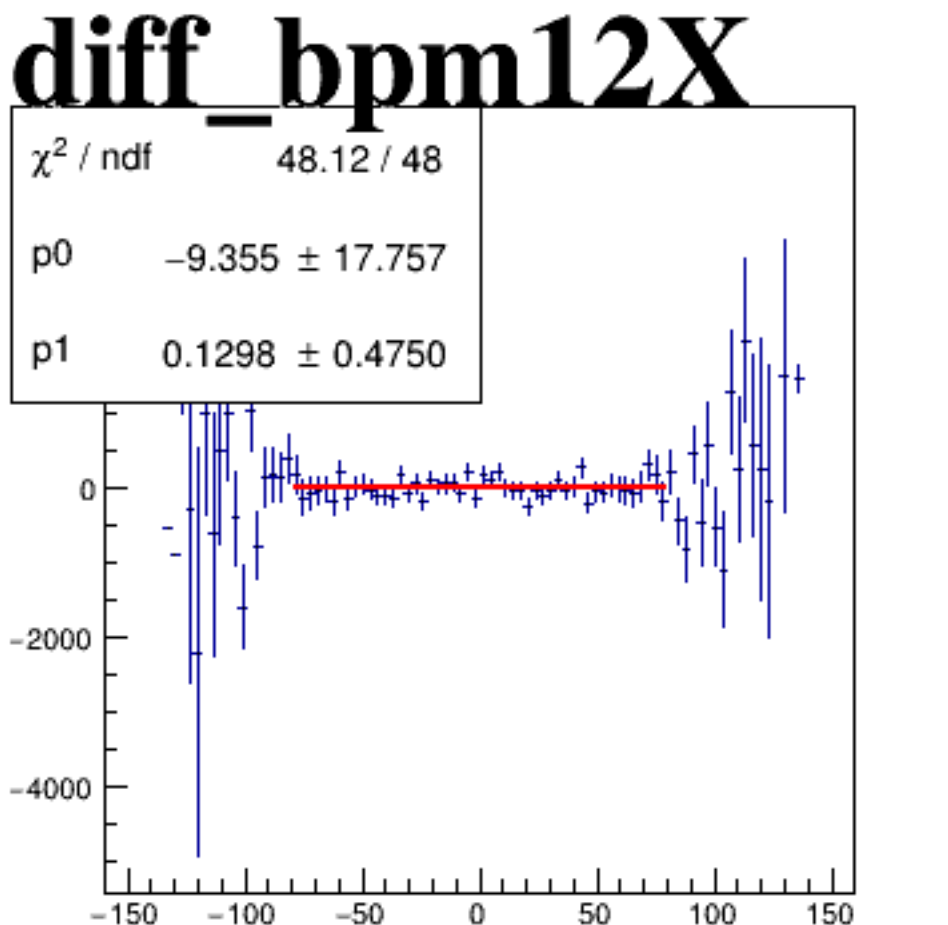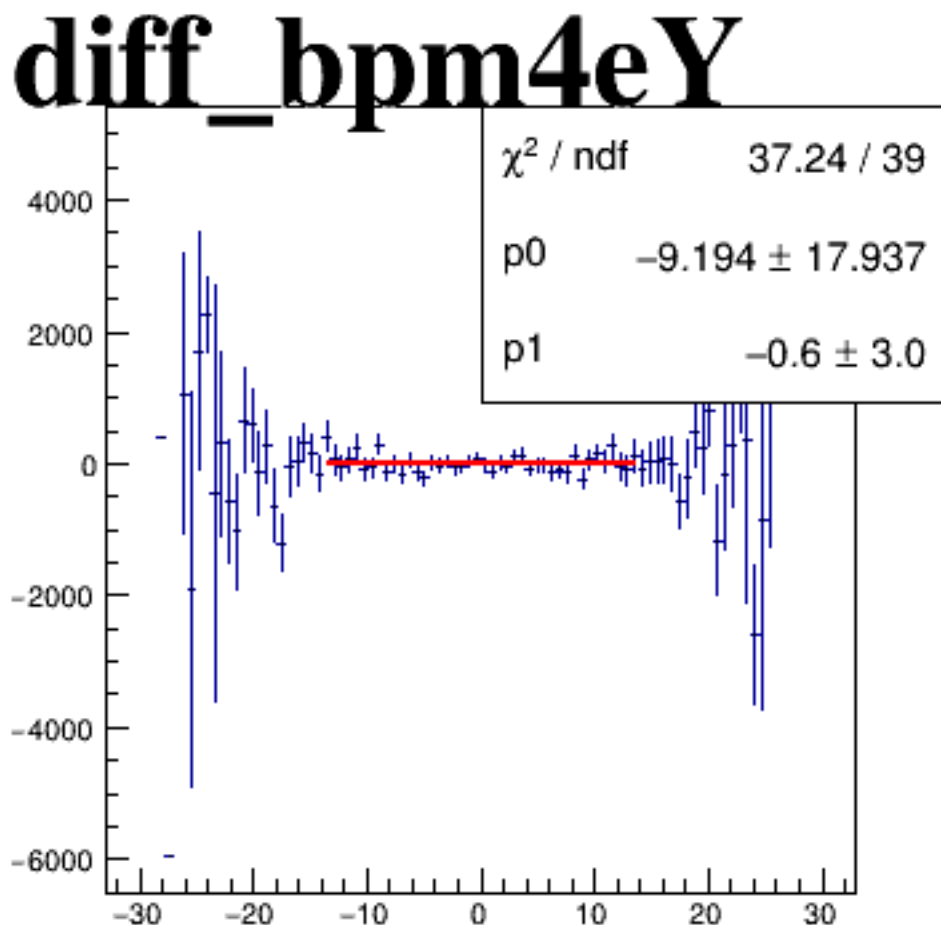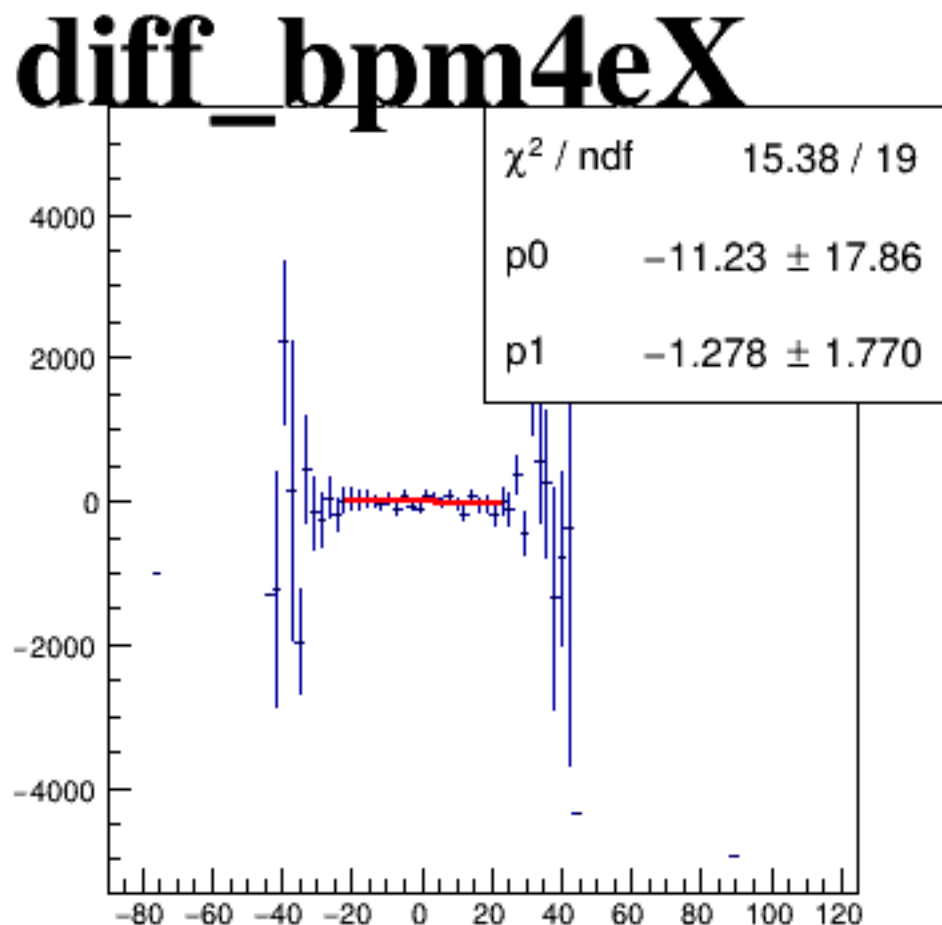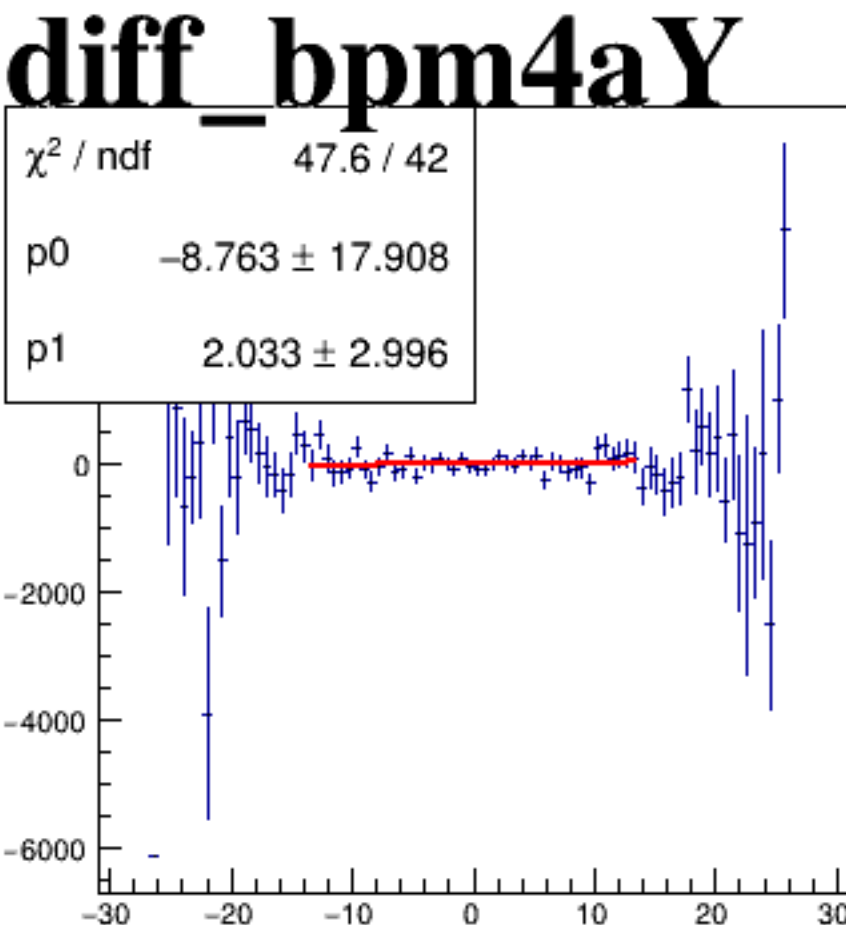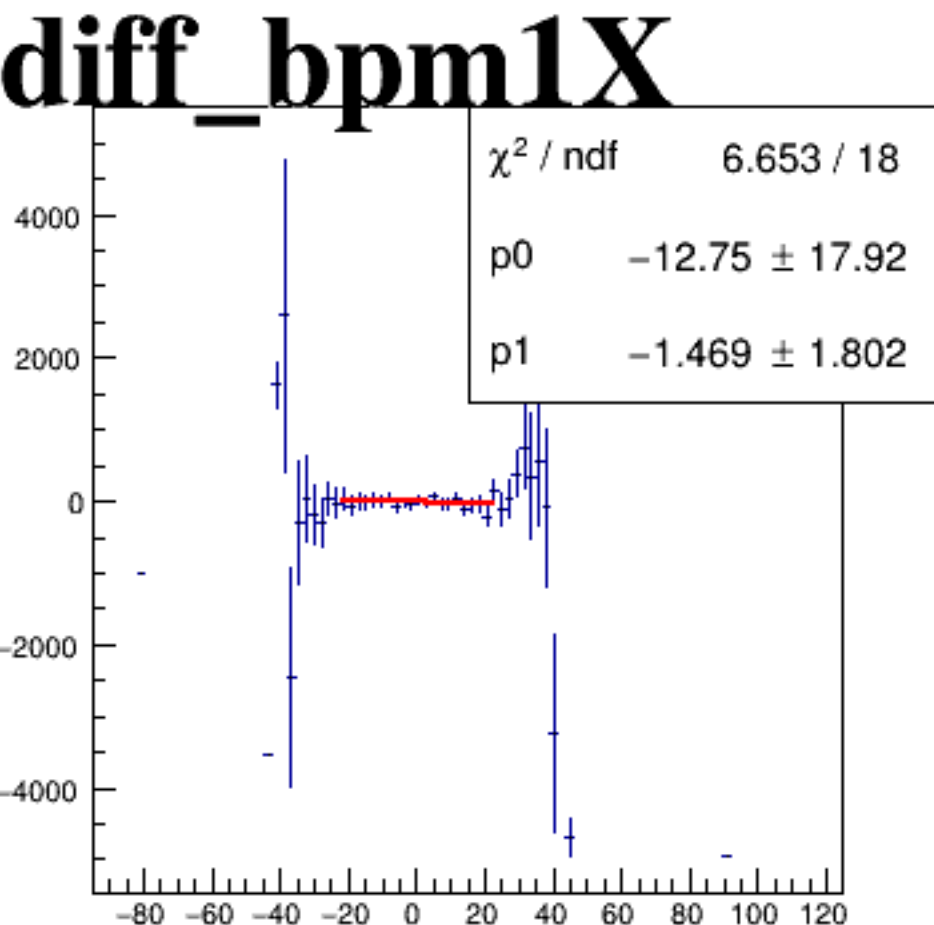






reg_asym_atl2

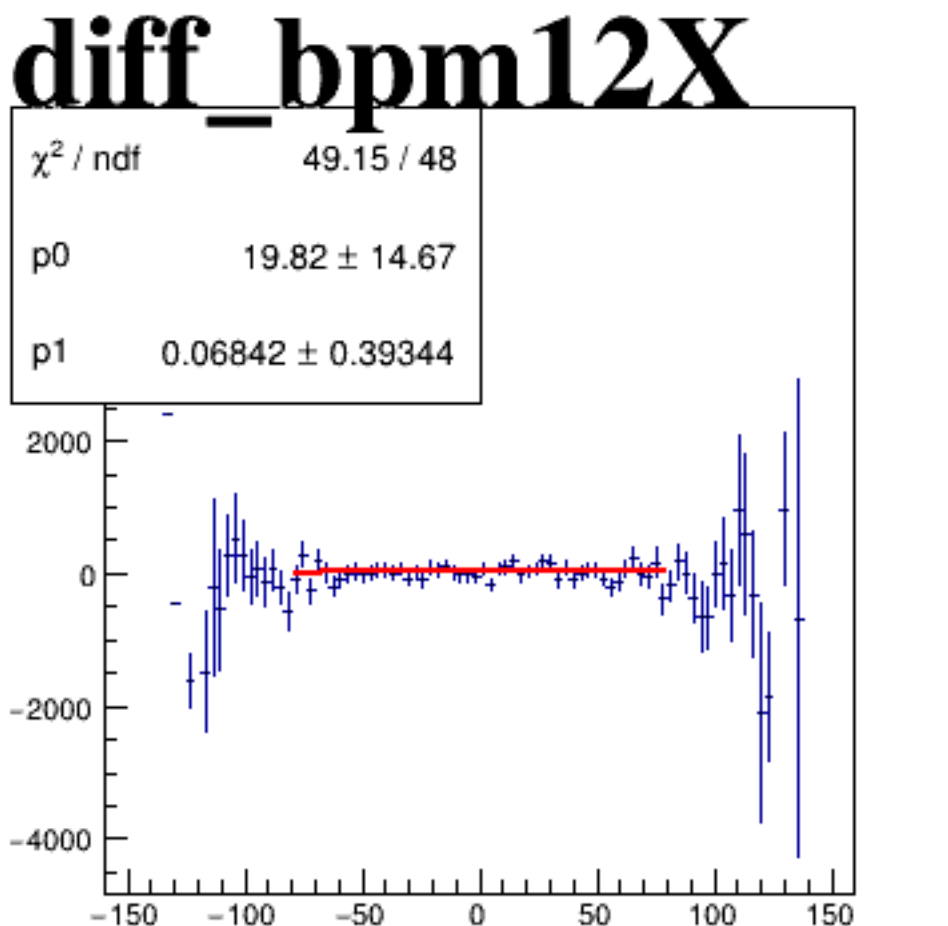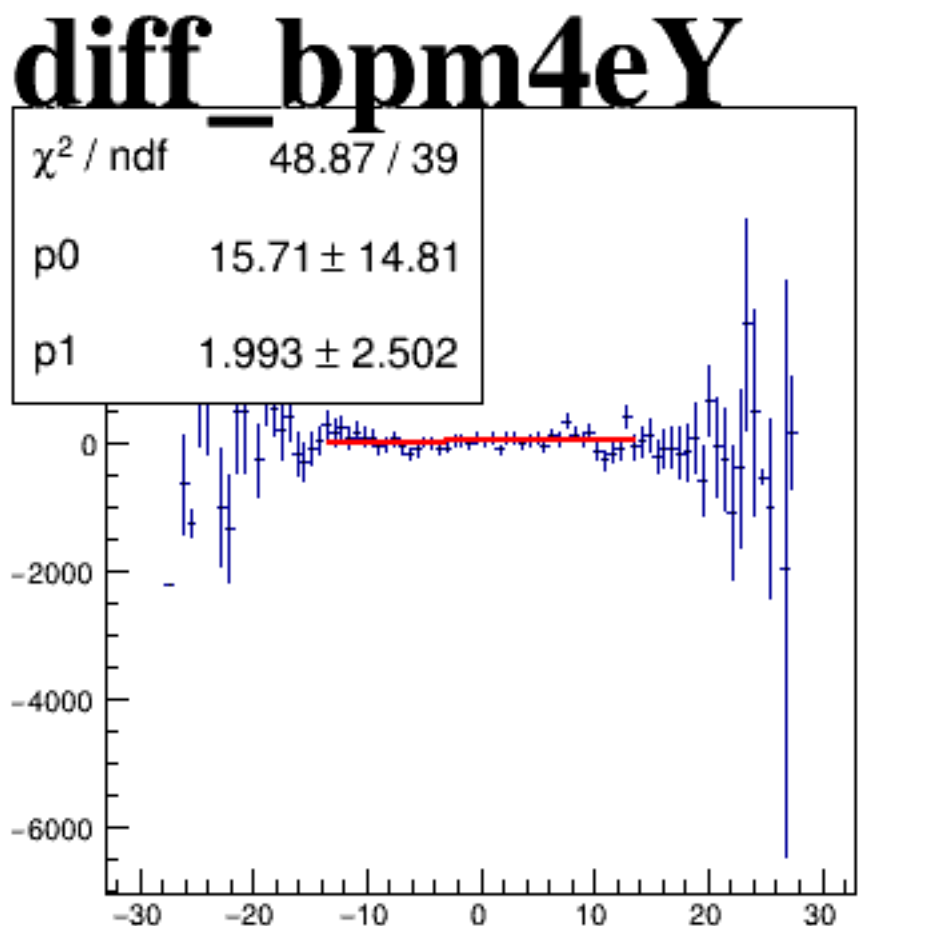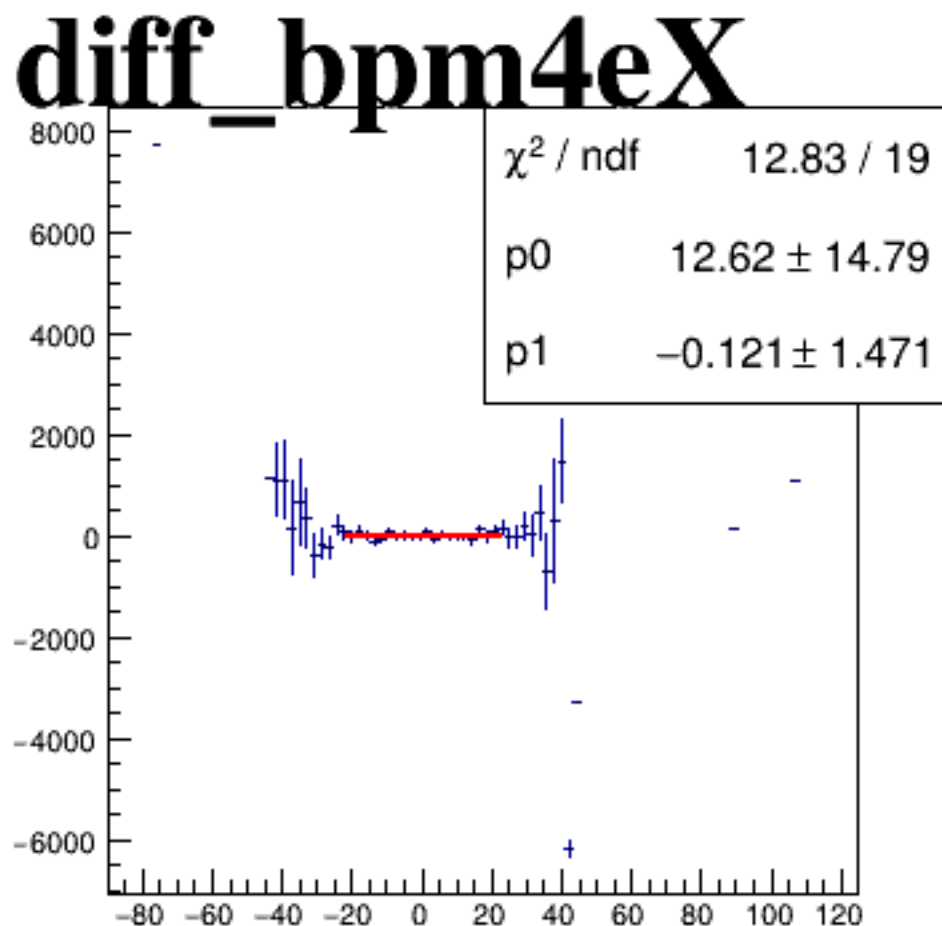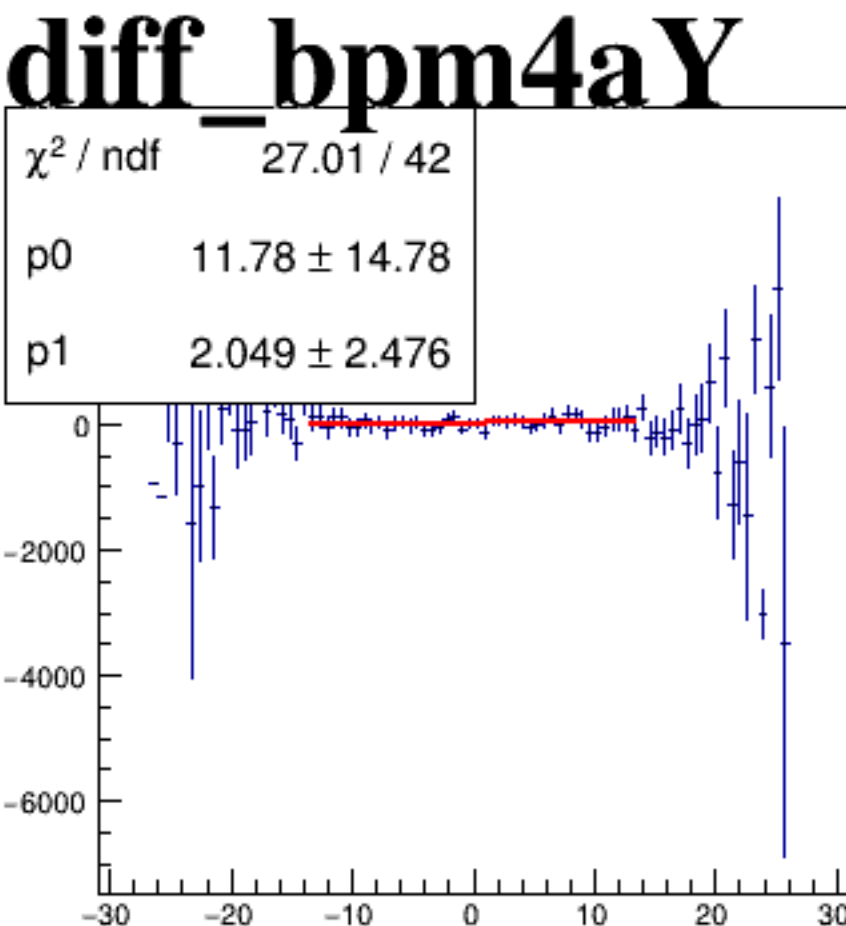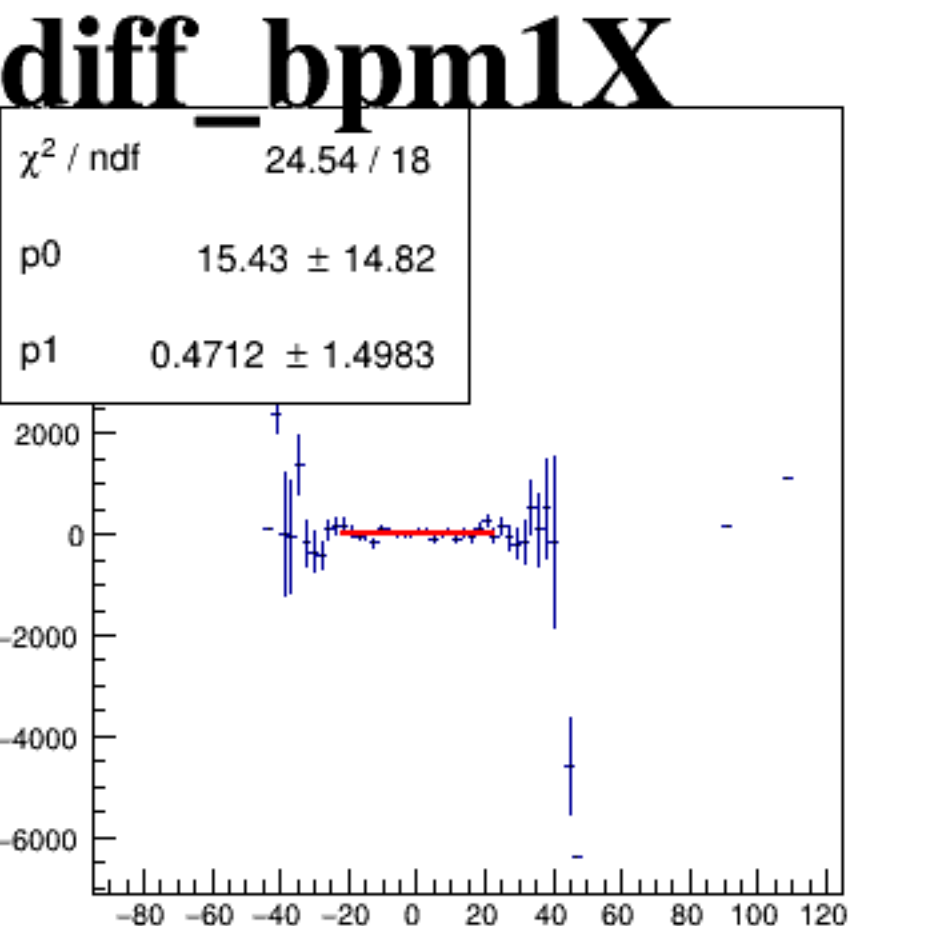






reg_asym_atr2

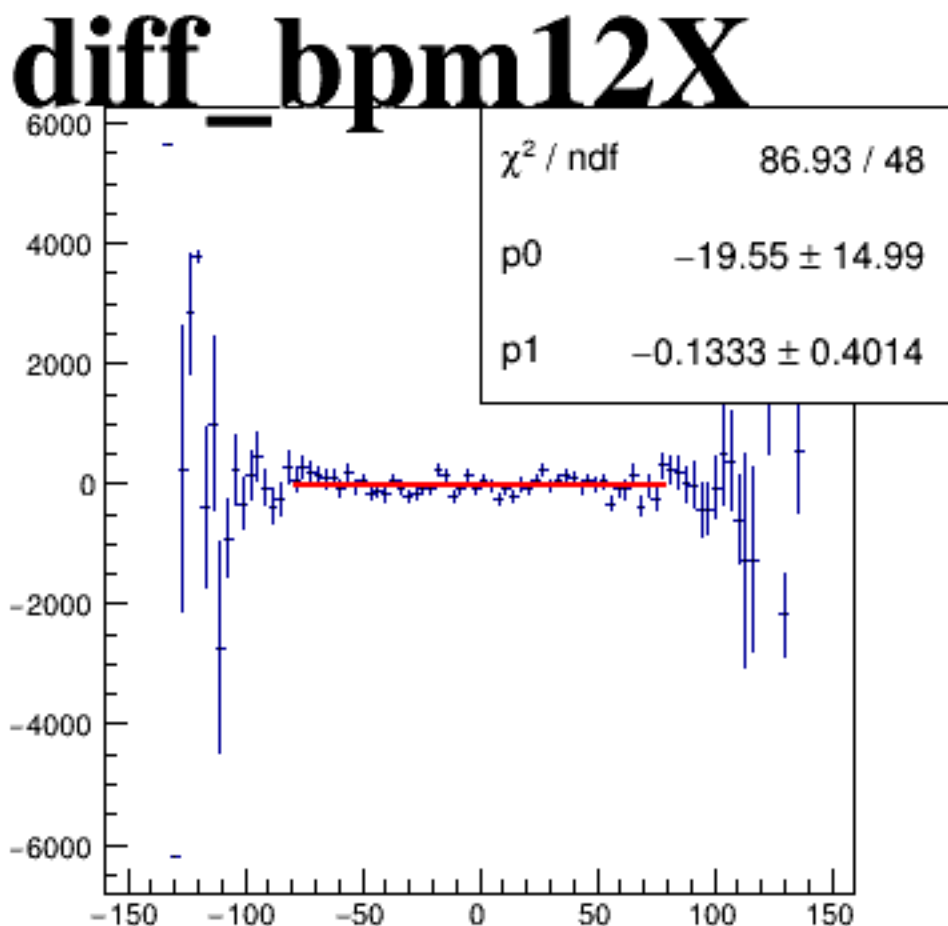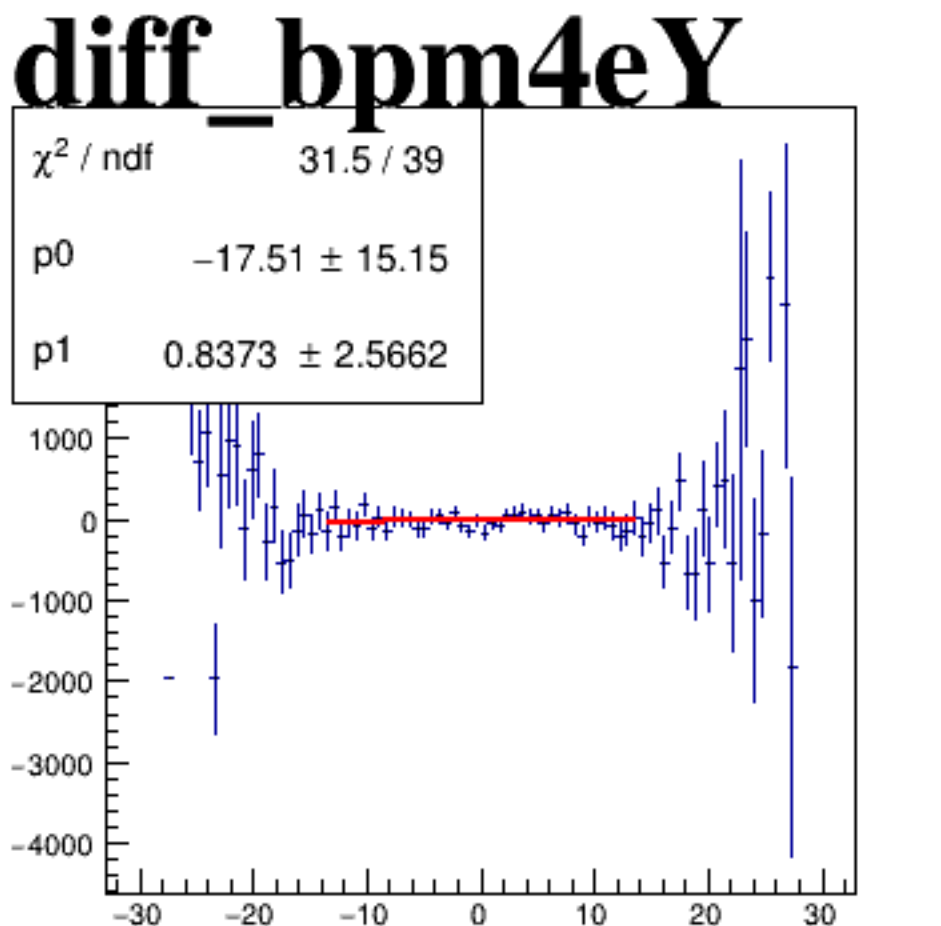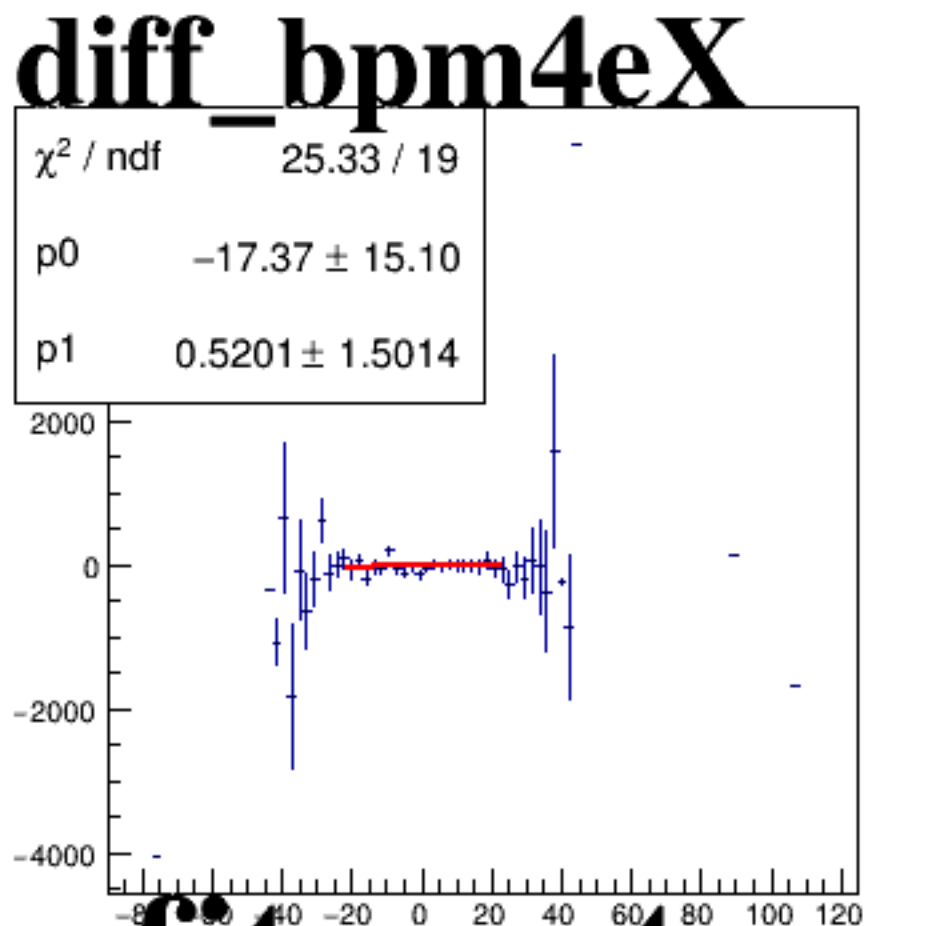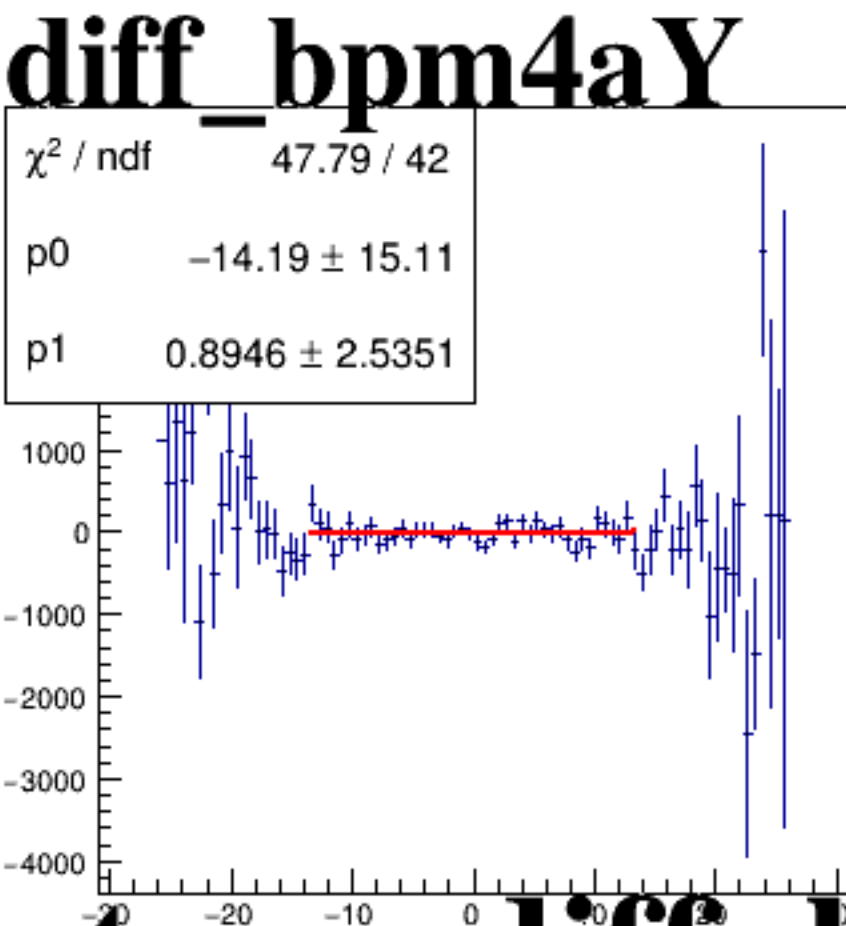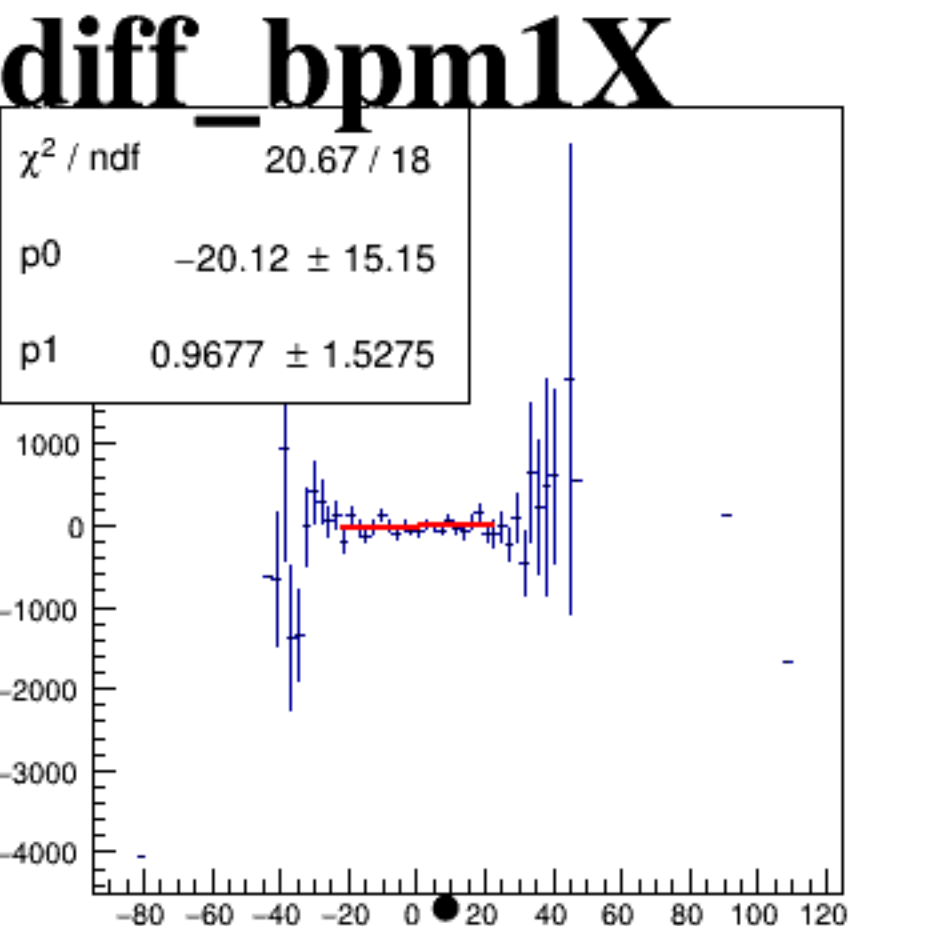






asym_atl1

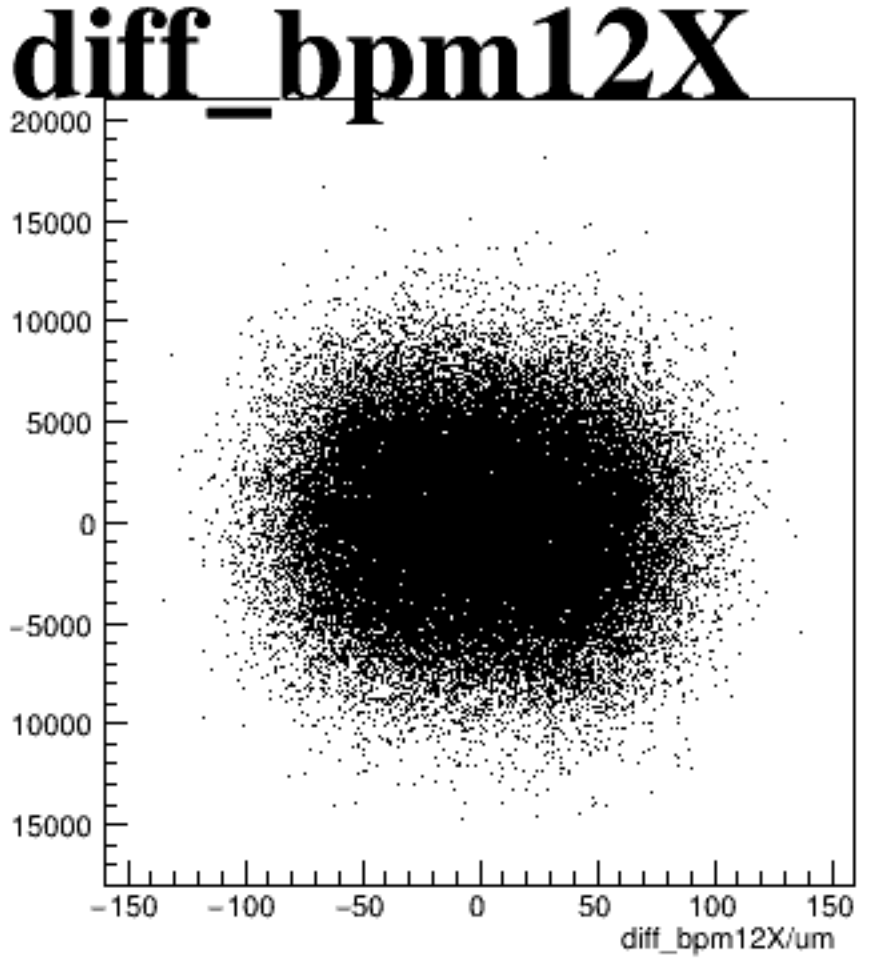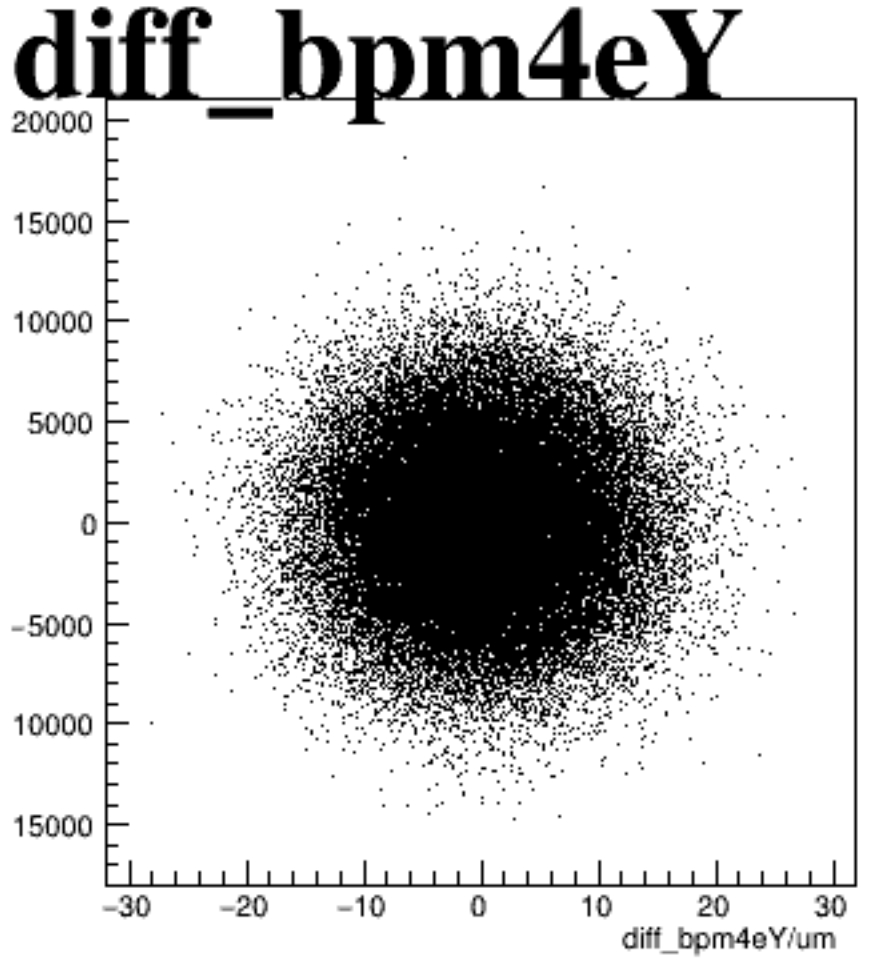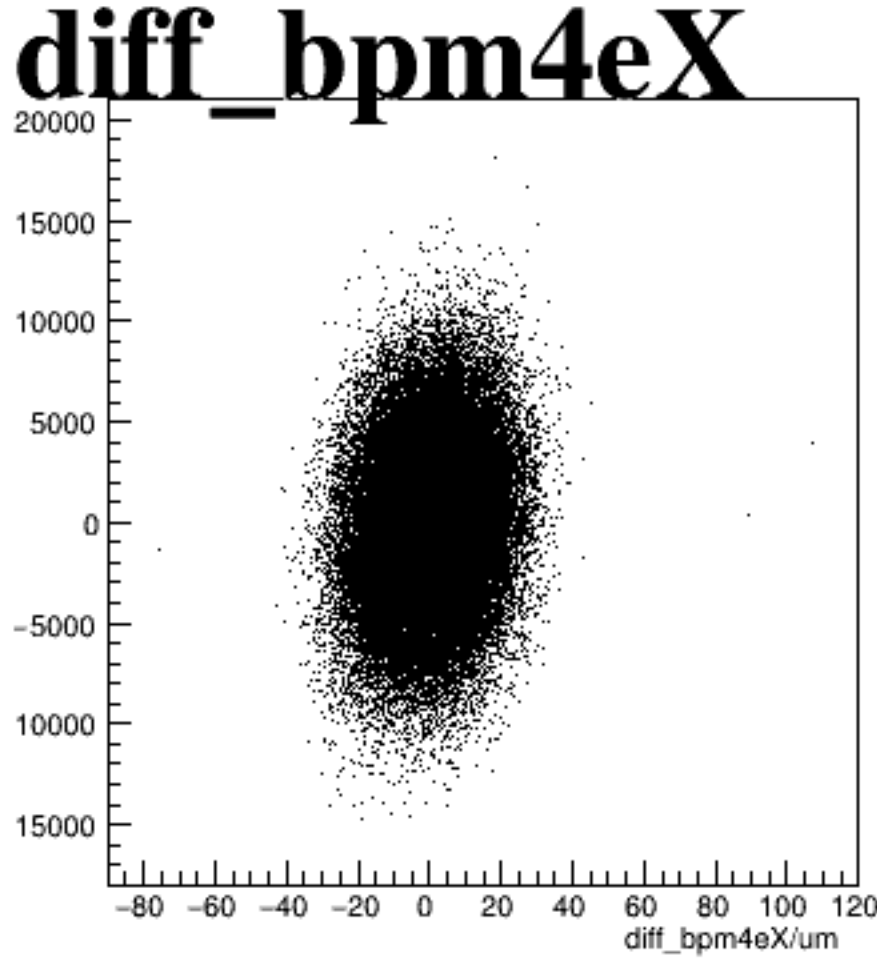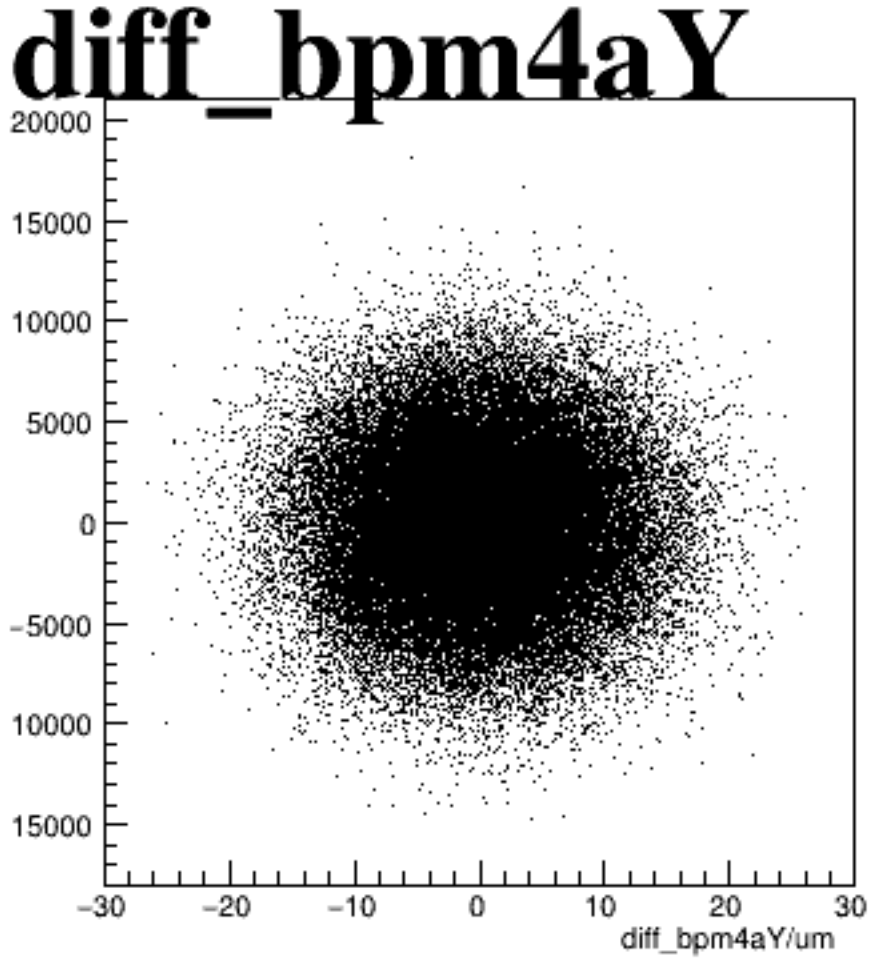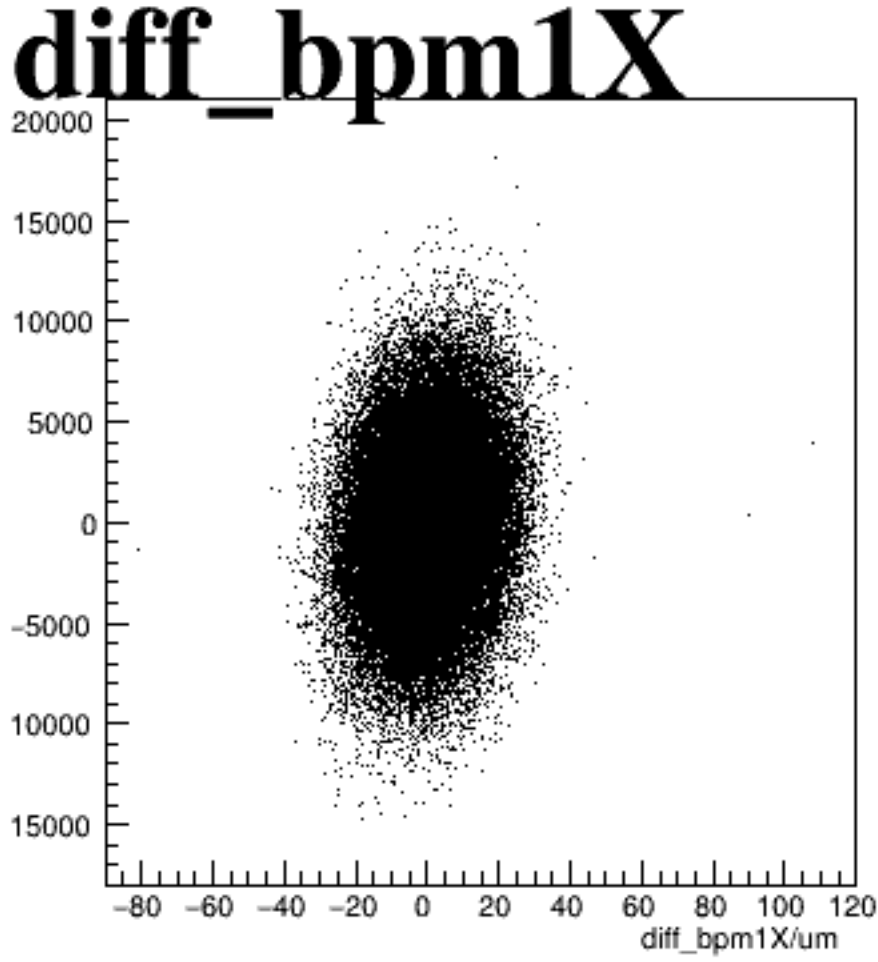






asym_atr1

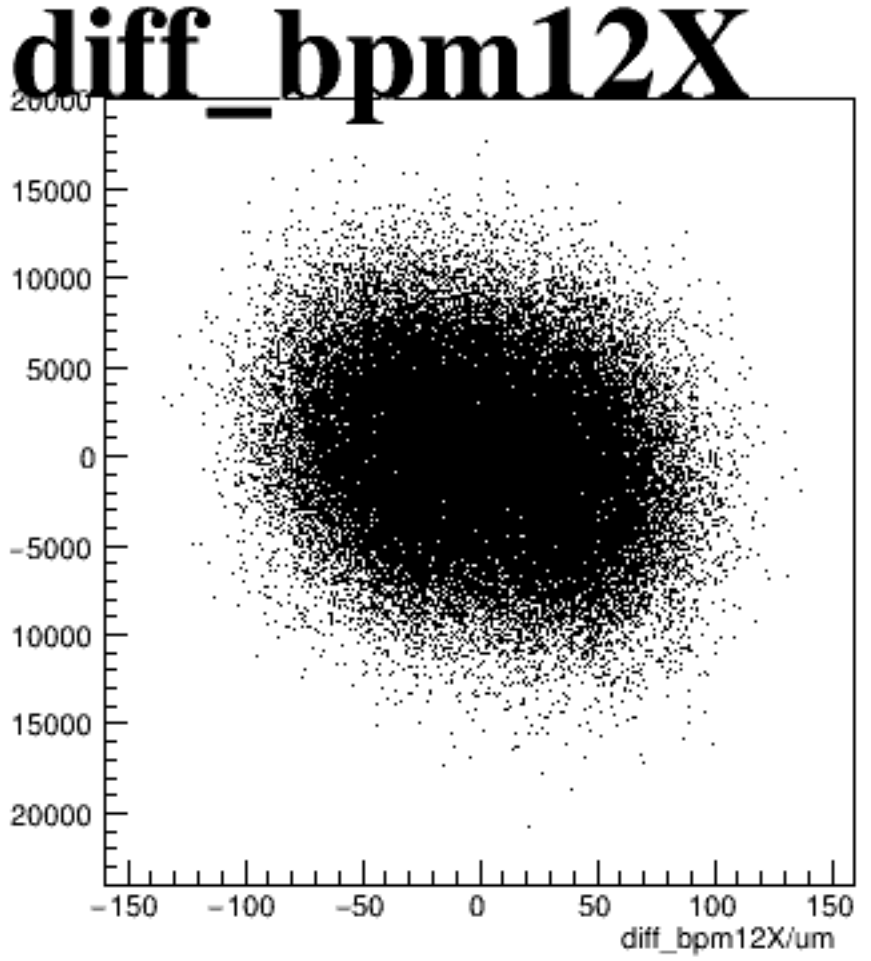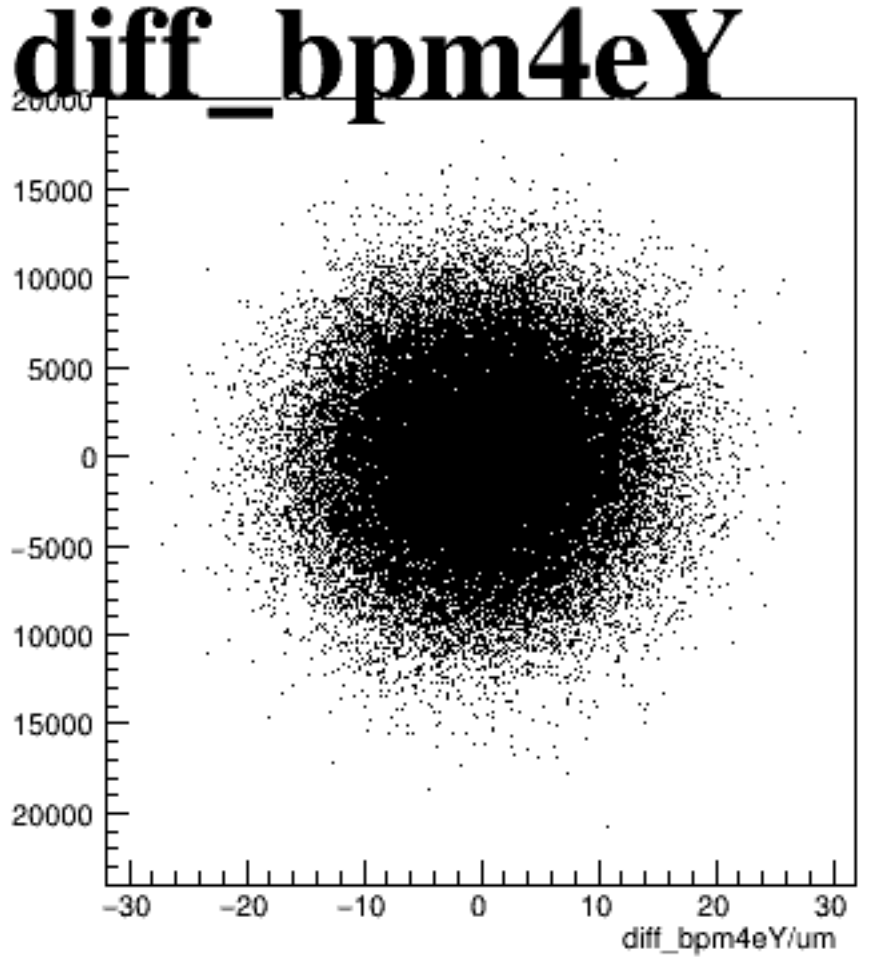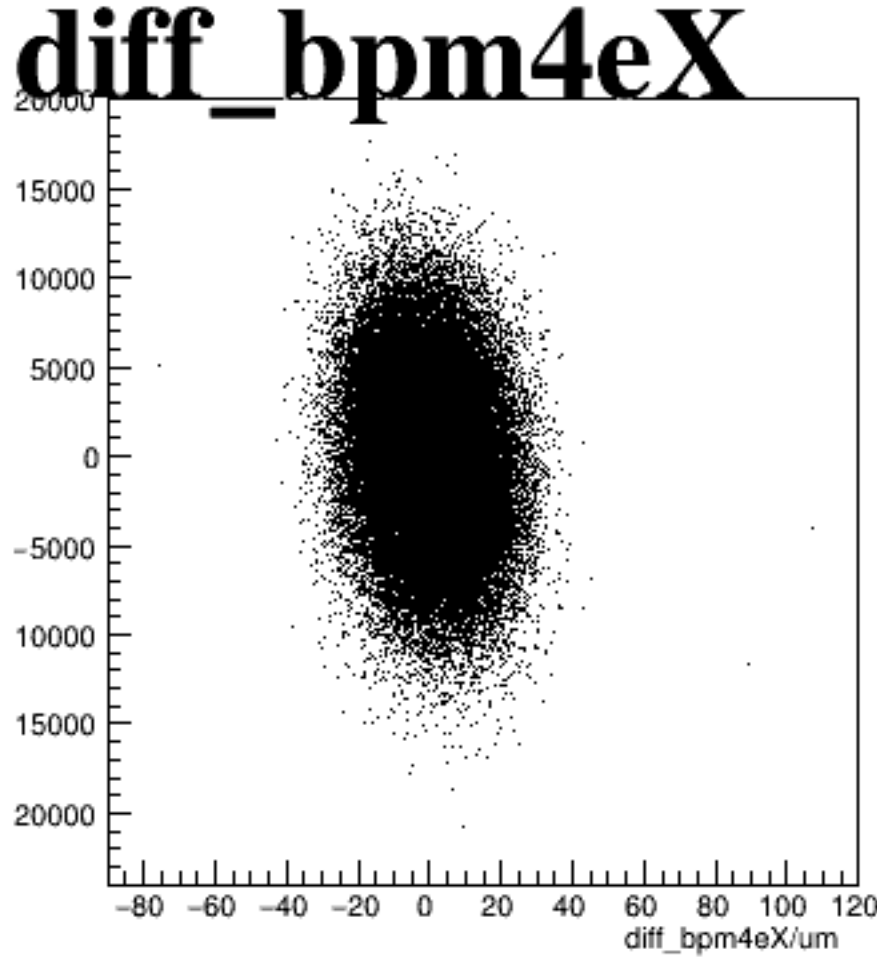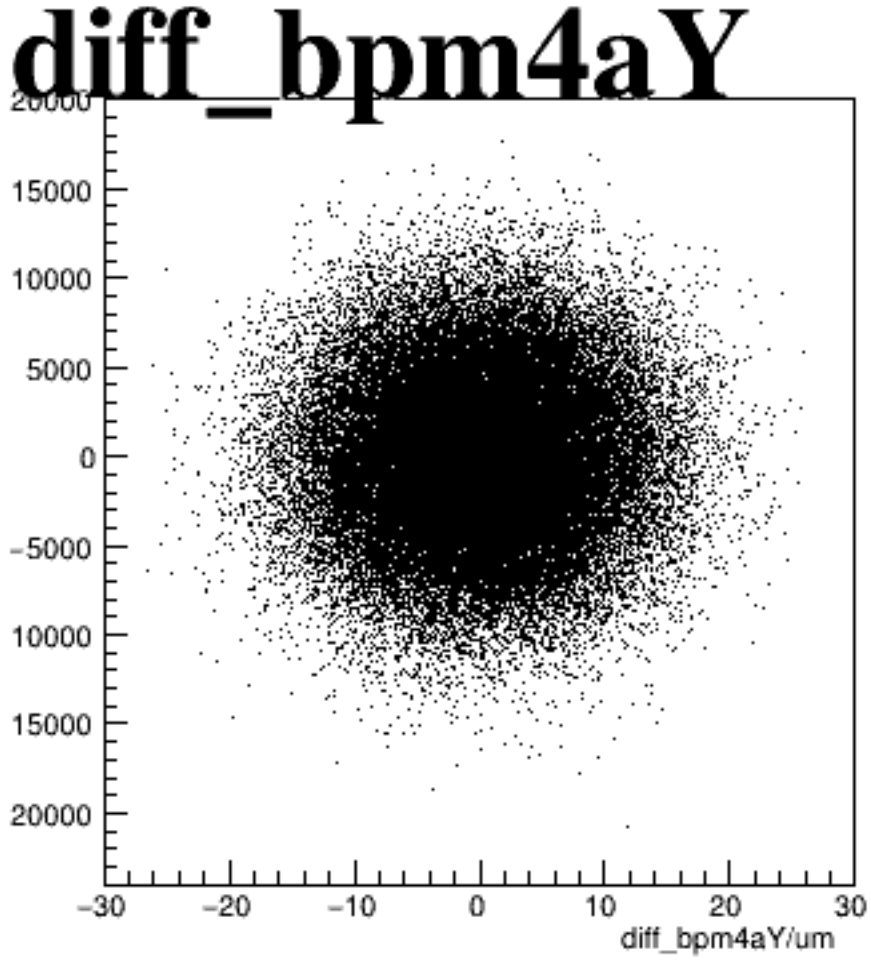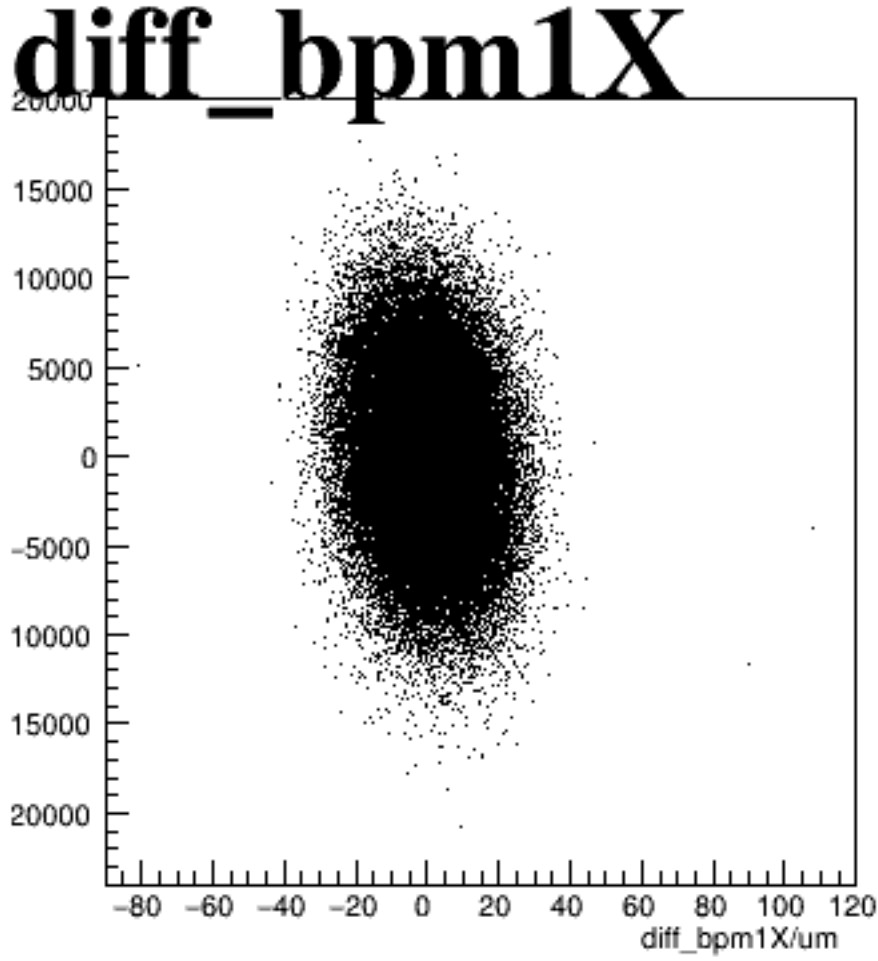

asym_atl2

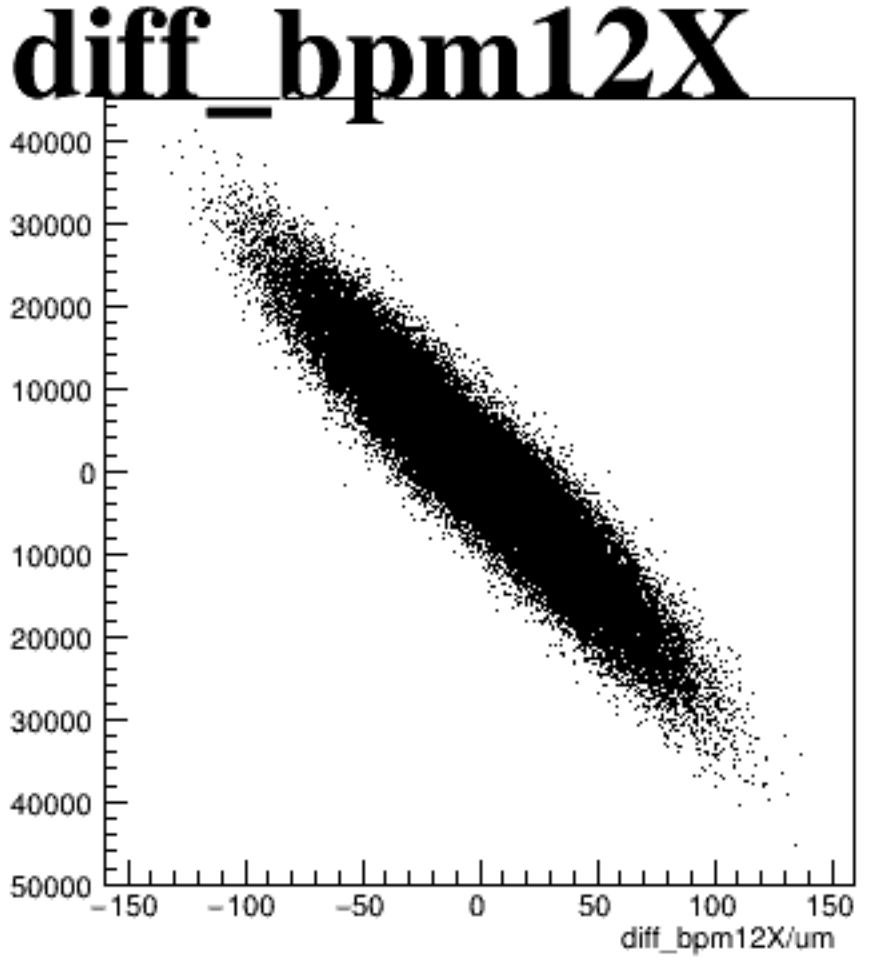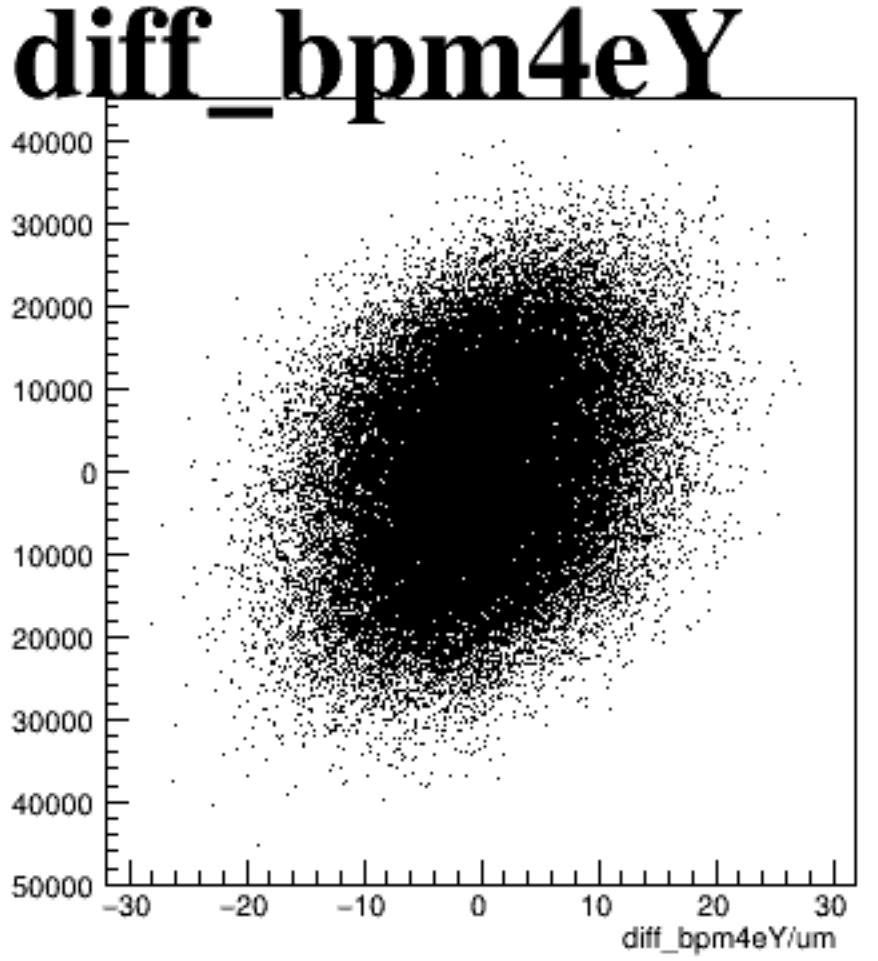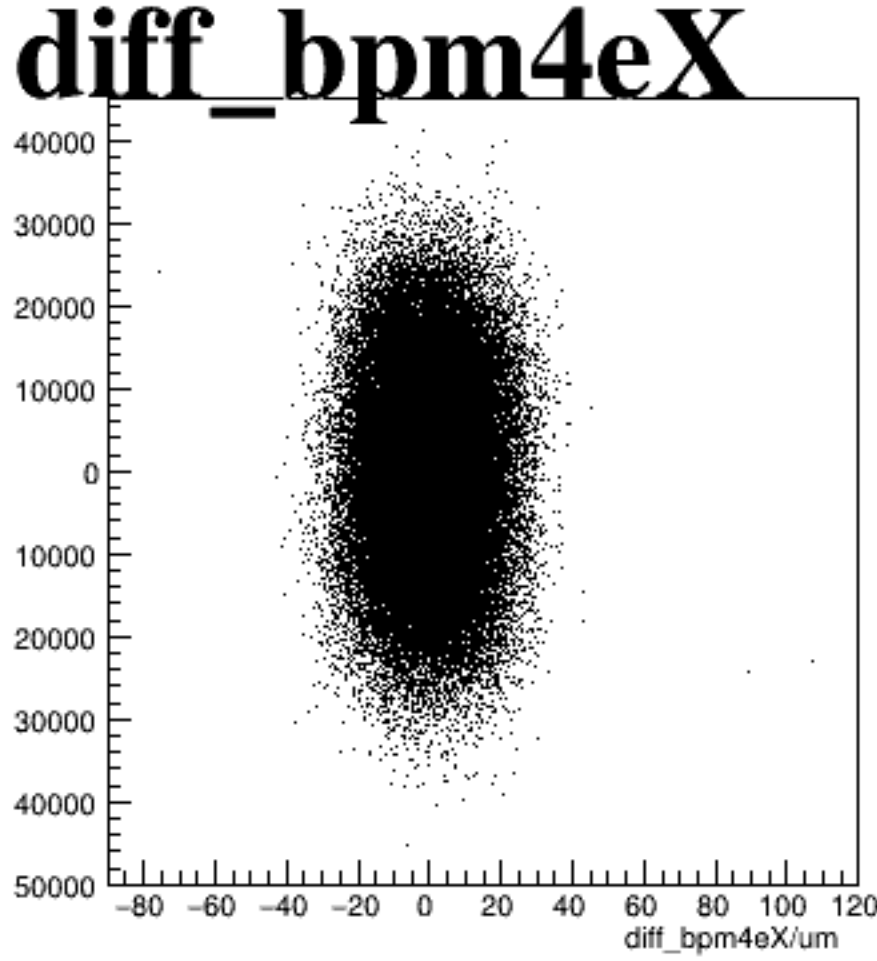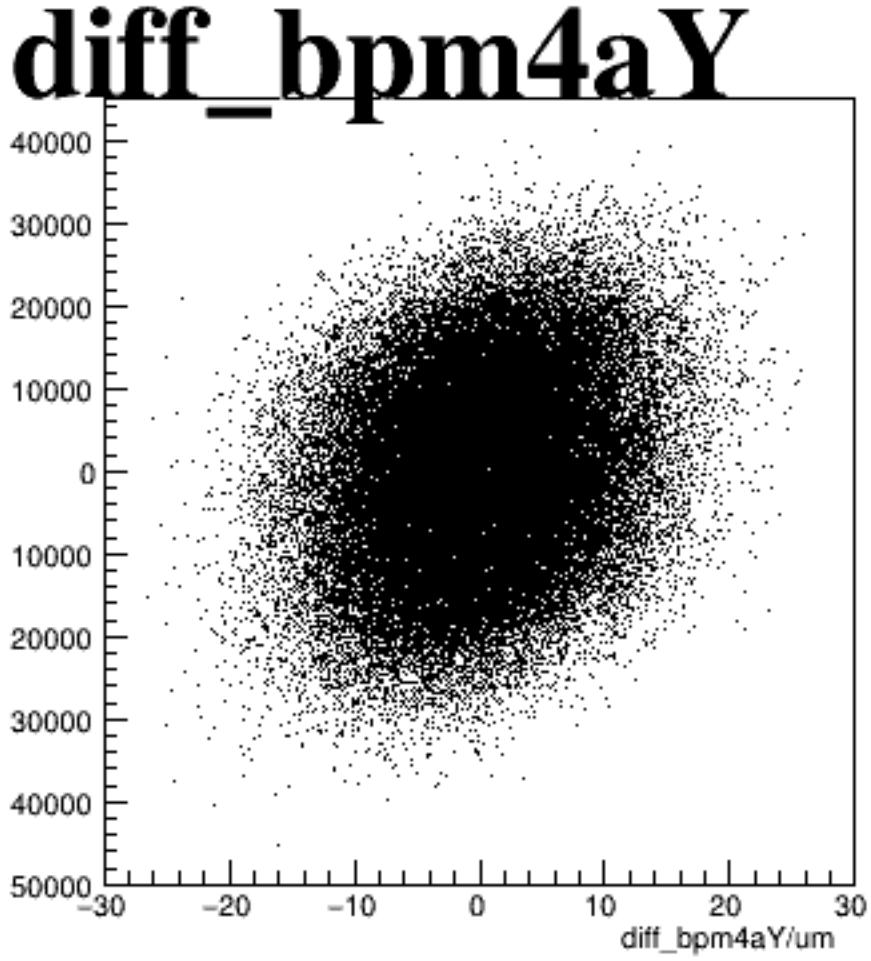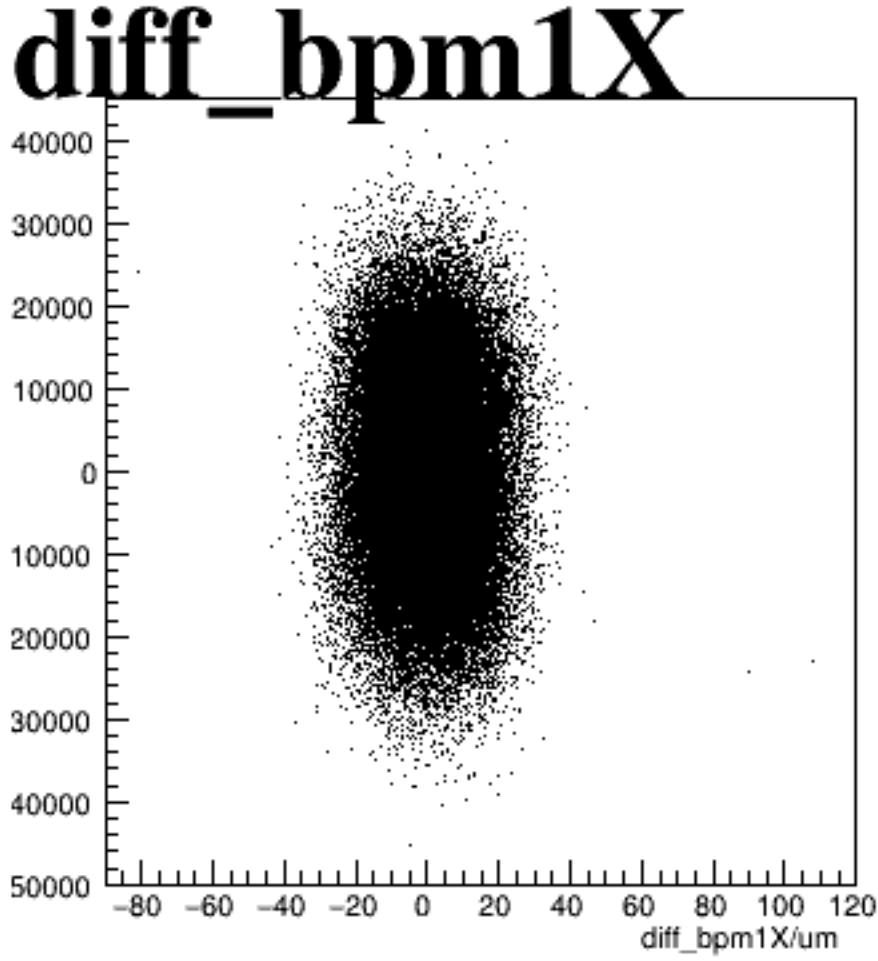

asym_atr2

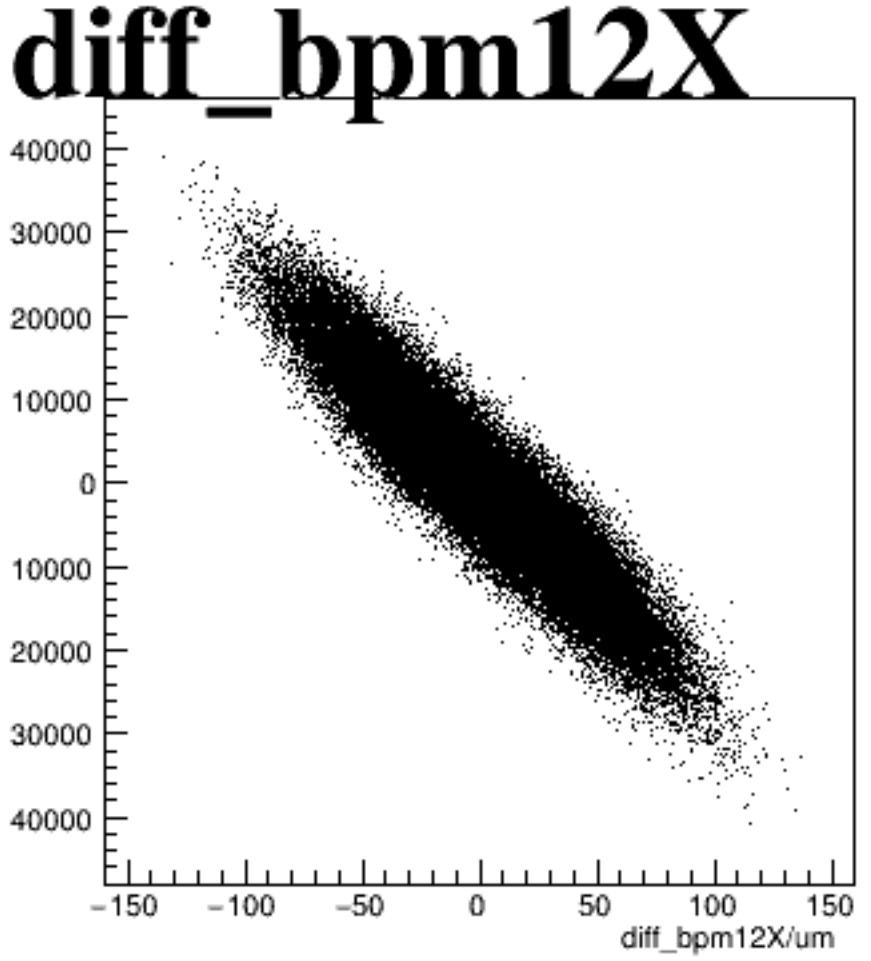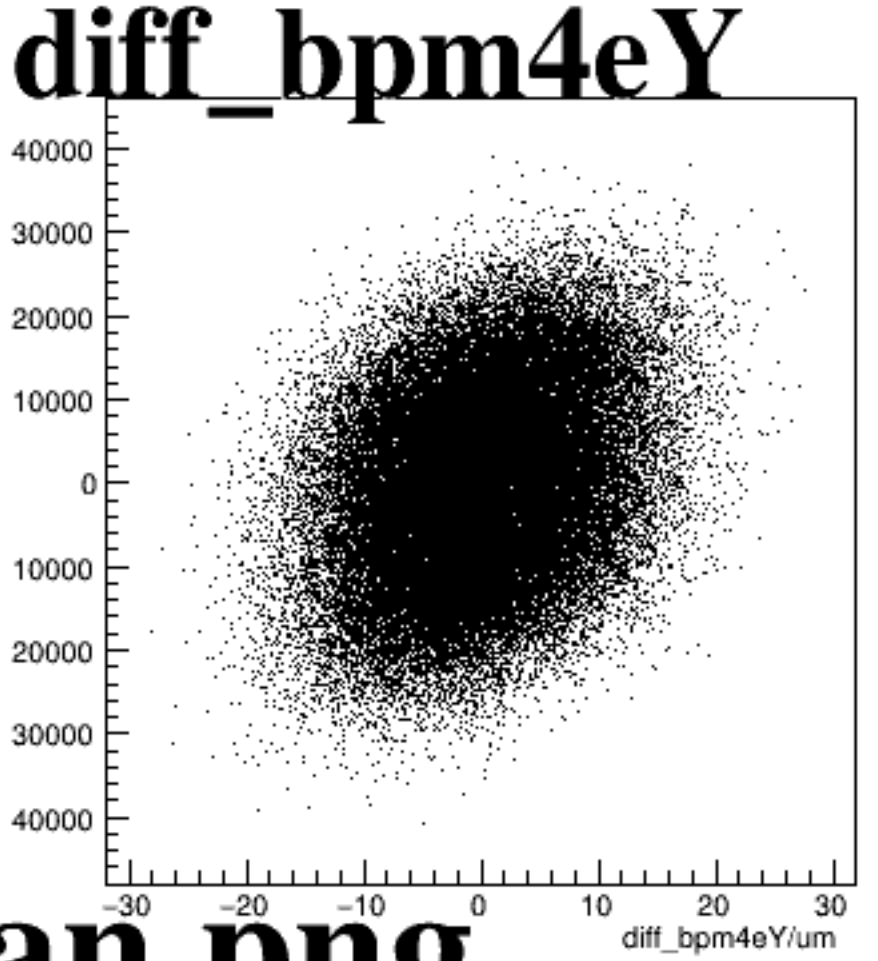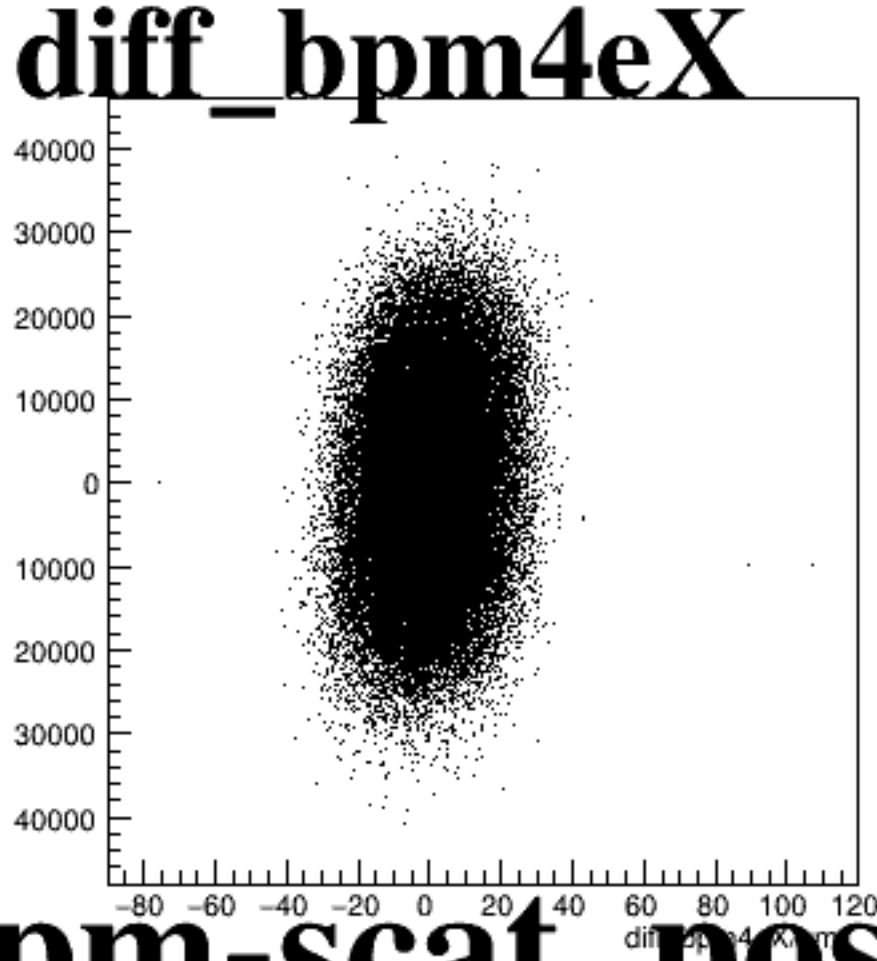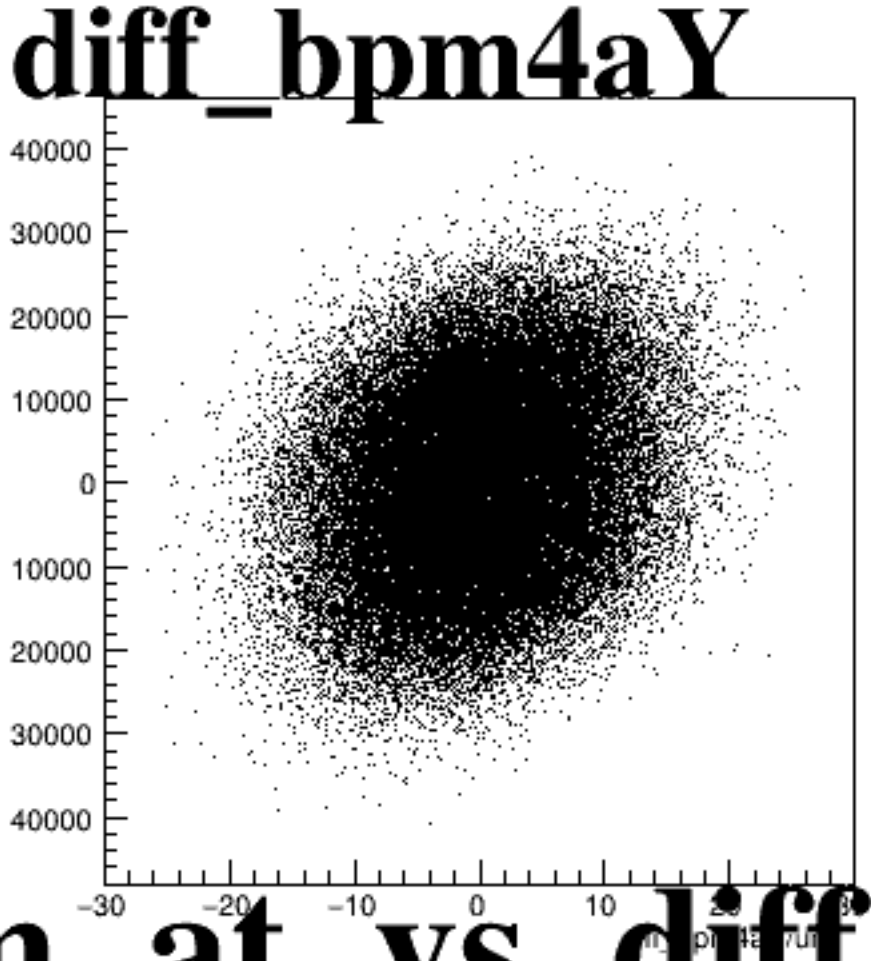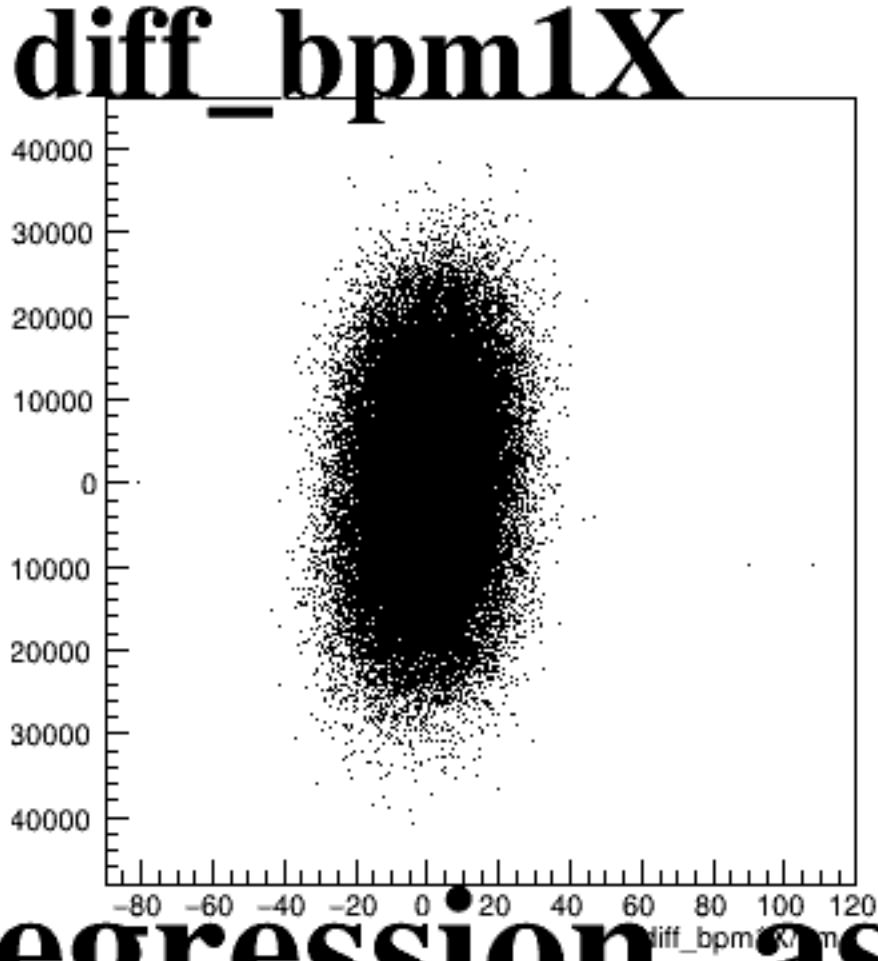

The figure displays five scatter plots, each representing the difference between two measurement methods for a specific beam parameter. The plots are arranged horizontally and labeled as follows:

- diff_bpm1X**: The x-axis is labeled $\text{diff_bpm1X}/\mu\text{m}$ and ranges from -80 to 120. The y-axis ranges from -20000 to 20000.
- diff_bpm4aY**: The x-axis is labeled $\text{diff_bpm4aY}/\mu\text{m}$ and ranges from -30 to 30. The y-axis ranges from -20000 to 20000.
- diff_bpm4eX**: The x-axis is labeled $\text{diff_bpm4eX}/\mu\text{m}$ and ranges from -80 to 120. The y-axis ranges from -20000 to 20000.
- diff_bpm4eY**: The x-axis is labeled $\text{diff_bpm4eY}/\mu\text{m}$ and ranges from -30 to 30. The y-axis ranges from -20000 to 20000.
- diff_bpm12X**: The x-axis is labeled $\text{diff_bpm12X}/\mu\text{m}$ and ranges from -150 to 150. The y-axis ranges from -20000 to 20000.

In all plots, the data points form a dense, roughly elliptical cloud centered at the origin (0,0), indicating that the differences between the two measurement methods are generally small and centered around zero for these parameters.